

COMPAL CONFIDENTIAL

MODEL NAME : *IBQ00*

PCB NO : *LA-3301P (DA80000771L)*

BOM P/N : *45144631L01*

M08 (UMA) Briscoe
uFCPGA Mobile Merom
Intel Crestline + ICH8M

2007-03-07

REV : 1.0 (A00)

DAZ P/N: DAZZGX0010L

MB PCB

Part Number	Description
DA80000771L	PCB ZGX LA-3301P REV1 M/B UMA

PCB1

IBQ00

LS-3301P REV1

LED/B

LS-3301P REV1 LED/B

PCB1

IBQ00

LS-3302P REV1


IOB

LS-3302P I/O Board

BOM NO. 45144631L01
PCB P/N: DA80000771L

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

DELL CONFIDENTIAL/PROPRIETARY



Compal Electronics, Inc.

Title

Cover Sheet

Size

Document Number

LA-3301P

Rev

1.0

Date

Wednesday, March 07, 2007


Sheet

1

of

58

Block Diagram
Compal confidential
Model : IBQ00

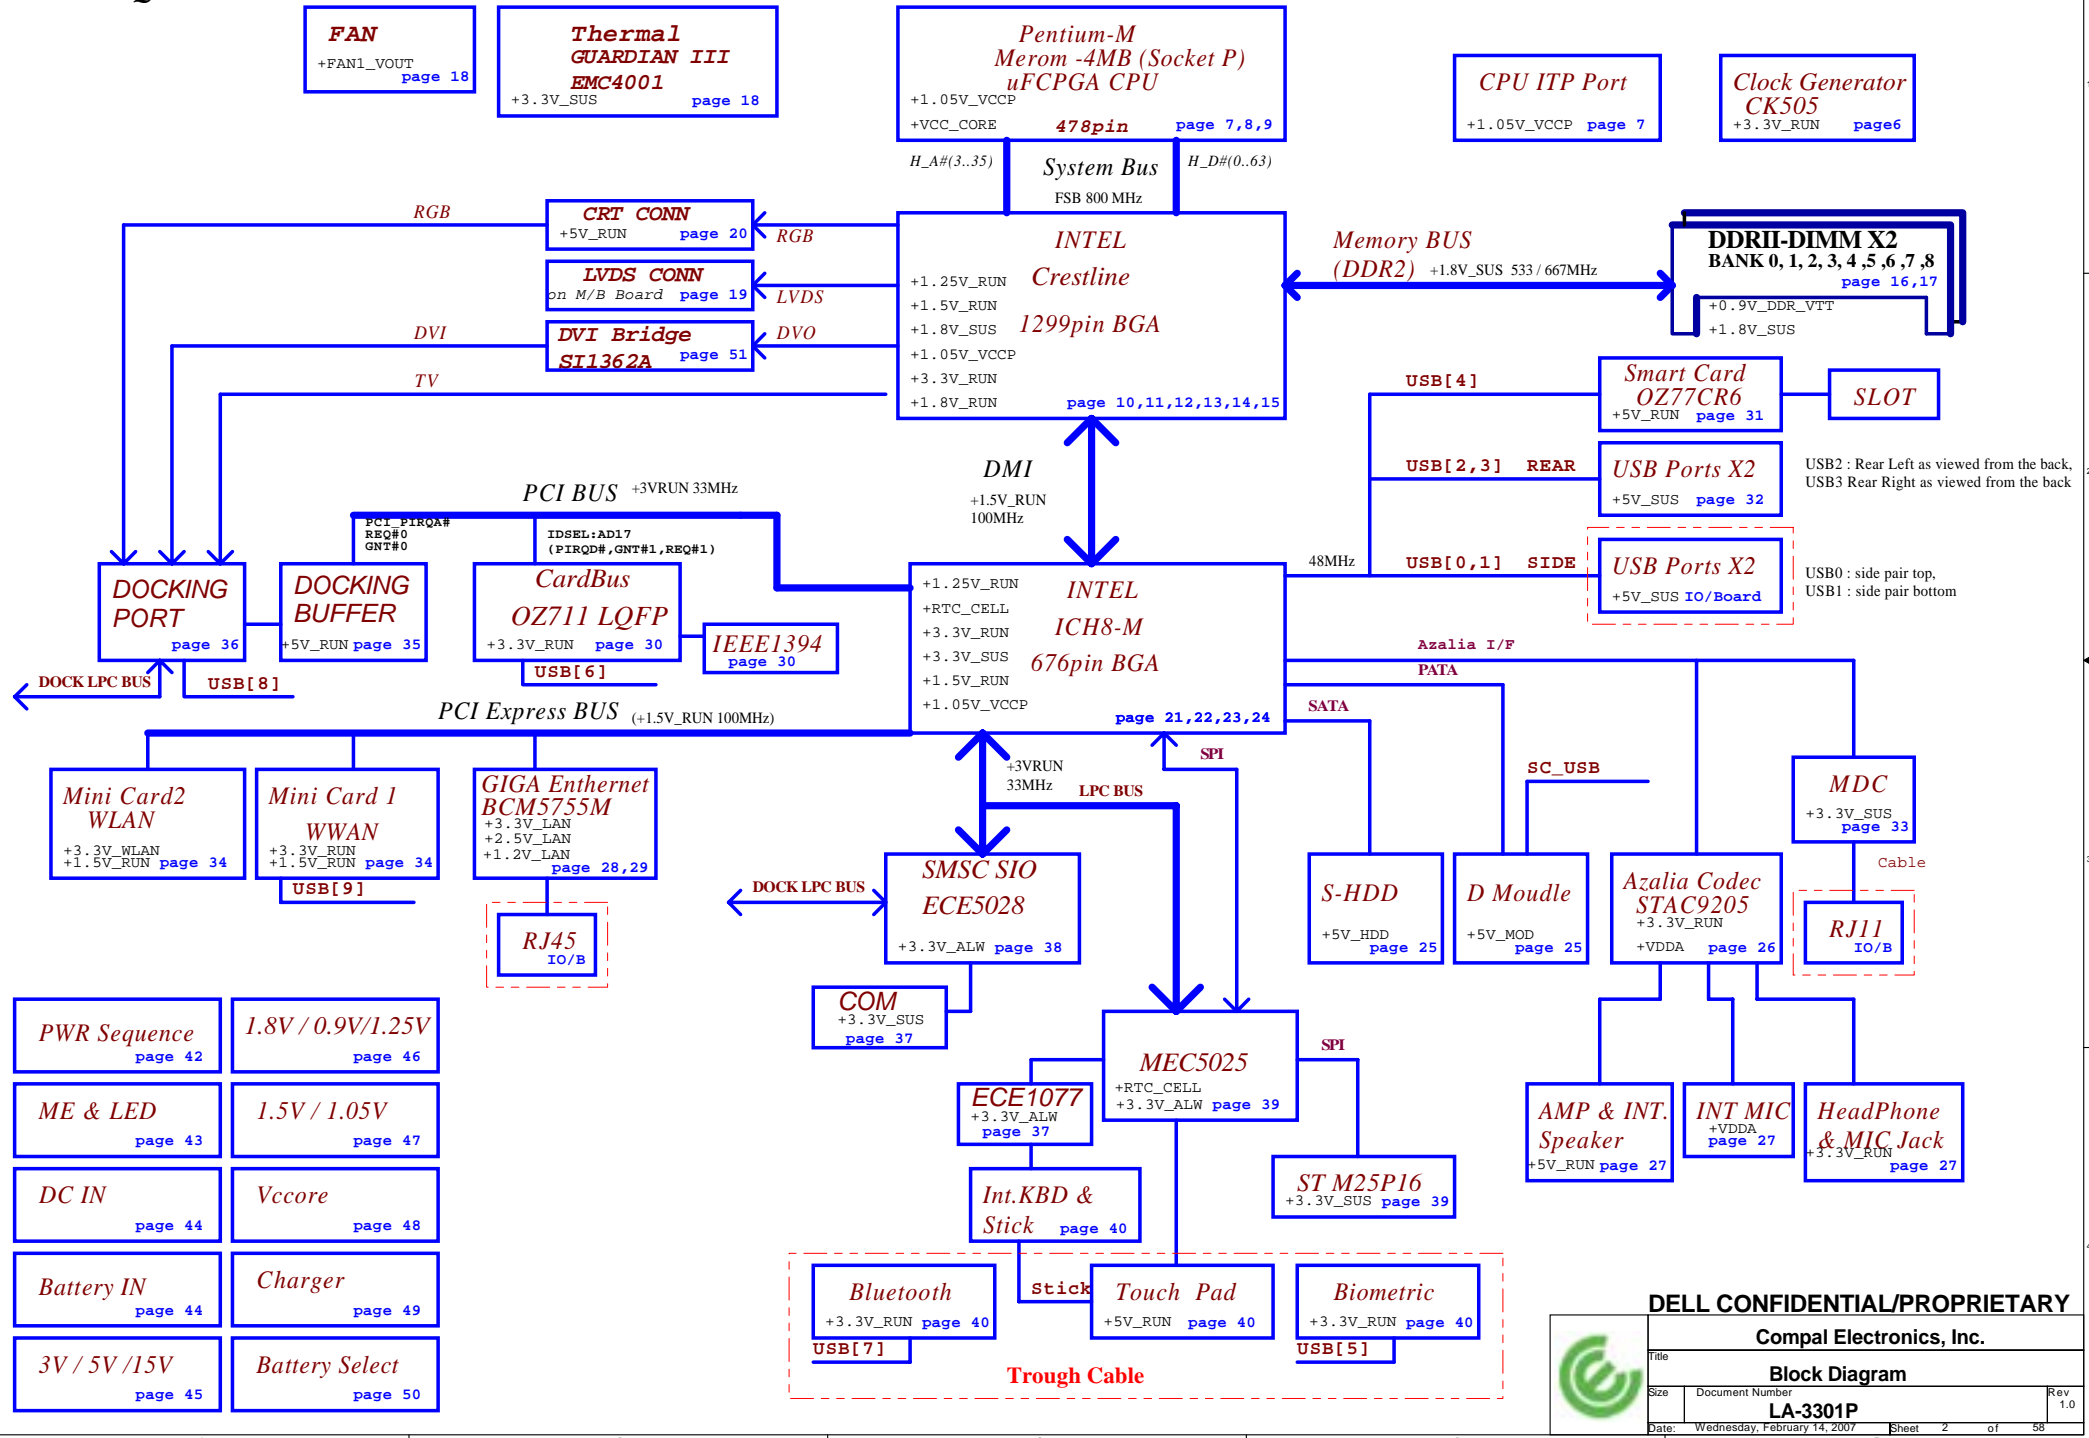

POWER STATES

Signal State	SLP S3#	SLP S4#	SLP S5#	S4 STATE#	SLP M#	ALWAYS PLANE	M PLANE	SUS PLANE	RUN PLANE	CLOCKS
S0 (Full ON) / M0	HIGH	HIGH	HIGH	HIGH	HIGH	ON	ON	ON	ON	ON
S3 (Suspend to RAM) / M1	LOW	HIGH	HIGH	HIGH	HIGH	ON	ON	ON	OFF	ON
S4 (Suspend to DISK) / M1	LOW	HIGH	HIGH	LOW	HIGH	ON	ON	ON	OFF	ON
S5 (SOFT OFF) / M1	LOW	HIGH	LOW	LOW	HIGH	ON	ON	ON	OFF	ON
S3 (Suspend to RAM) / M-OFF	LOW	HIGH	HIGH	HIGH	LOW	ON	OFF	ON	OFF	OFF
S4 (Suspend to DISK) / M-OFF	LOW	LOW	HIGH	LOW	LOW	ON	OFF	OFF	OFF	OFF
S5 (SOFT OFF) / M-OFF	LOW	LOW	LOW	LOW	LOW	ON	OFF	OFF	OFF	OFF

PM TABLE

power plane State	+15V_ALW +5V_ALW +3.3V_ALW +3.3V_RTC_LDO	+5V_SUS +3.3V_SUS +1.8V_SUS	+5V_RUN +3.3V_RUN +2.5V_RUN +1.8V_RUN +1.5V_RUN +0.9V_DDR_VTT +VCC_CORE +1.05V_VCCP +1.25V_RUN
S0	ON	ON	ON
S3	ON	ON	OFF
S5 S4/AC	ON	OFF	OFF
S5 S4/AC don't exist	OFF	OFF	OFF

PCI TABLE

PCI DEVICE	IDSEL	REQ#/GNT#	PIRQ
OZ711	AD17	REQ#1 / GNT#1	PIRQD
Docking	AD24	REQ#0 / GNT#0	PIRQA

ICH8-M	USB PORT#	DESTINATION
	0	Side Top
	1	Side Bottom
	2	Rear Left
	3	Rear Right
	4	Smart Card
	5	Biometric
	6	Card Bus
	7	Bluetooth
	8	Docking
ECE 5028	9	WWAN
	1	None
	2	None
	3	None
	4	None

PCI EXPRESS	DESTINATION
Lane 1	MINI CARD-1 WWAN
Lane 2	MINI CARD-2 WLAN
Lane 3	None
Lane 4	None
Lane 5	None
Lane 6	GIGA LAN


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.




Title	Index and Config.		
Size	Document Number	Rev 1.0	
Date	Wednesday, February 14, 2007	Sheet 3	of 58

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.


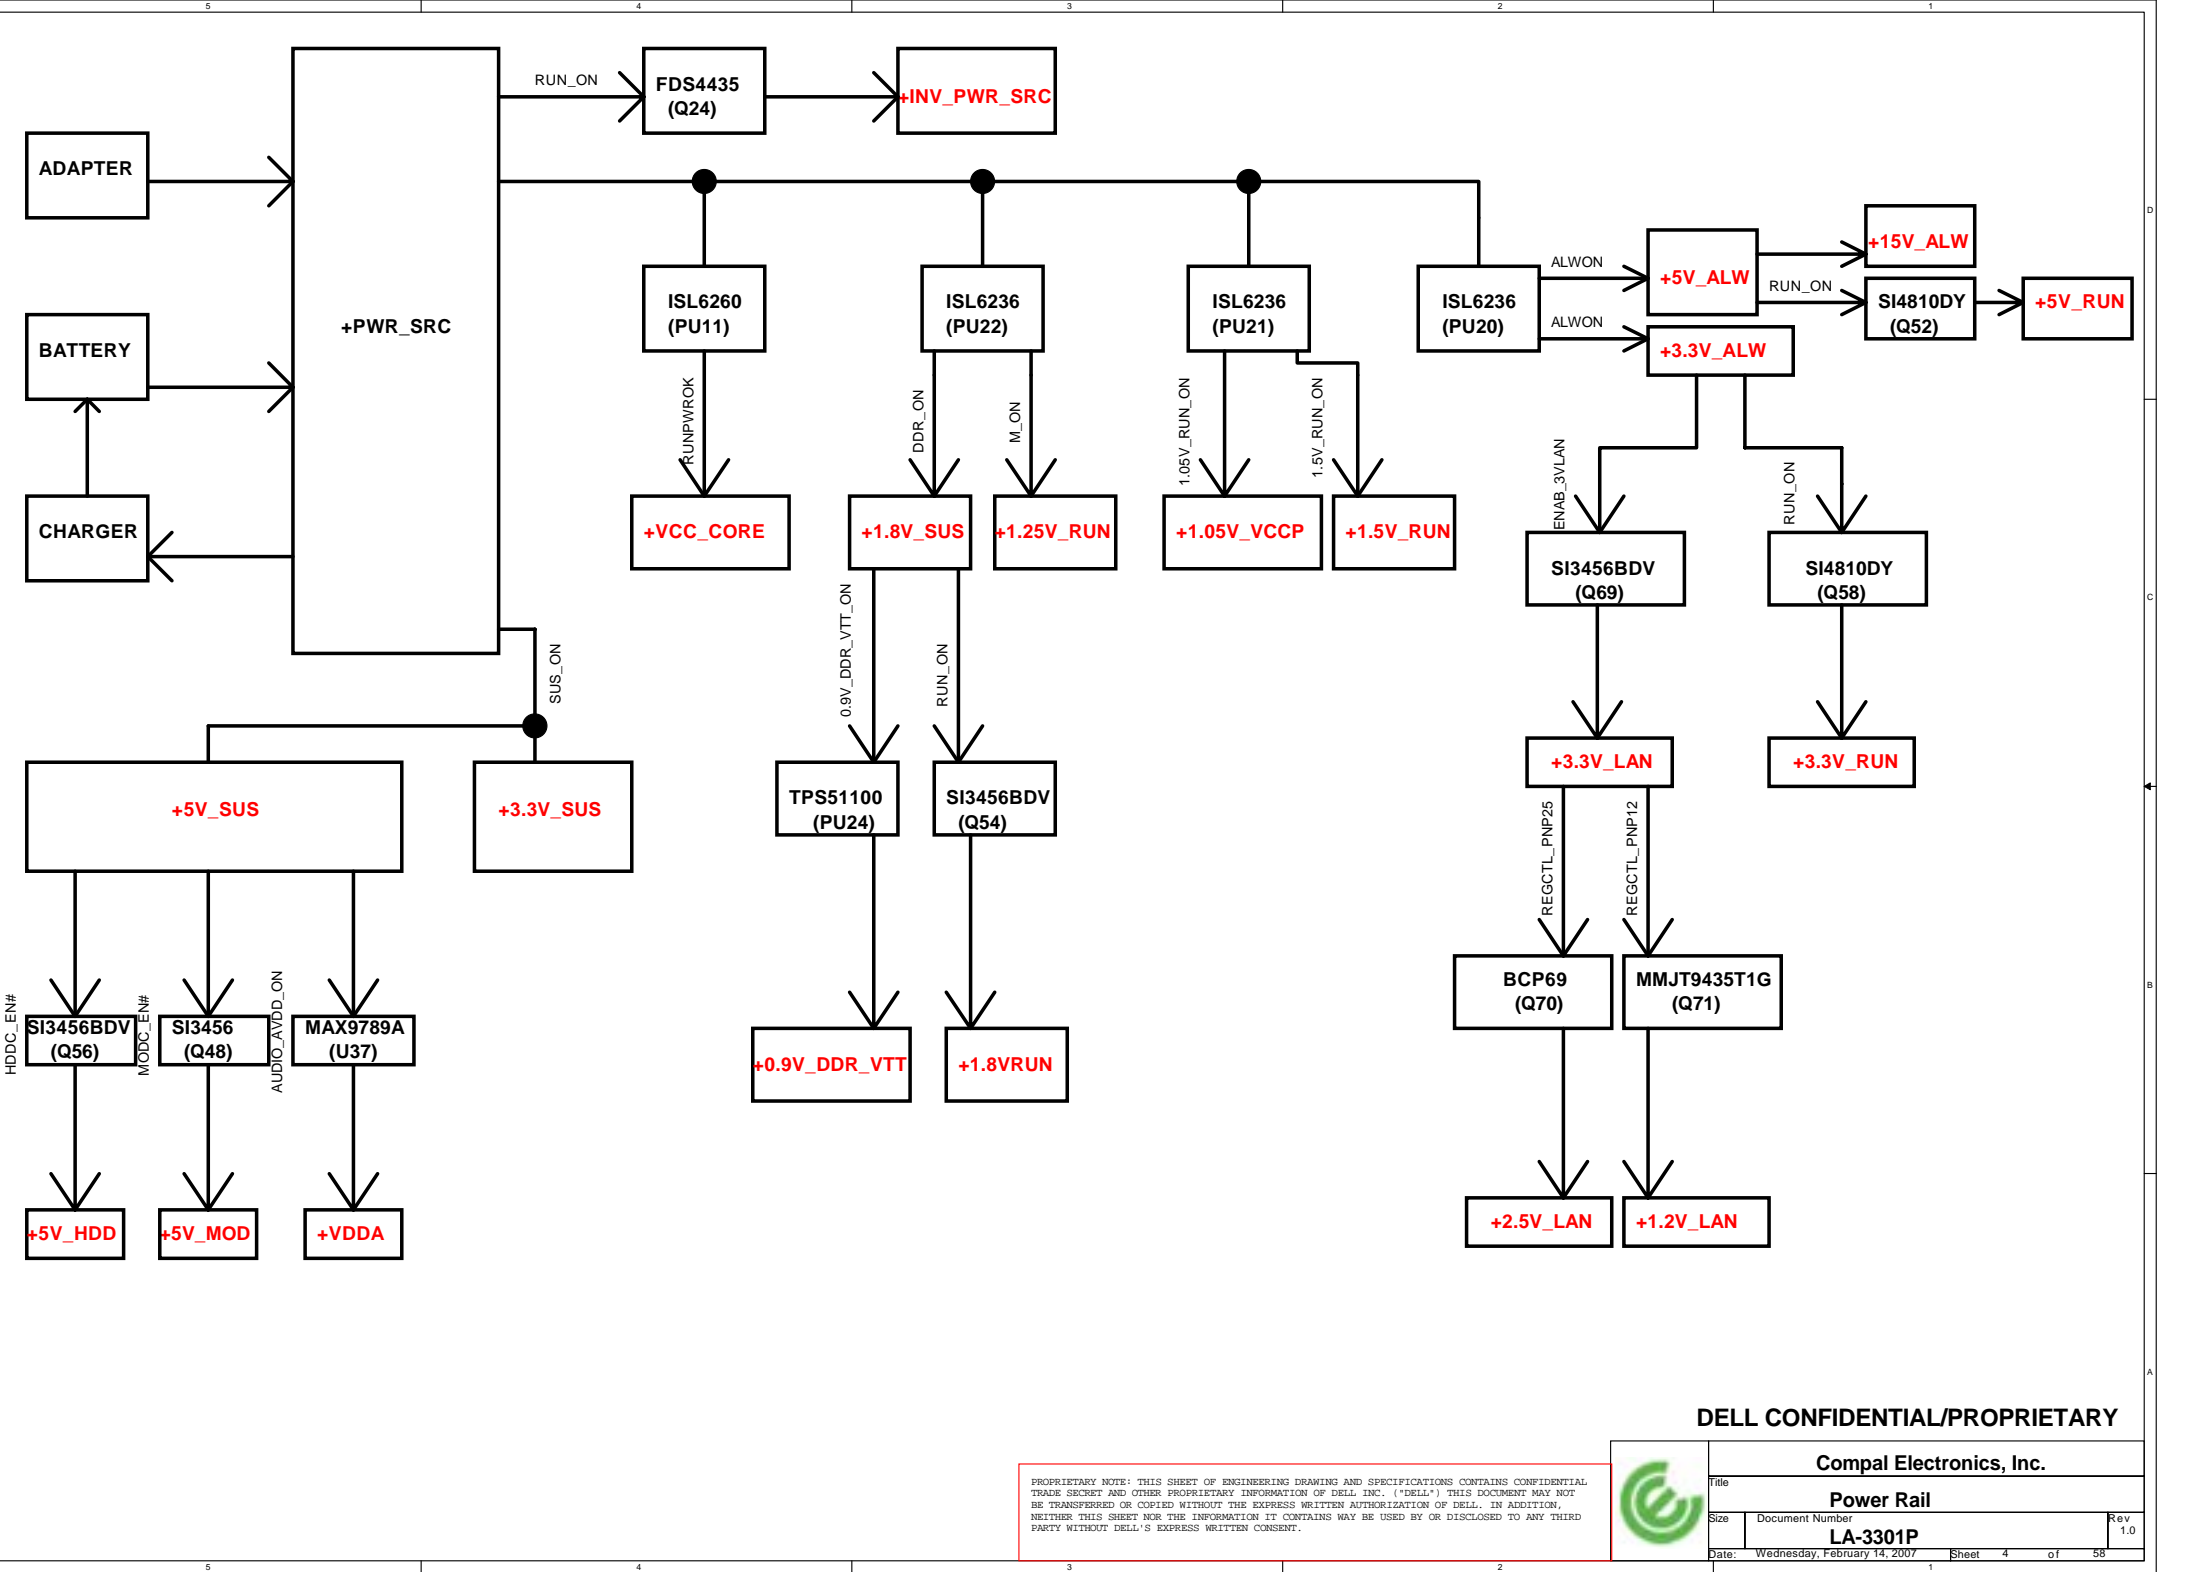



DELL CONFIDENTIAL/PROPRIETARY

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



Compal Electronics, Inc.		
Title Power Rail		
Size	Document Number LA-3301P	Rev 1.0
Date:	Wednesday, February 14, 2007	Sheet 4 of 58

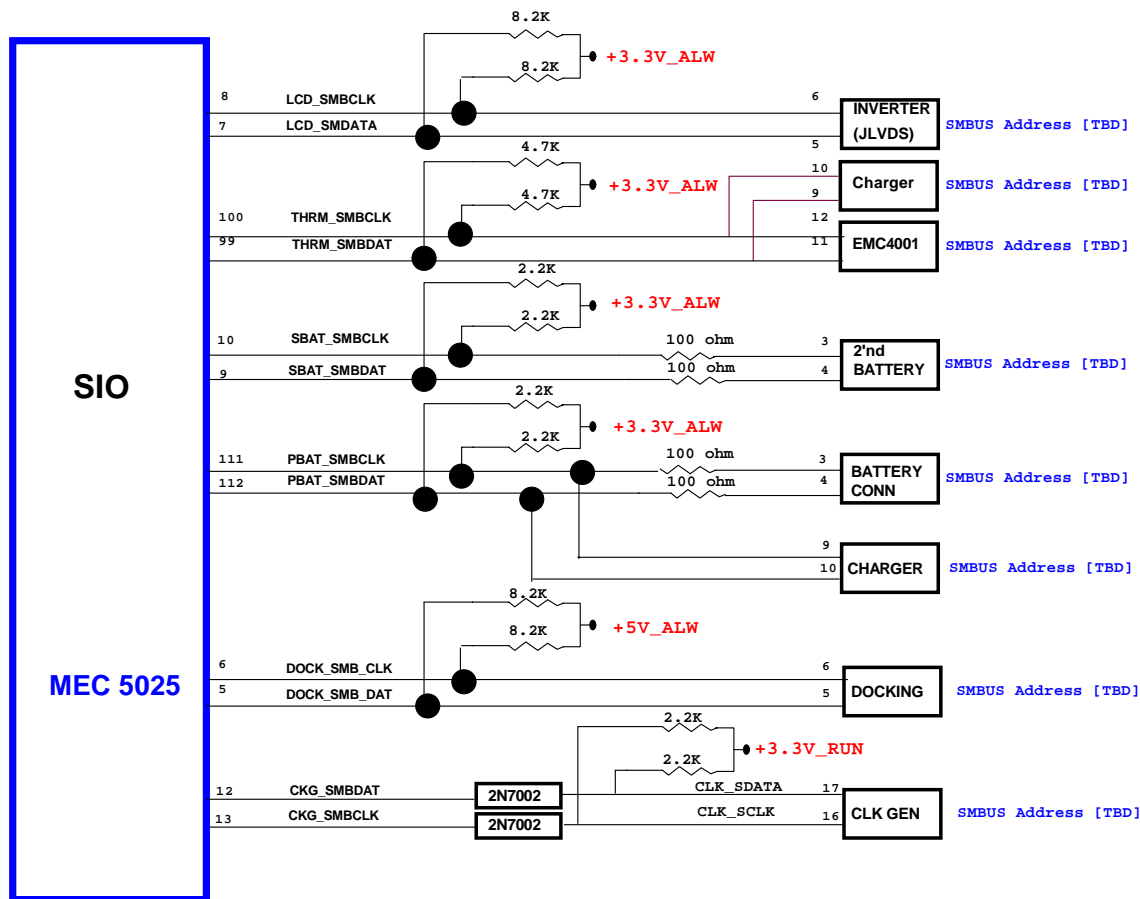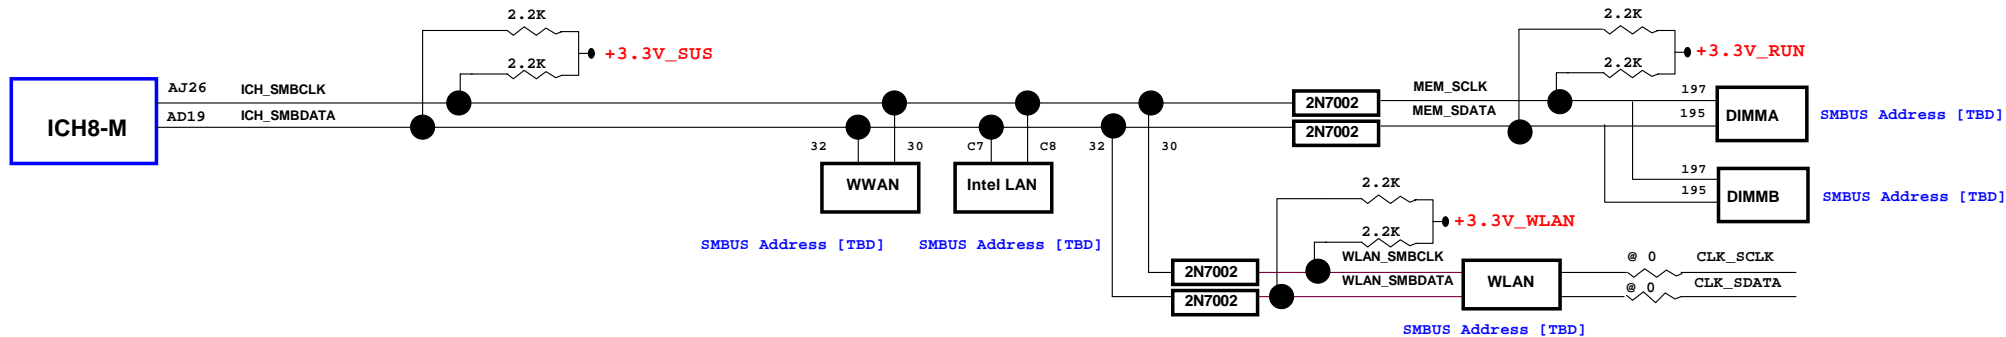


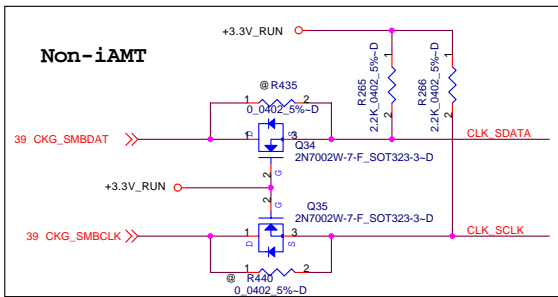

FSC CLKSEL2	FSB CLKSEL1	FSA CLKSELO	CPU MHz	SRC MHz	PCI MHz
0	0	0	266	100	33.3
0	0	1	133	100	33.3
0	1	0	200	100	33.3
0	1	1	166	100	33.3
1	0	0	333	100	33.3
1	0	1	100	100	33.3
1	1	0	400	100	33.3
1	1	1	200	100	33.3

Table : ICS954305AK

CPU_BSEL	CPU_BSEL2(FSC)	CPU_BSEL1(FSB)
133	0	0
166	0	1

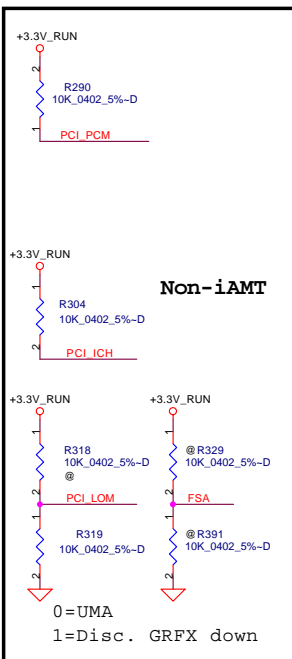


PGMODE	PIN 9
0	VTT_PWRGD#/PD
1	CKPWRGD/PD#

ITP_EN	PIN 37
0	Pin 5/6 as SRC_10
1	Pin 5/6 as CPU_ITP

TME	PIN 32
0	Normal Operation
1	Trusted Mode Enabled

FCTSEL1	PIN43	PIN44	PIN47	PIN48
0=UMA	DOT96T	DOT96C	96/100M_T	96/100M_C
1=DIS	27M_out	27M SSout	SRCT0	SRCC0

Place crystal within 500 mils of CK410

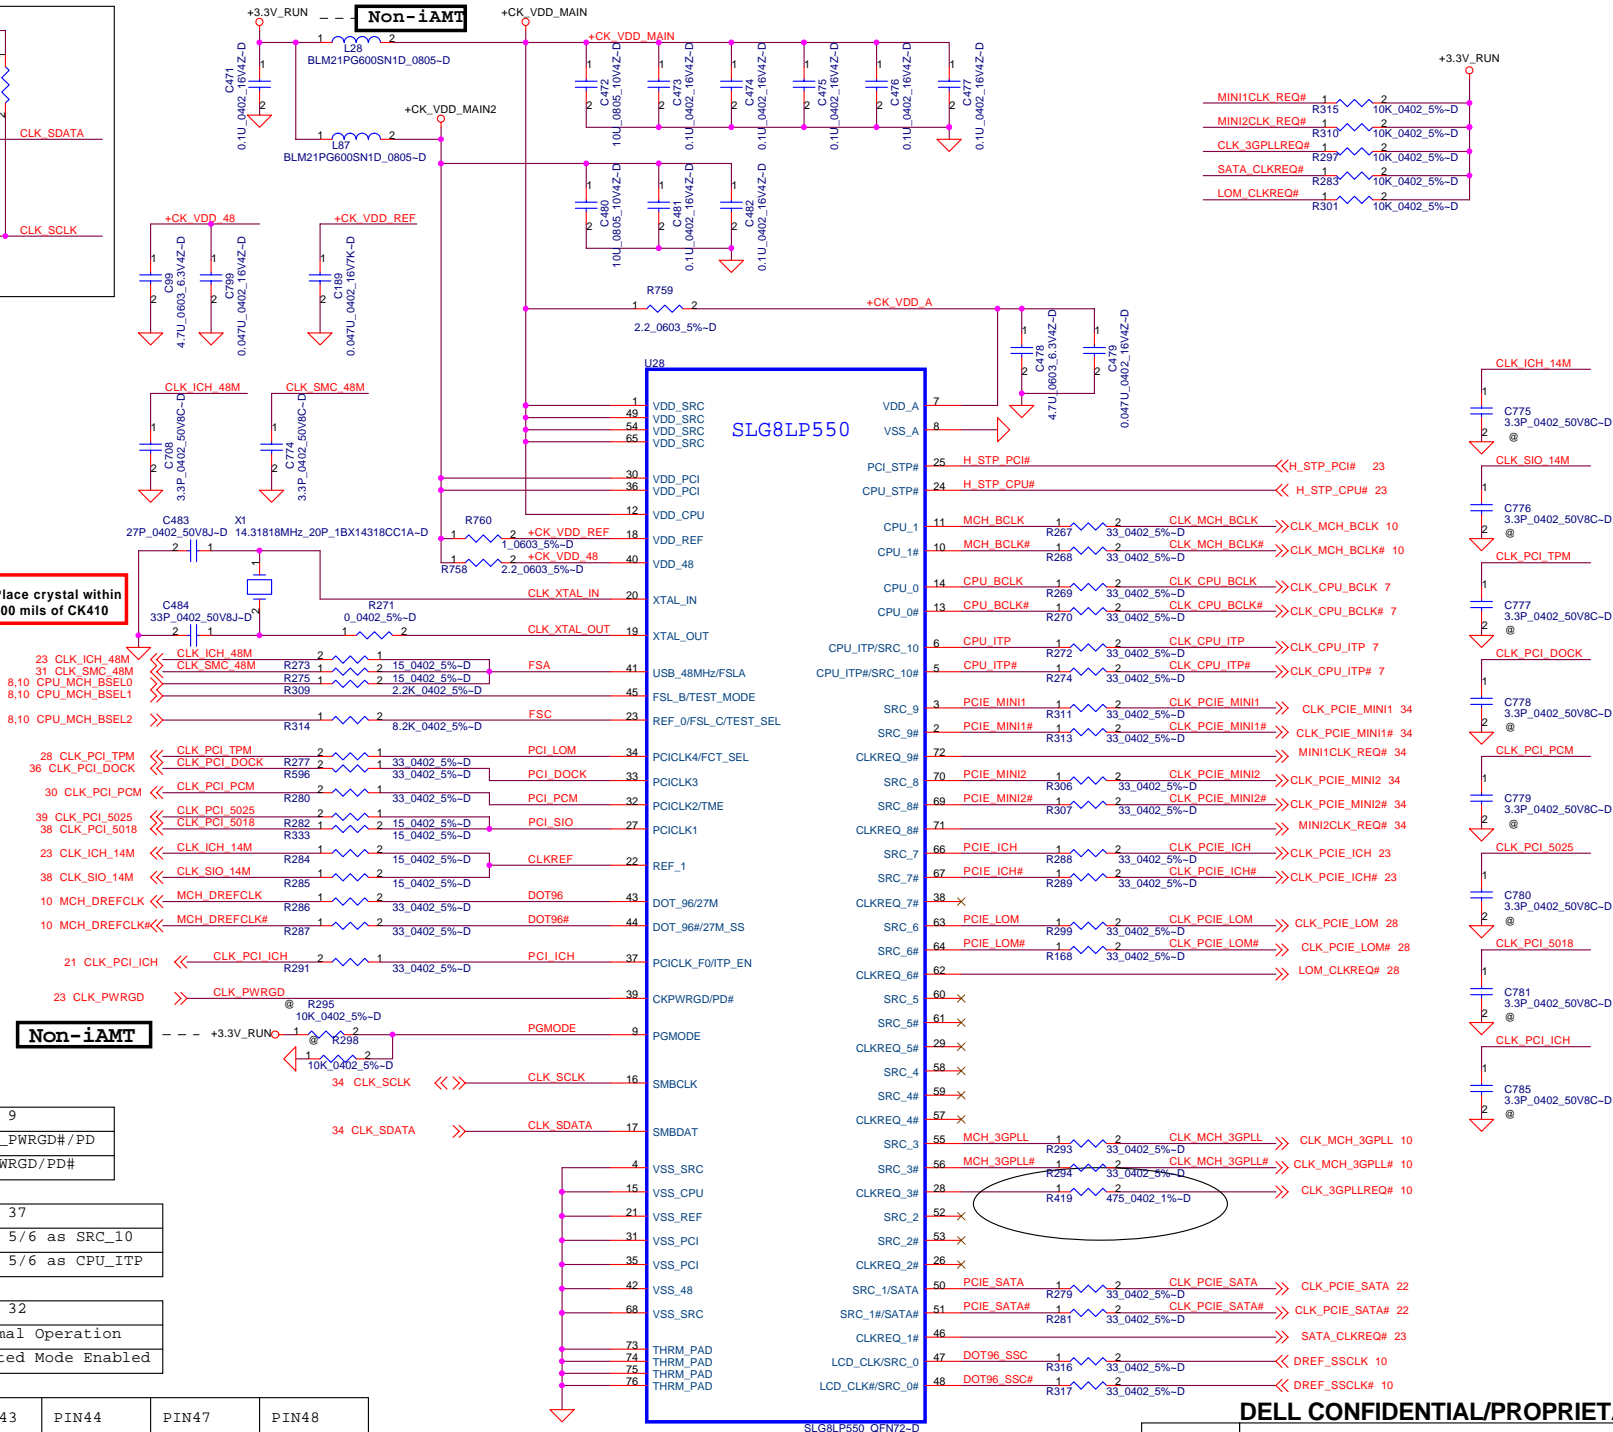



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.



Clock Generator

LA-3301P

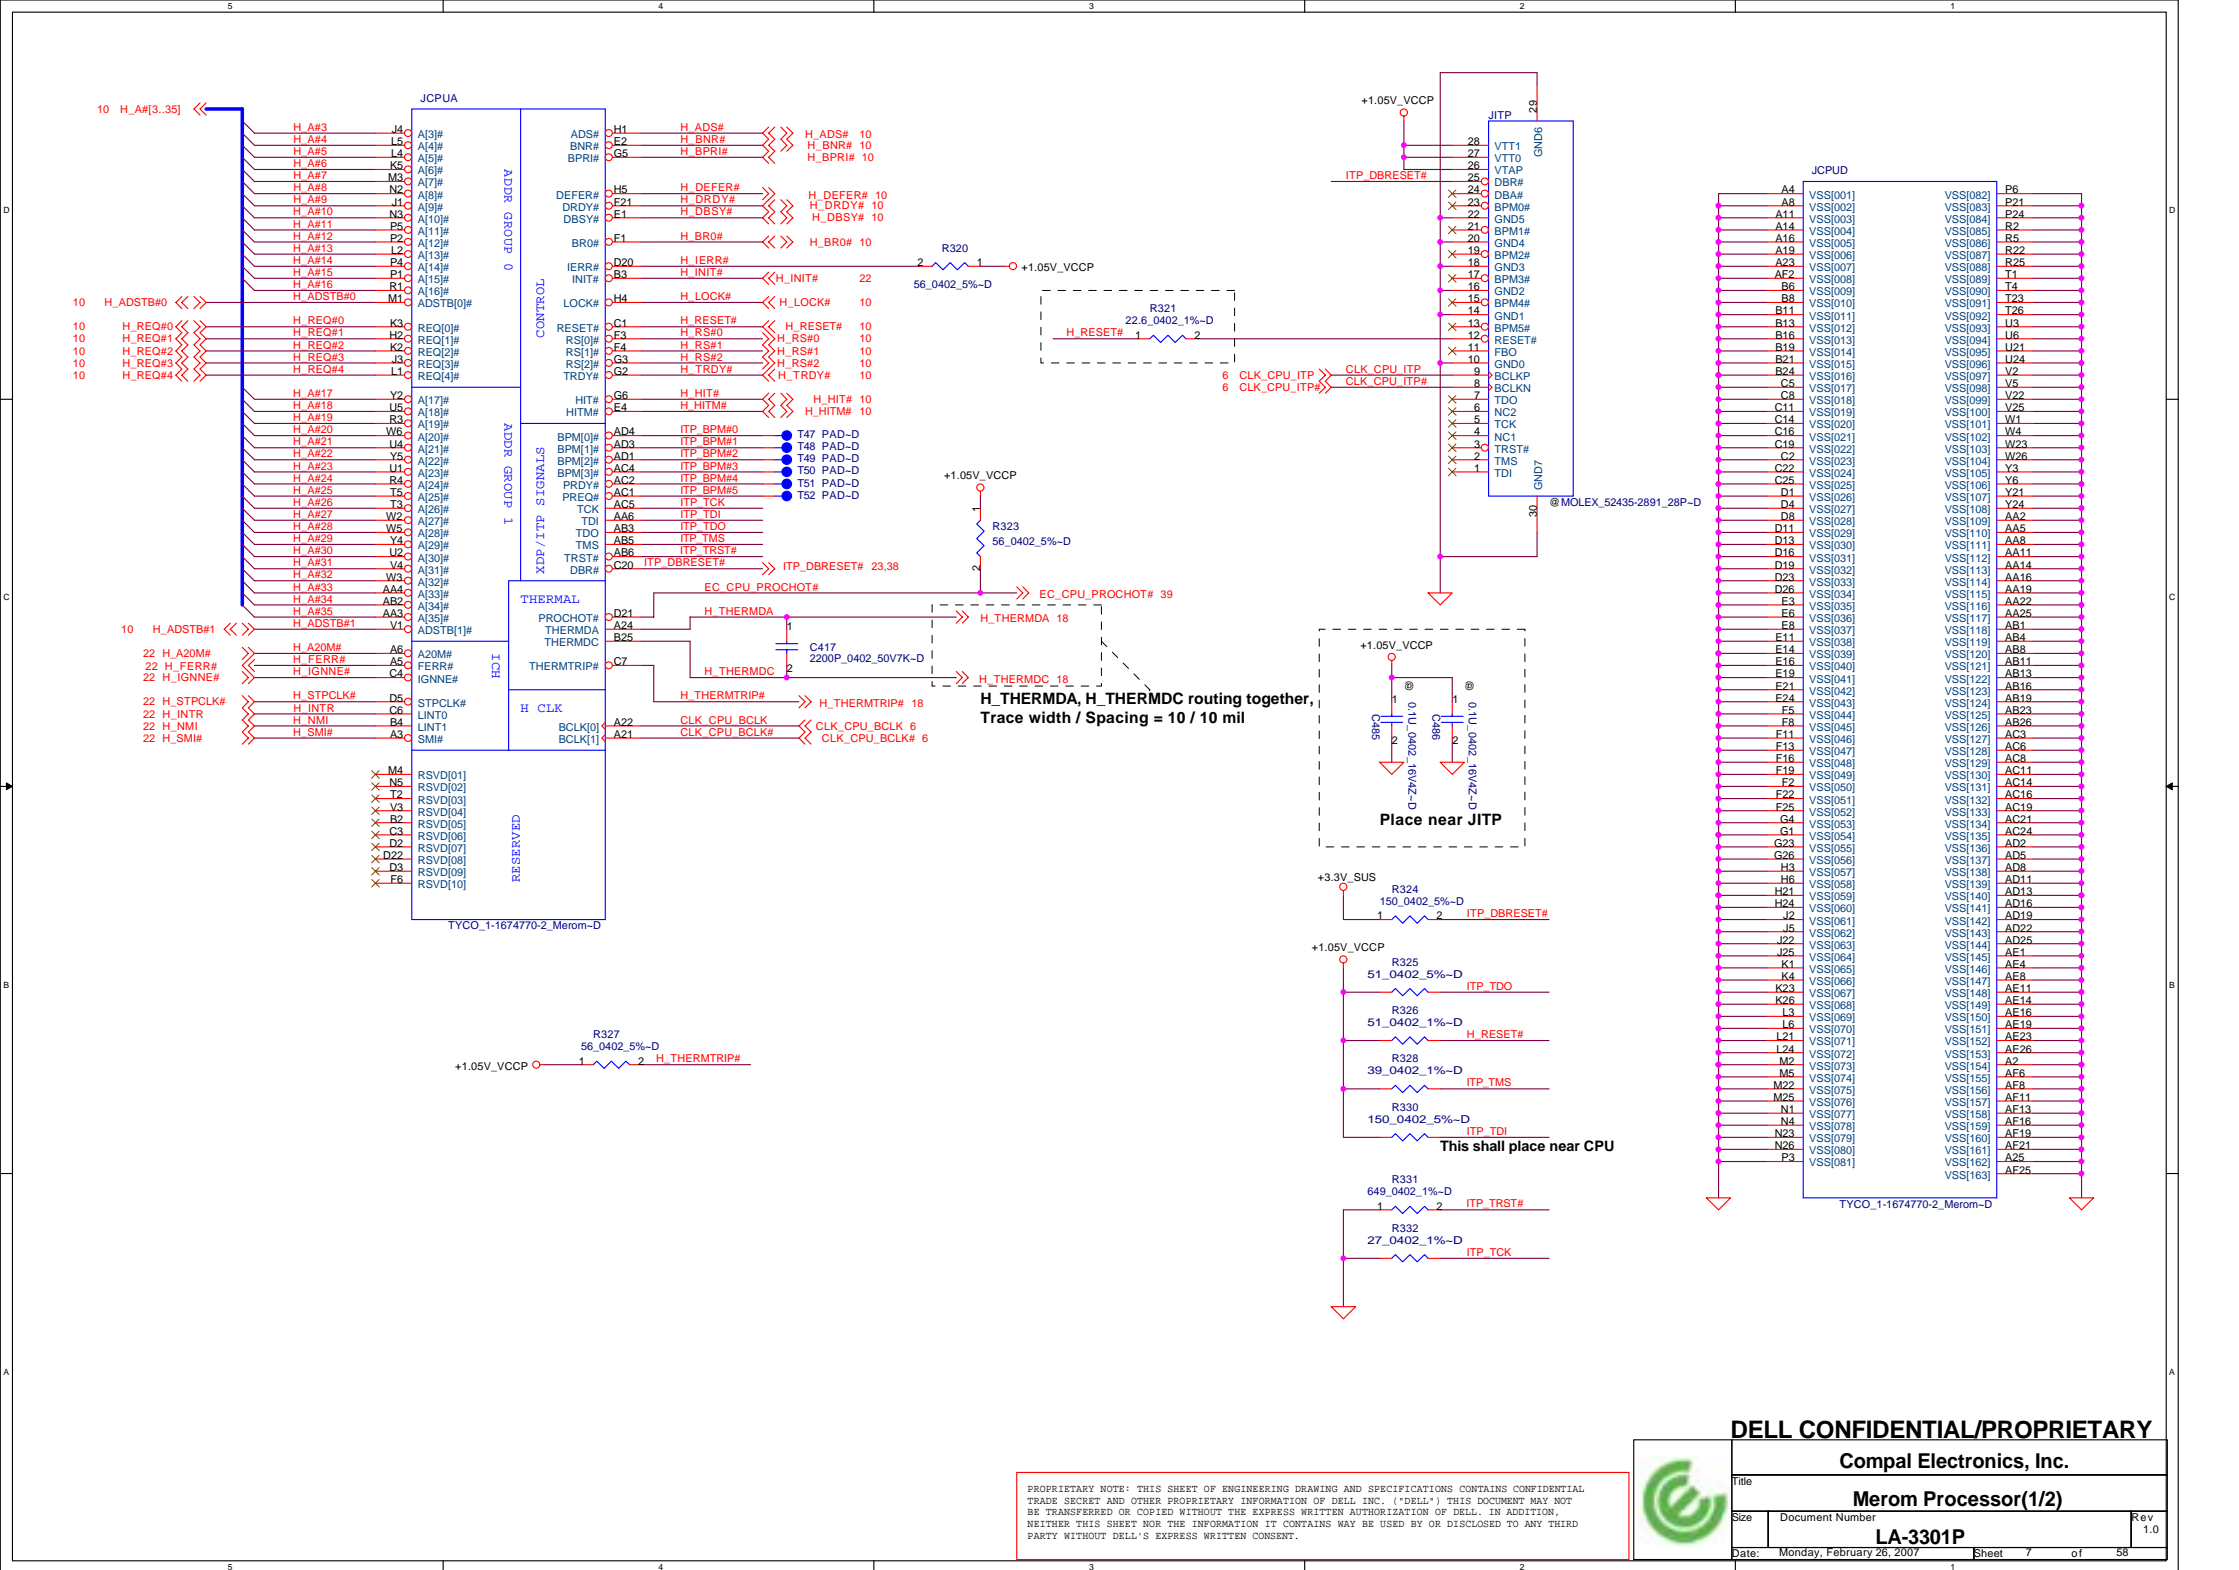

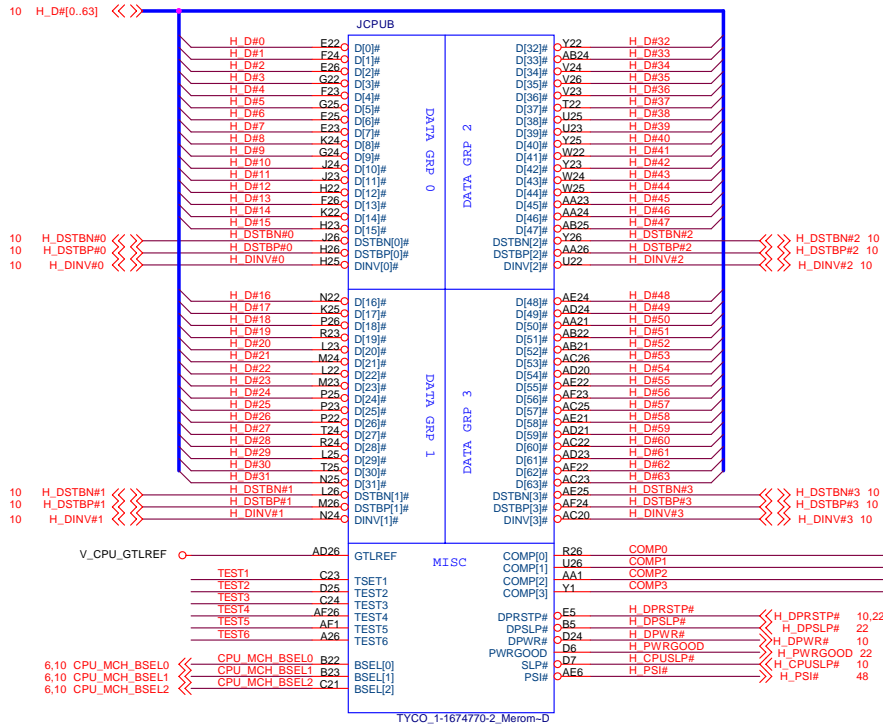


Resistor placed within 0.5" of CPU pin. Trace should be at least 25 mils away from any other toggling signal. COMP0, COMP2 trace should be 27.4 ohm. COMP1, COMP3 should be 55 ohm.

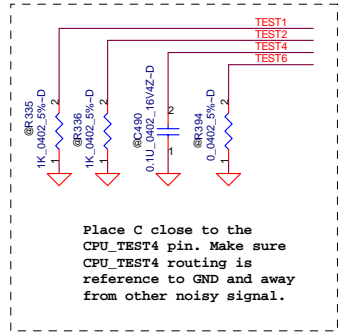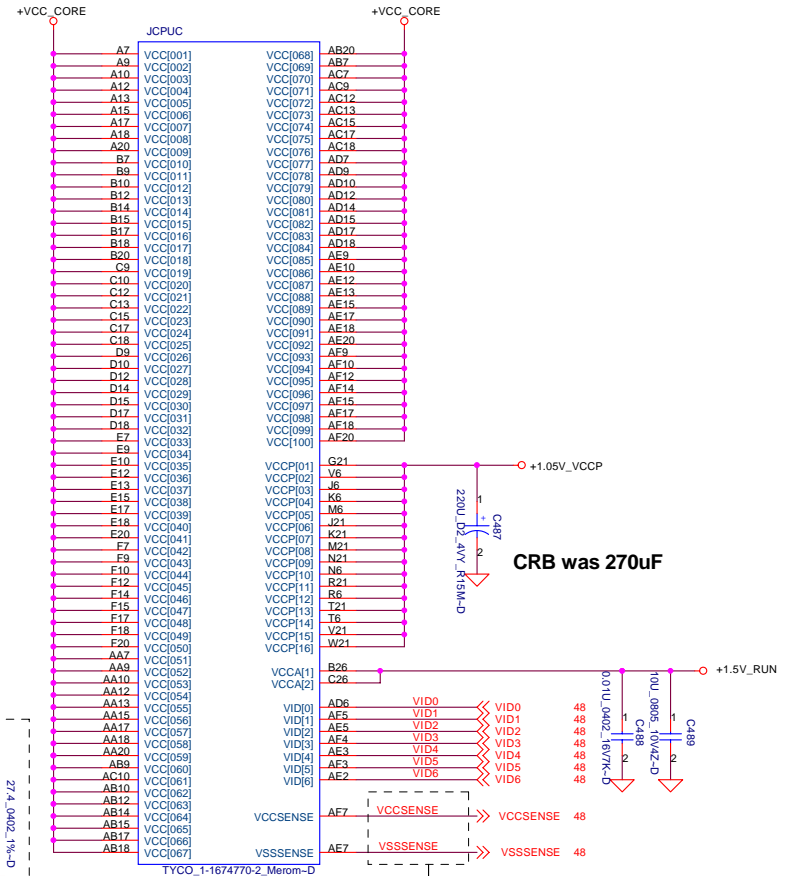

For the purpose of testability, route these signals through a ground referenced Z0 = 55ohm trace that ends in a via that is near a GND via and is accessible through an oscilloscope connection.

FSB	BCLK	BSEL2	BSEL1	BSEL0
533	133	0	0	1
667	166	0	1	1
800	200	0	1	0



PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.




DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Merom Processor(2/2)




LA-3301P


Size	Document Number	Rev
Monday, February 26, 2007	Sheet 8 of 58	1.0


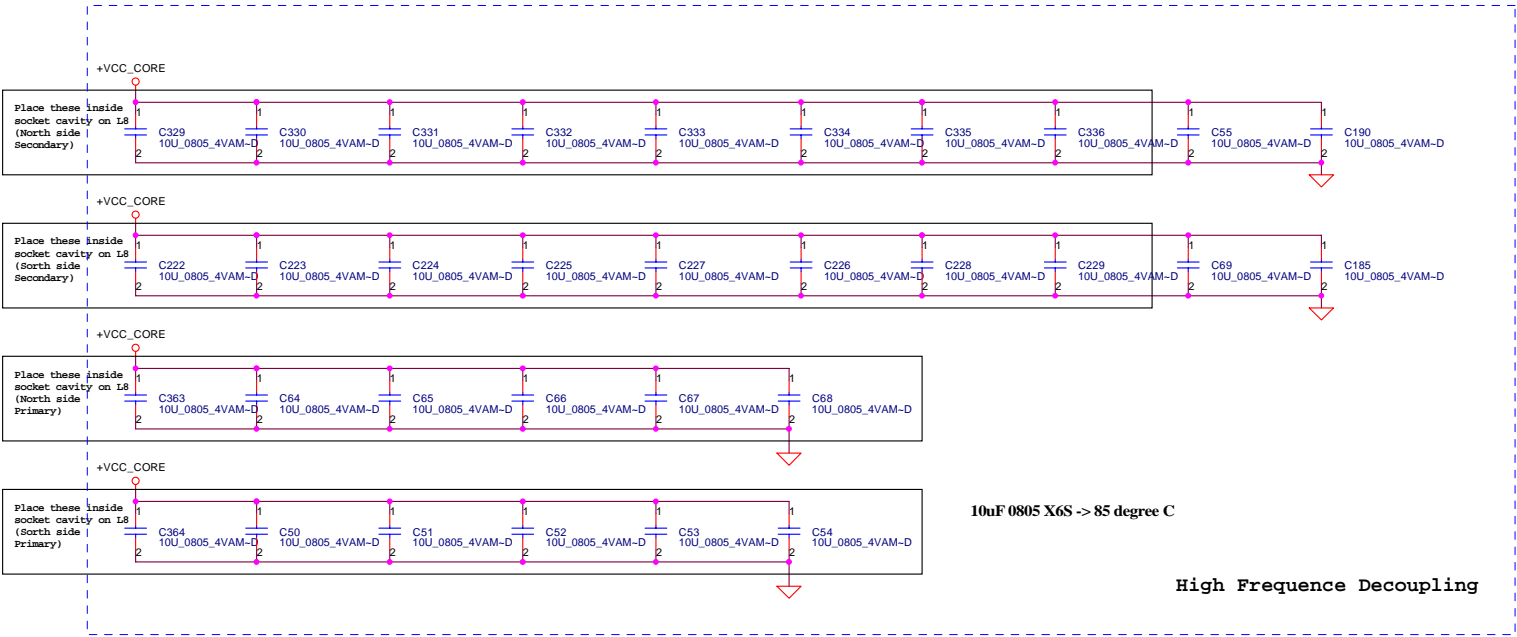


High Frequency Decoupling

Near VCORE regulator.

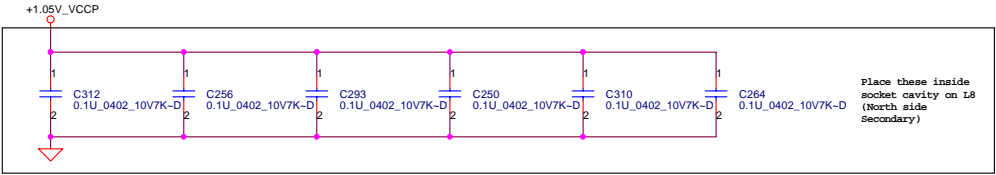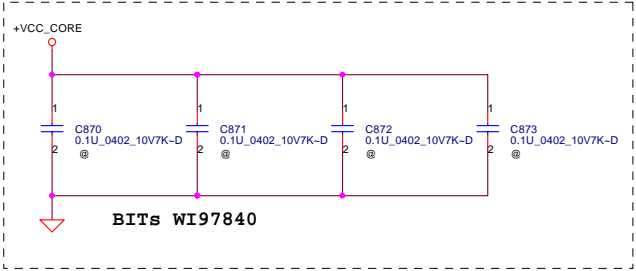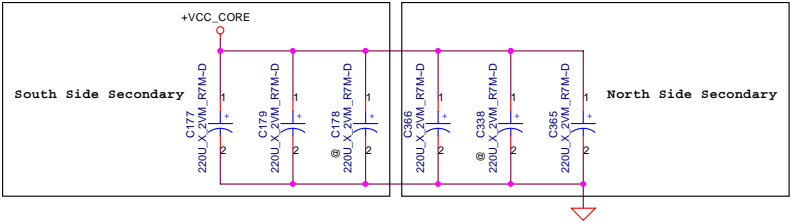

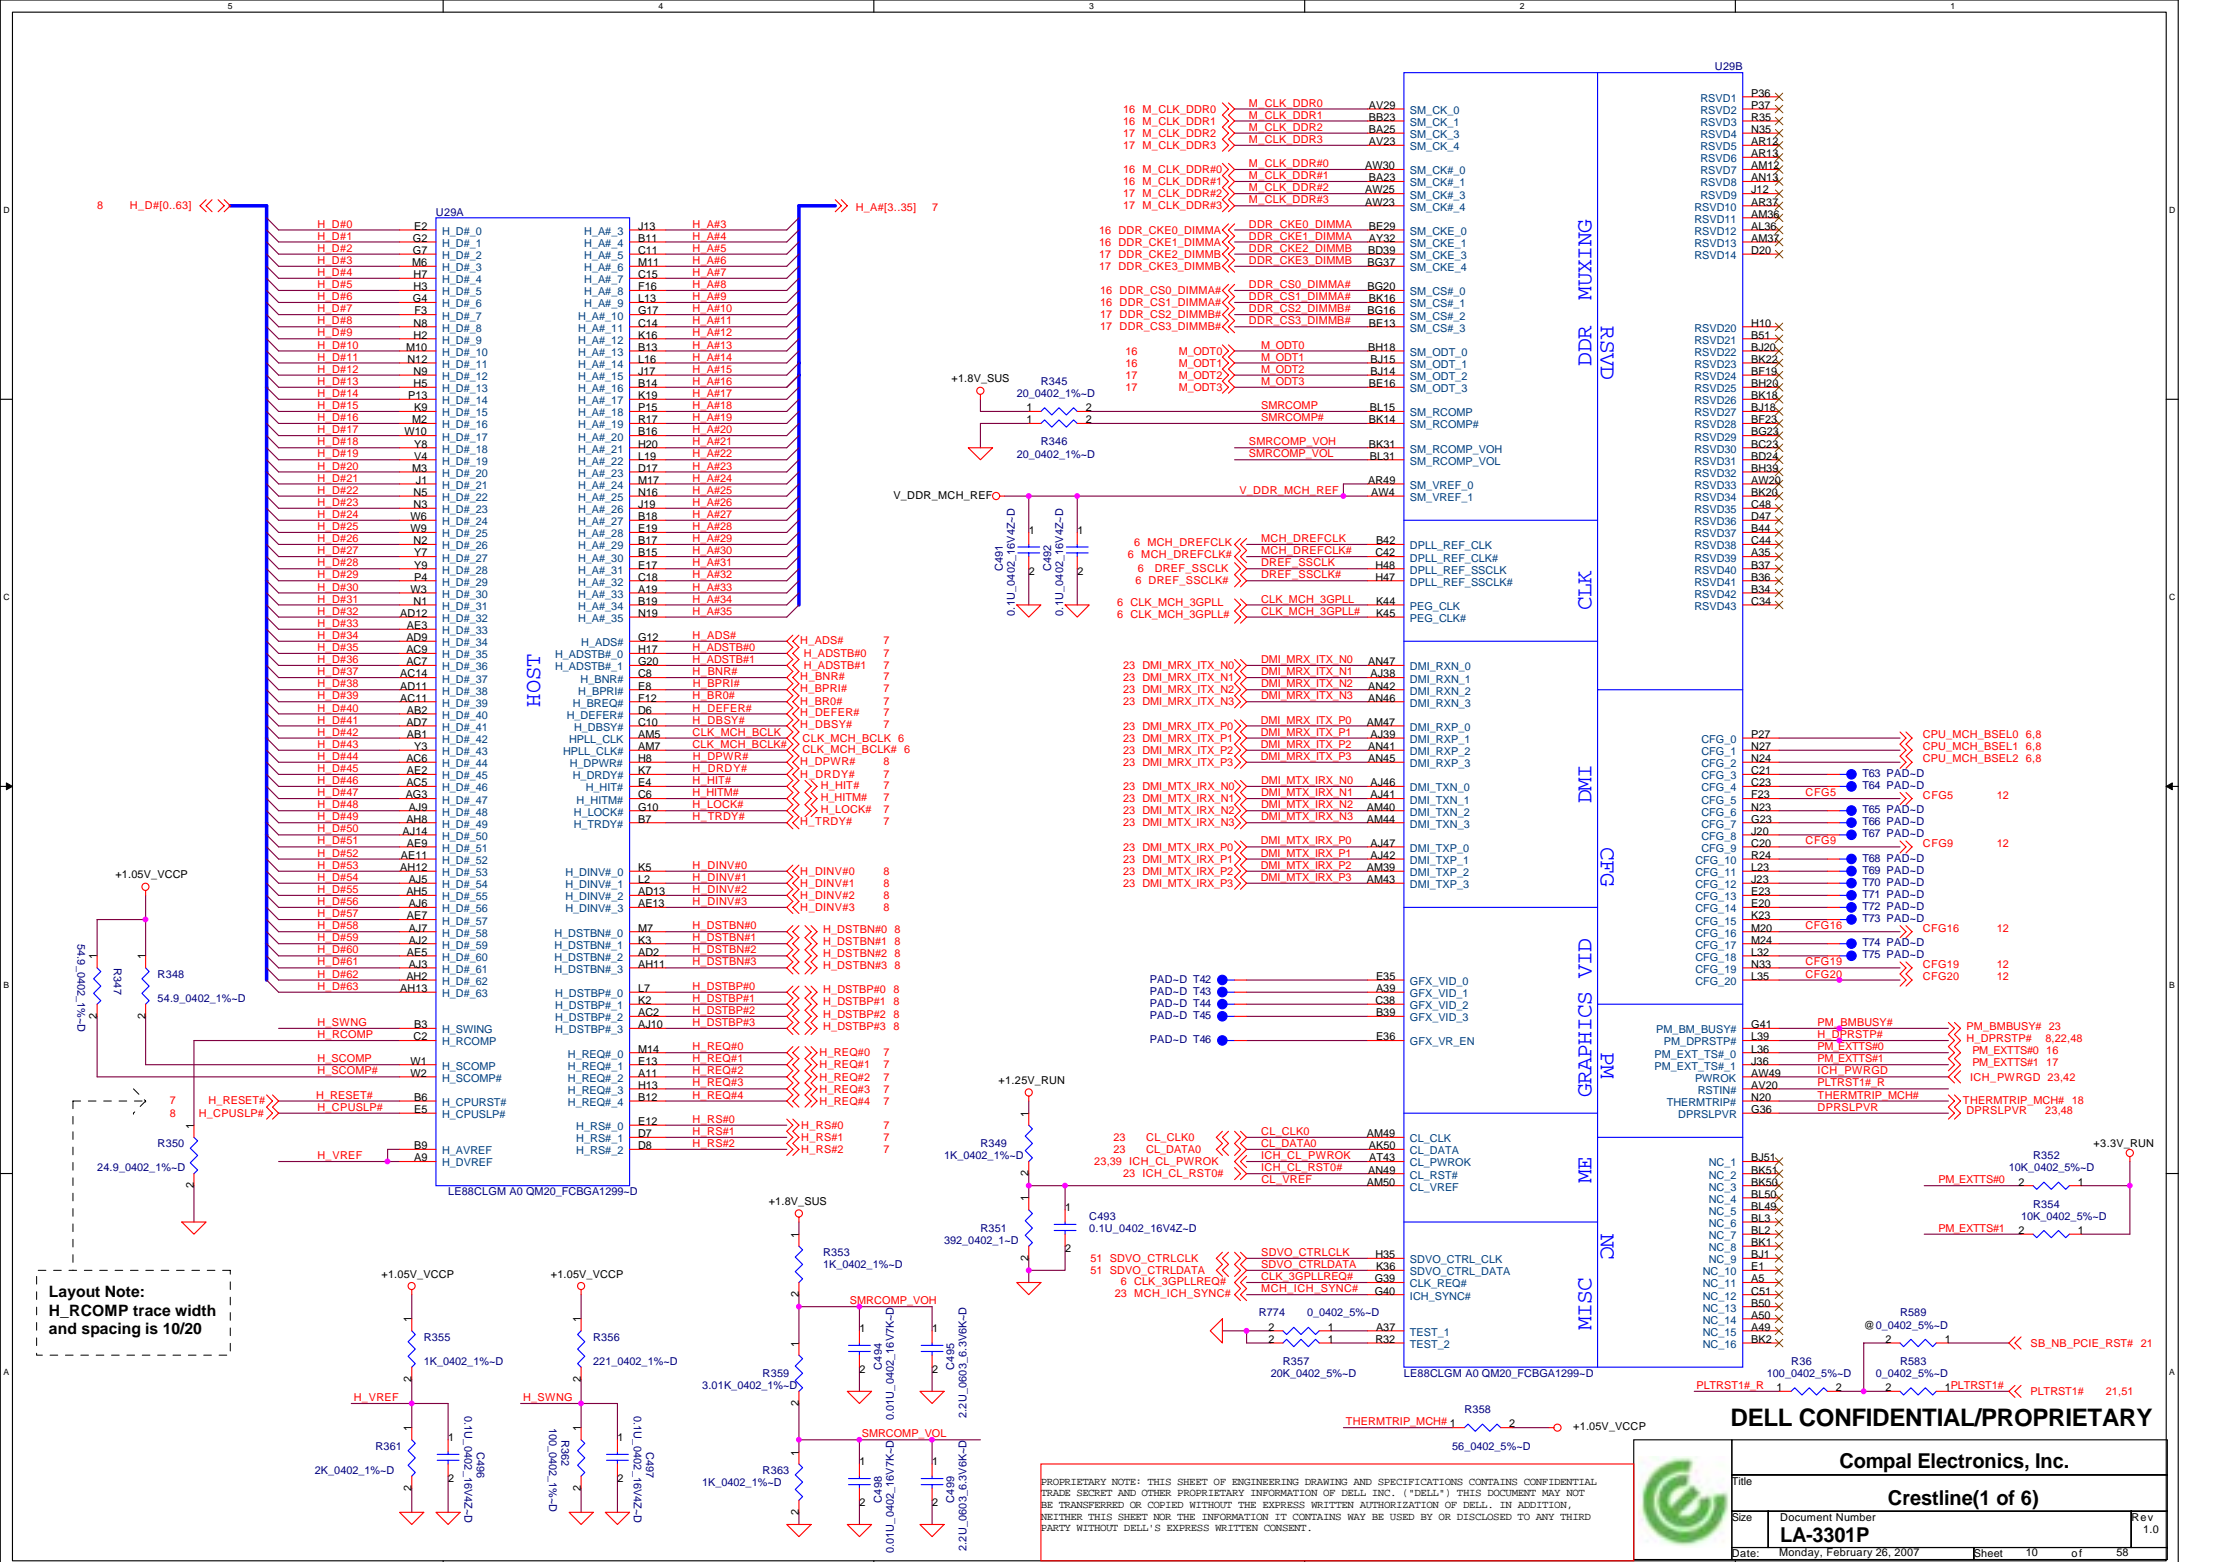

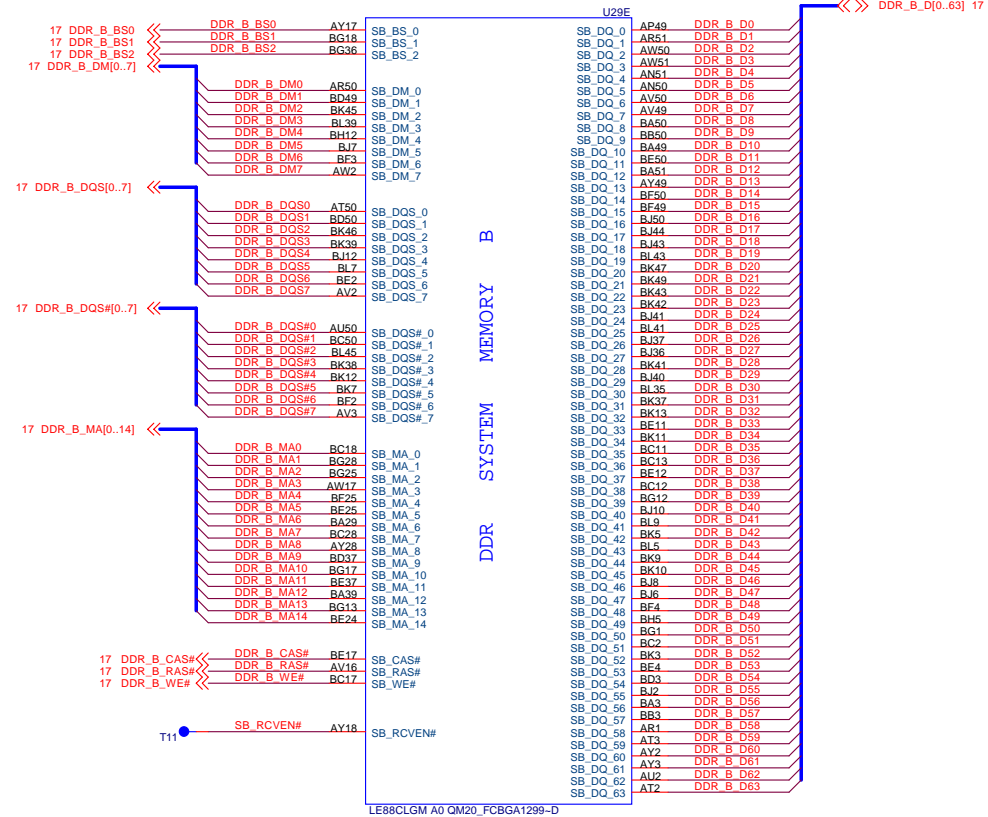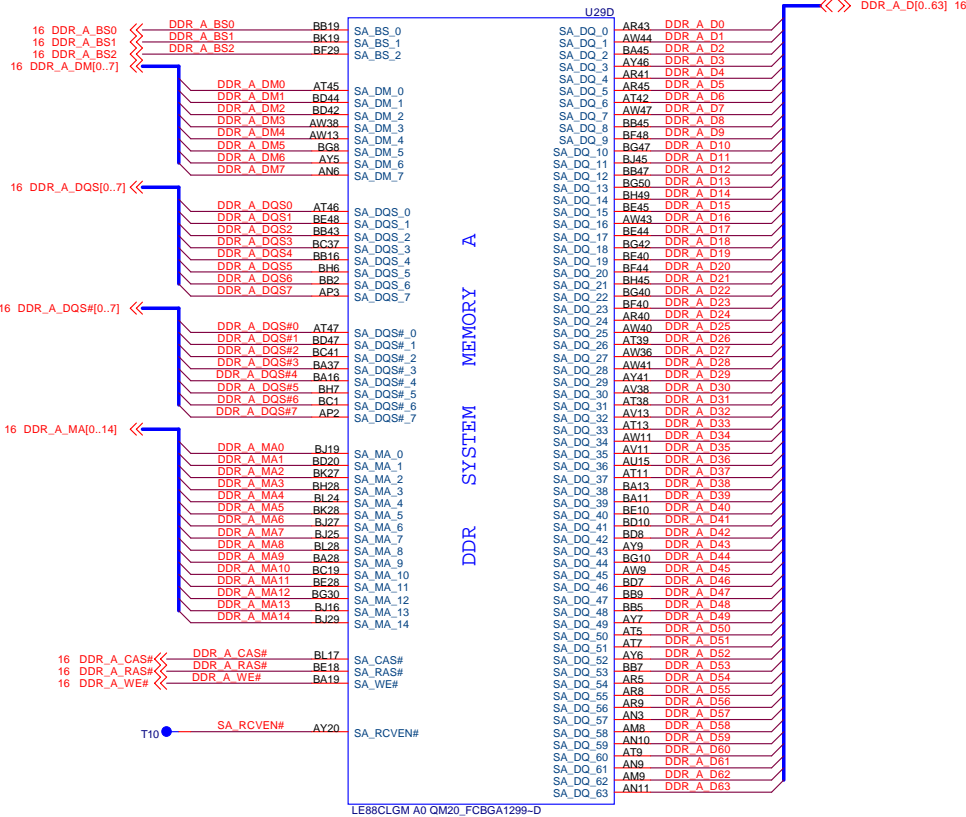

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.





DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Crestline(2 of 6)

File	Document Number	Rev
LA-3301P	1.0	
Date: Monday, February 26, 2007	Sheet 11 of 58	

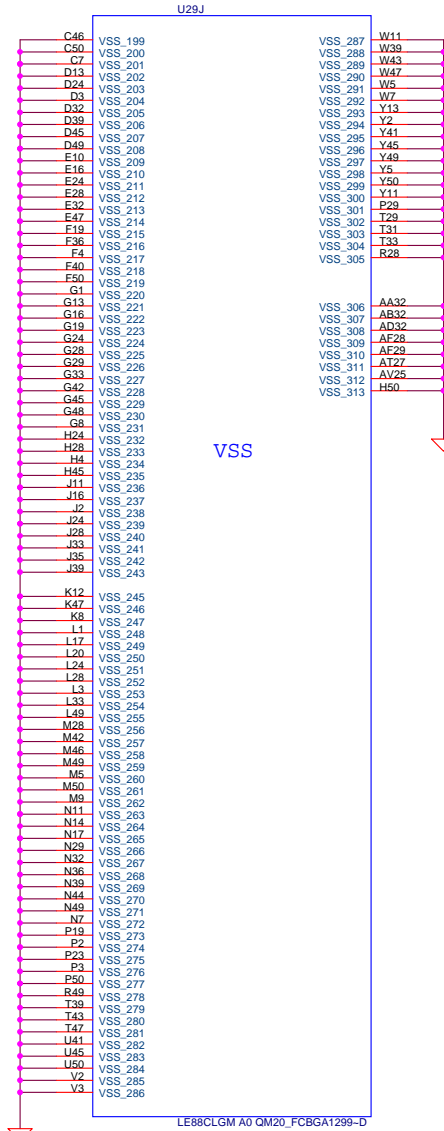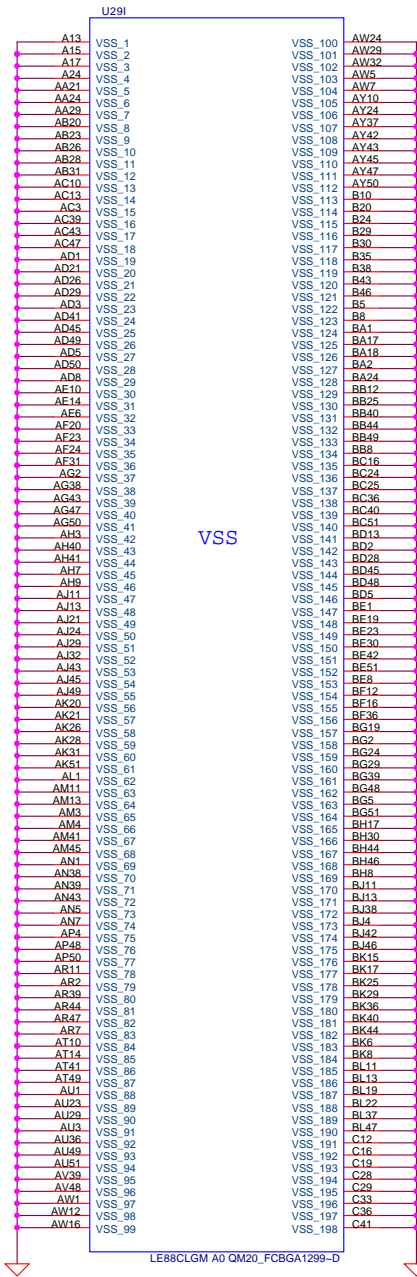





DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Crestline(6 of 6)

Title	Document Number	Rev
LA-3301P		1.0
Date: Wednesday, February 14, 2007	Sheet 15 of 58	

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ('DELL'). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.









- iAMT - - - -



Rev
1.0

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ('DELL'). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

Title			
DDRII-SODIMM SLOT1			
Size	Document Number	Rev	
	LA-3301P	1.0	
Date:	Monday, February 26, 2007	Sheet	16 of 58




1.0

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



Size	Document Number	Rev
	LA-3301P	1
Date:	Monday, February 26, 2007	Sheet 17 of 58

FAN1 Control and Tachometer

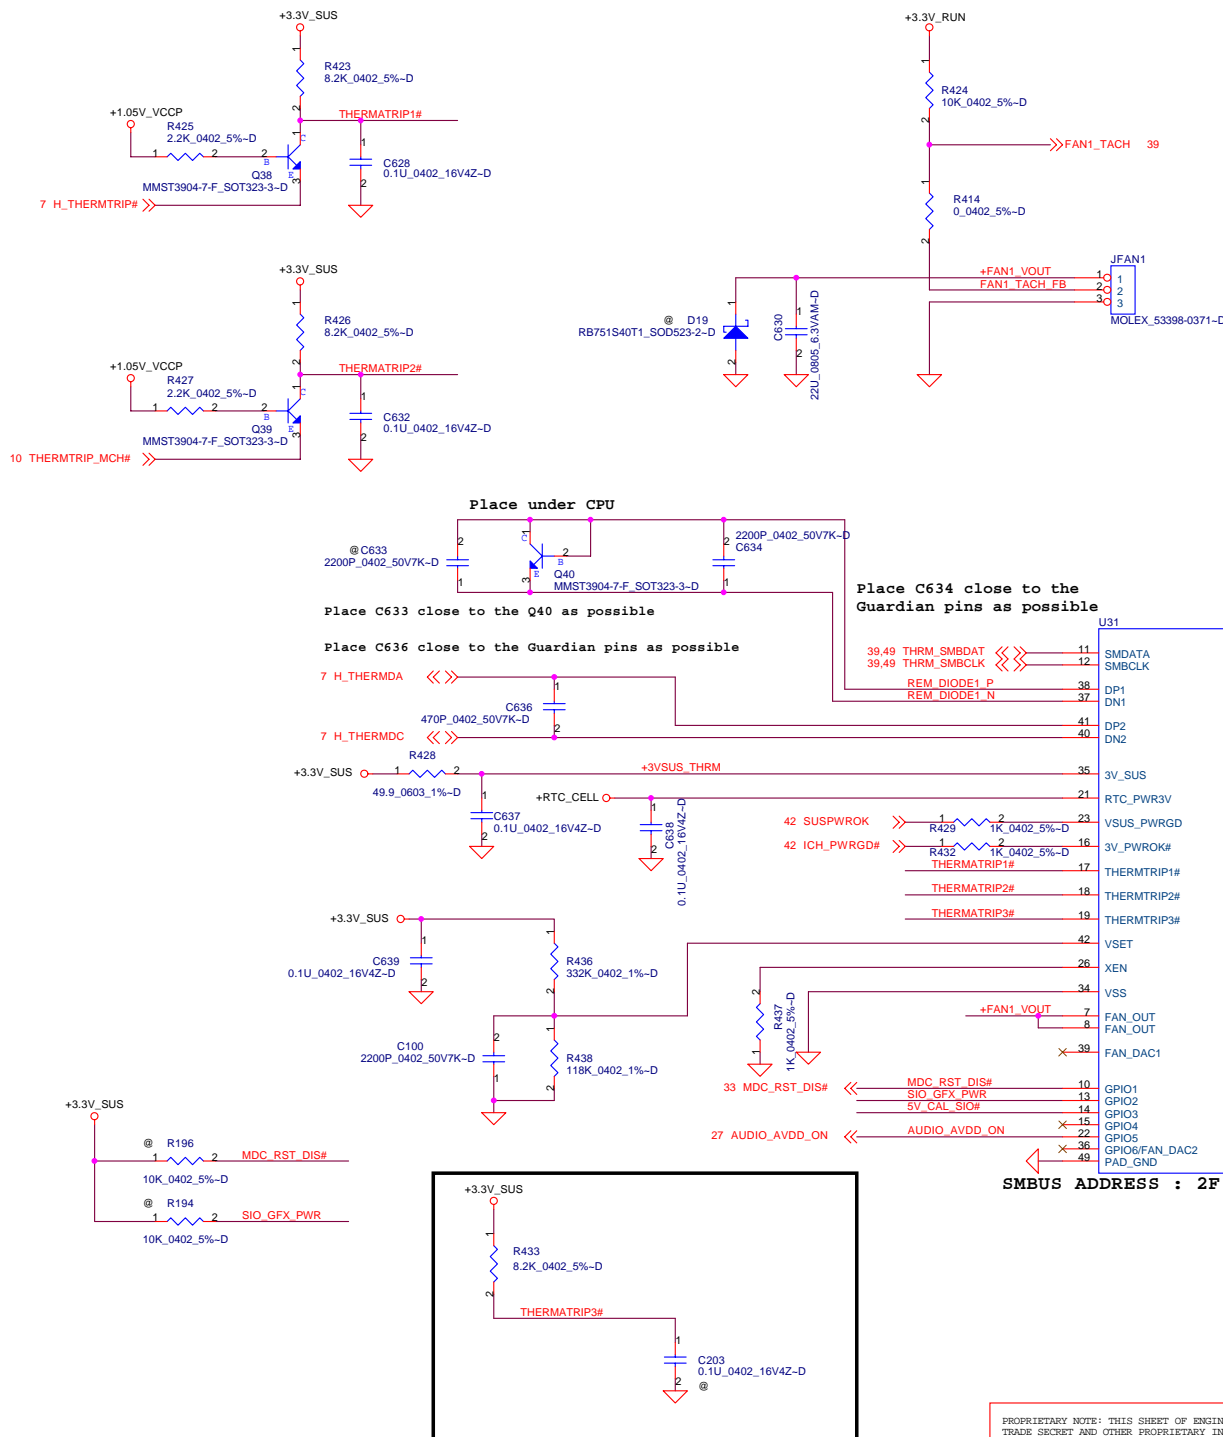


$$VSET = \frac{R438}{R436+R438} \times 3.3V = 0.865V$$

$$VSET = \left(\frac{Tp - 70}{21} \right) \Rightarrow Tp = 88.2 \text{ C}$$

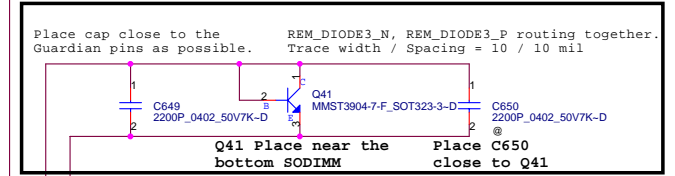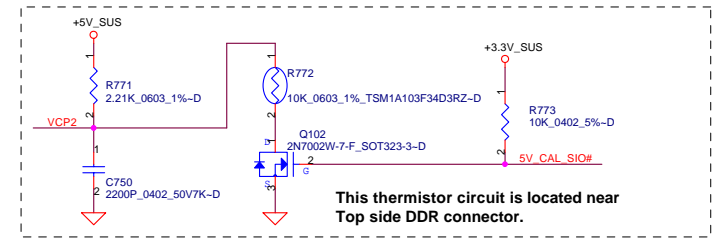

Diode circuit at DP4/DN4 is used for skin temp sensor (placed optimally between CPU, MCH and MEM).

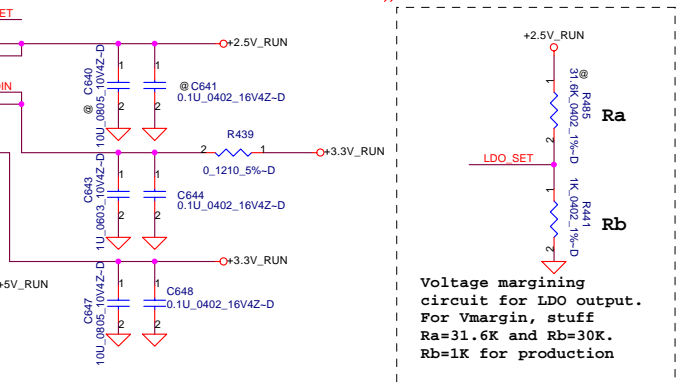

DELL CONFIDENTIAL/PROPRIETARY



Compal Electronics, Inc.

FAN & Thermal Sensor

LA-3301P

Wednesday, March 07, 2007 Sheet 18 of 58

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSMITTED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

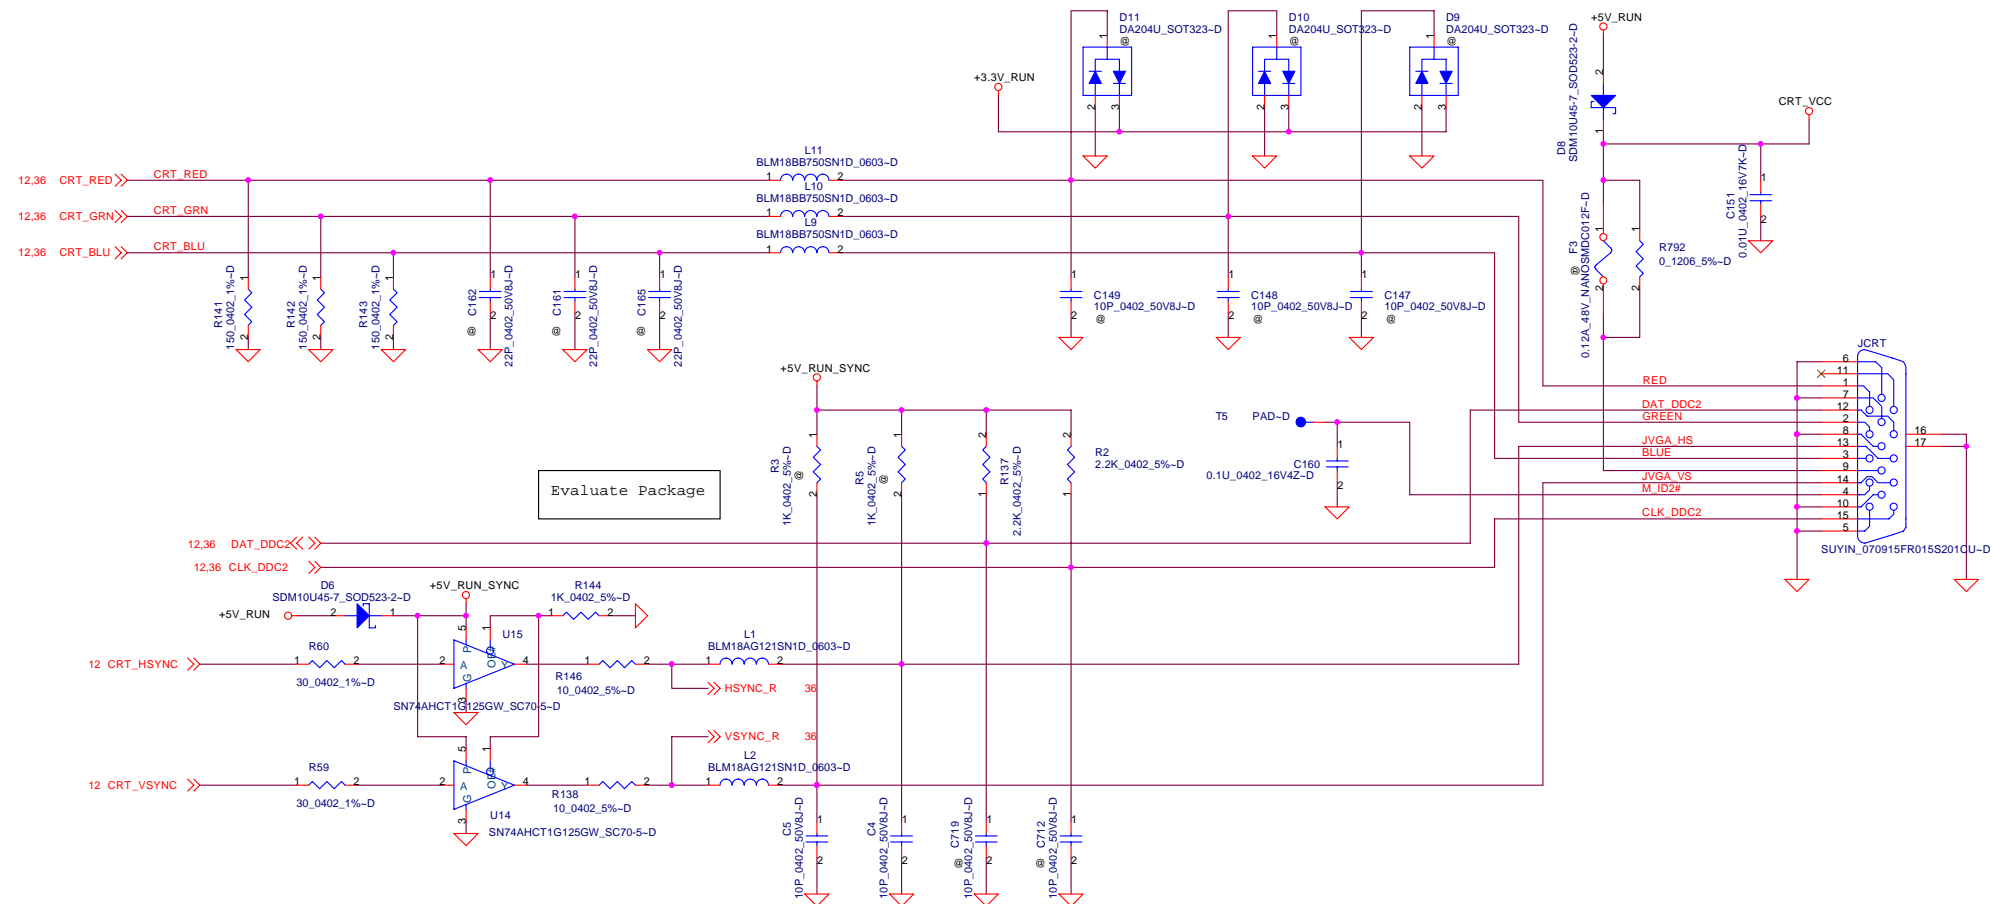



PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.






Title			
CRT			
Size	Document Number		Rev
	LA-3301P		1.0
Date:	Monday, February 26, 2007	Sheet	20 of 58

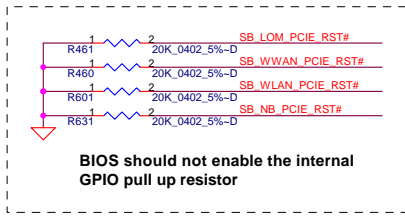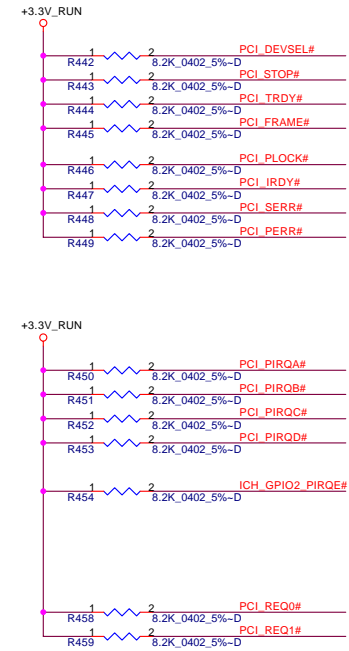

BIOS should not enable the internal GPIO pull up resistor

30,35 PCI_AD[0..31] <<>

35 PCI_PIRQA# >>> PCI_PIRQA#
 PCI_PIRQB# >>> PCI_PIRQB#
 PCI_PIROC# >>> PCI_PIROC#
 30 PCI_PIRQD# >>> PCI_PIRQD#

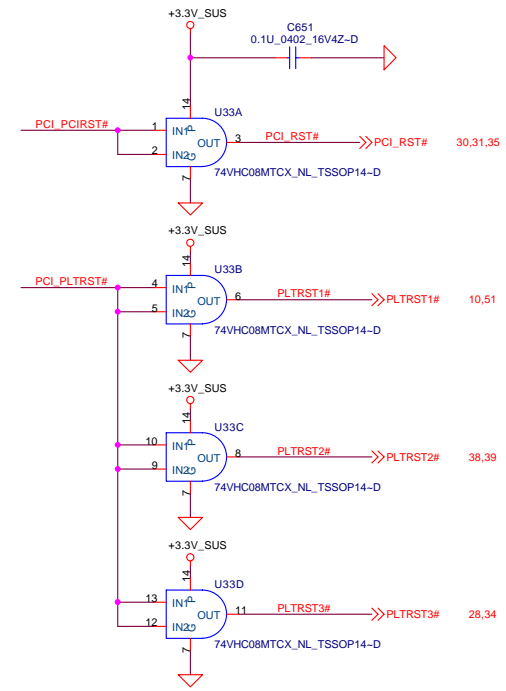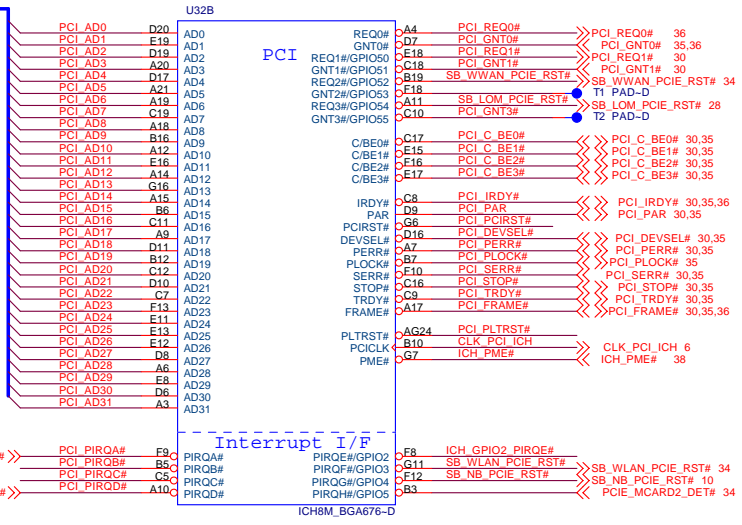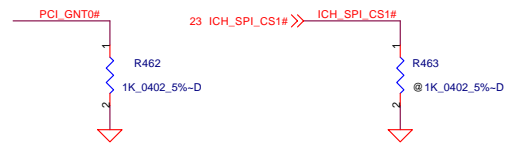

A16 away override strap.	
PCI_GNT3#	Low = A16 swap override enabled. High = Default.

Boot BIOS Strap		
PCI_GNT0#	SPI_CS1#	Boot BIOS Location
0	1	SPI
1	0	PCI
1	1	LPC

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.



Title ICH8(1/4)		
Size	Document Number LA-3301P	Rev 1.0
Date	Monday, February 26, 2007	Sheet 21 of 58

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.





Package
9.6X4.06 mm

ICH8M Internal VR Enable Strap
(Internal VR for VccSus1.05, VccSus1.5, VccCL1.5)


ICH_INTVRMEN	Low = Internal VR Disabled
	High = Internal VR Enabled(Default)

ICH8M LAN100 SLP Strap
(Internal VR for VccLAN1.05 and VccCL1.05)

ICH_LAN100_SLP	Low = Internal VR Disabled
	High = Internal VR Enabled(Default)

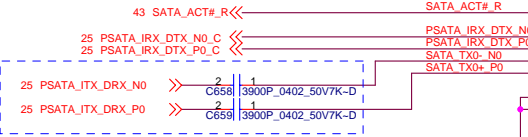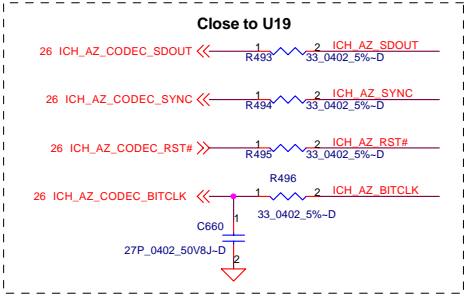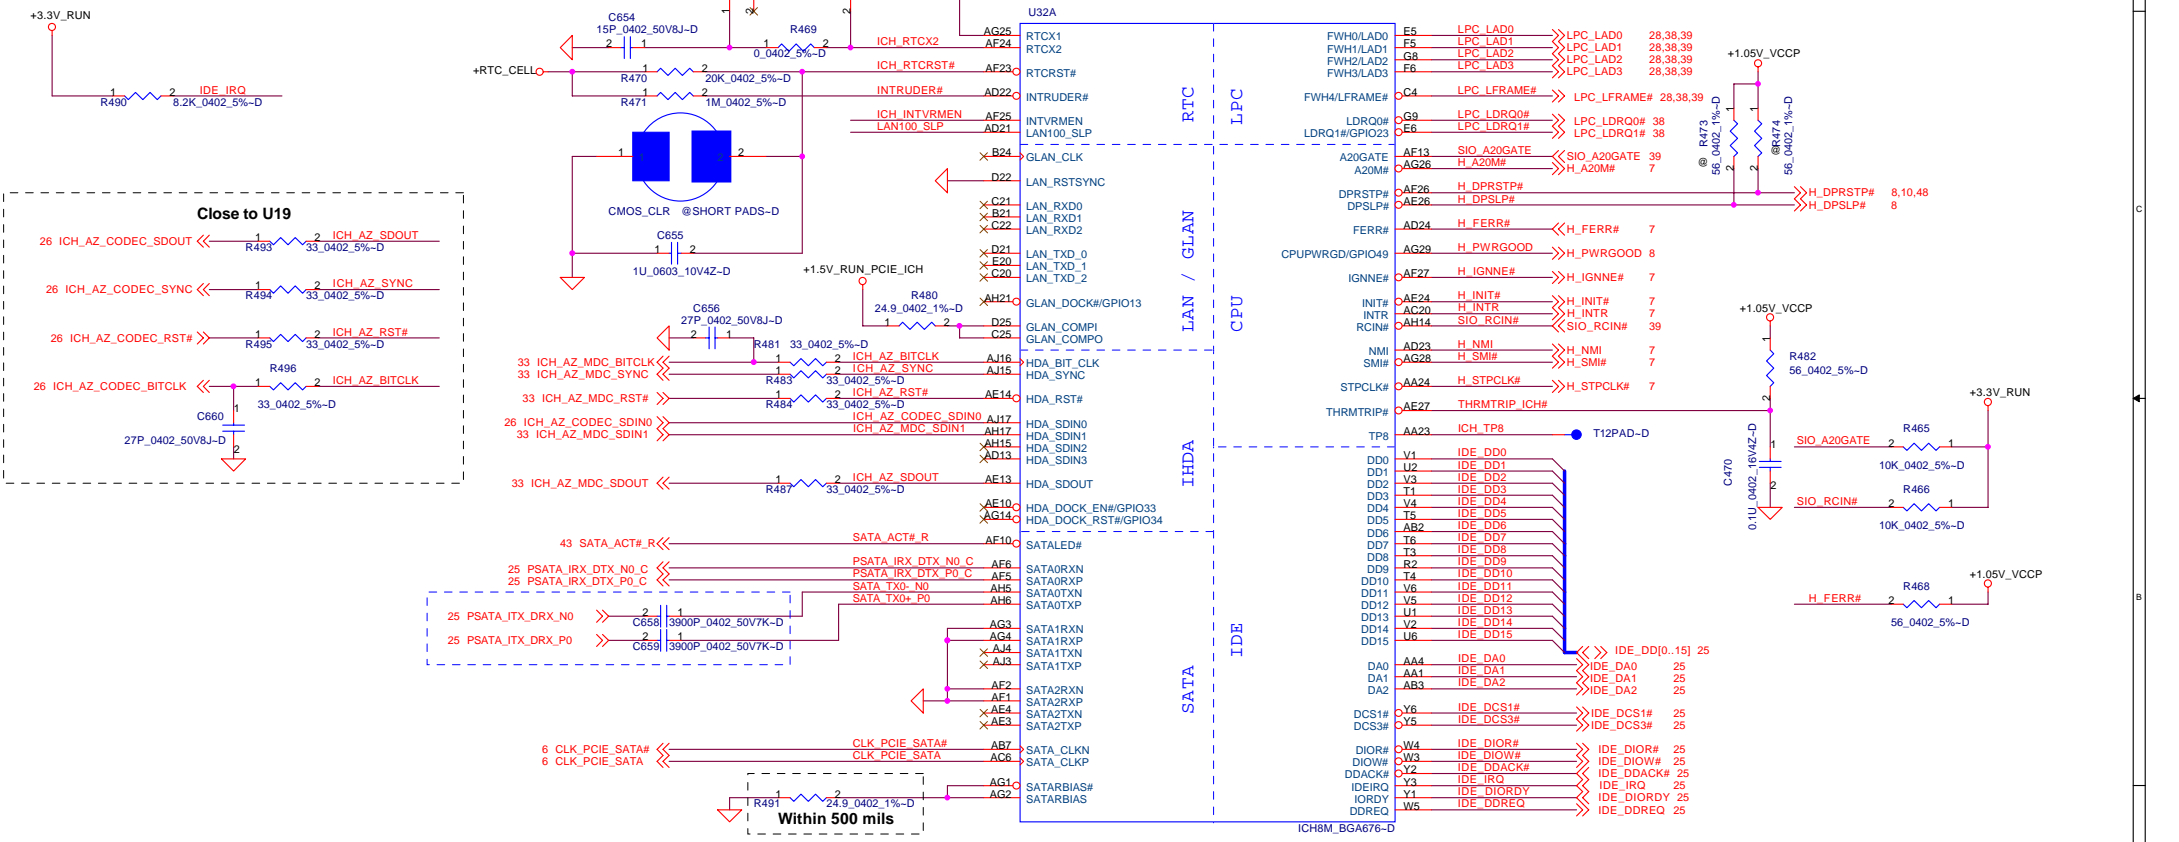

XOR Chain Entrance Strap		
ICH_RSVD	HDA_SDOUT	Description
0	0	RSVD
0	1	Enter XOR Chain
1	0	Normal Operation (Default)
1	1	Set PCIE port config bit 1

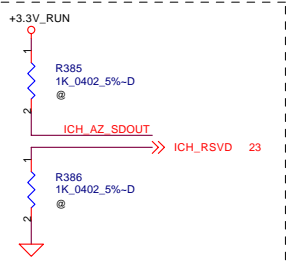

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY



Compal Electronics, Inc.

ICH8(2/4)

Document Number
LA-3301P

Monday, February 26, 2007 Sheet 22 of 58



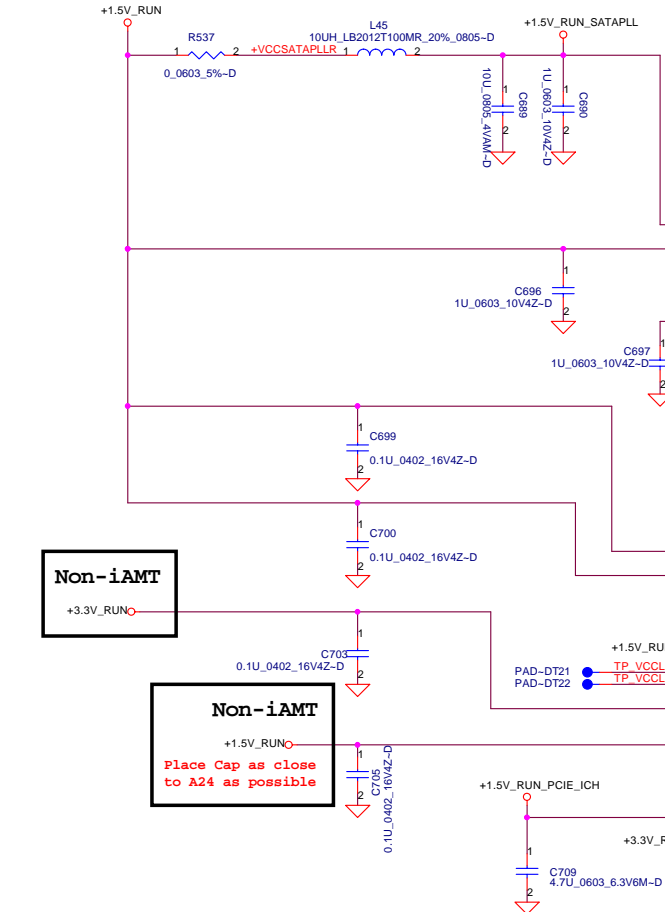

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSMITTED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY






Compal Electronics, Inc.

ICH8(4/4)

LA-3301P

Wednesday, February 14, 2007 Sheet 24 of 58

A23	VSS[001]	VSS[099]	K7
A24	VSS[002]	VSS[100]	L1
A25	VSS[003]	VSS[101]	L13
A26	VSS[004]	VSS[102]	L15
A27	VSS[005]	VSS[103]	L26
A28	VSS[006]	VSS[104]	L27
A29	VSS[007]	VSS[105]	L4
A30	VSS[008]	VSS[106]	L5
A31	VSS[009]	VSS[107]	L12
A32	VSS[010]	VSS[108]	L14
A33	VSS[011]	VSS[109]	L15
A34	VSS[012]	VSS[110]	L16
A35	VSS[013]	VSS[111]	L17
A36	VSS[014]	VSS[112]	L18
A37	VSS[015]	VSS[113]	L19
A38	VSS[016]	VSS[114]	L20
A39	VSS[017]	VSS[115]	L21
A40	VSS[018]	VSS[116]	L22
A41	VSS[019]	VSS[117]	L23
A42	VSS[020]	VSS[118]	L24
A43	VSS[021]	VSS[119]	L25
A44	VSS[022]	VSS[120]	L26
A45	VSS[023]	VSS[121]	L27
A46	VSS[024]	VSS[122]	L28
A47	VSS[025]	VSS[123]	L29
A48	VSS[026]	VSS[124]	L30
A49	VSS[027]	VSS[125]	L31
A50	VSS[028]	VSS[126]	L32
A51	VSS[029]	VSS[127]	L33
A52	VSS[030]	VSS[128]	L34
A53	VSS[031]	VSS[129]	L35
A54	VSS[032]	VSS[130]	L36
A55	VSS[033]	VSS[131]	L37
A56	VSS[034]	VSS[132]	L38
A57	VSS[035]	VSS[133]	L39
A58	VSS[036]	VSS[134]	L40
A59	VSS[037]	VSS[135]	L41
A60	VSS[038]	VSS[136]	L42
A61	VSS[039]	VSS[137]	L43
A62	VSS[040]	VSS[138]	L44
A63	VSS[041]	VSS[139]	L45
A64	VSS[042]	VSS[140]	L46
A65	VSS[043]	VSS[141]	L47
A66	VSS[044]	VSS[142]	L48
A67	VSS[045]	VSS[143]	L49
A68	VSS[046]	VSS[144]	L50
A69	VSS[047]	VSS[145]	L51
A70	VSS[048]	VSS[146]	L52
A71	VSS[049]	VSS[147]	L53
A72	VSS[050]	VSS[148]	L54
A73	VSS[051]	VSS[149]	L55
A74	VSS[052]	VSS[150]	L56
A75	VSS[053]	VSS[151]	L57
A76	VSS[054]	VSS[152]	L58
A77	VSS[055]	VSS[153]	L59
A78	VSS[056]	VSS[154]	L60
A79	VSS[057]	VSS[155]	L61
A80	VSS[058]	VSS[156]	L62
A81	VSS[059]	VSS[157]	L63
A82	VSS[060]	VSS[158]	L64
A83	VSS[061]	VSS[159]	L65
A84	VSS[062]	VSS[160]	L66
A85	VSS[063]	VSS[161]	L67
A86	VSS[064]	VSS[162]	L68
A87	VSS[065]	VSS[163]	L69
A88	VSS[066]	VSS[164]	L70
A89	VSS[067]	VSS[165]	L71
A90	VSS[068]	VSS[166]	L72
A91	VSS[069]	VSS[167]	L73
A92	VSS[070]	VSS[168]	L74
A93	VSS[071]	VSS[169]	L75
A94	VSS[072]	VSS[170]	L76
A95	VSS[073]	VSS[171]	L77
A96	VSS[074]	VSS[172]	L78
A97	VSS[075]	VSS[173]	L79
A98	VSS[076]	VSS[174]	L80
A99	VSS[077]	VSS[175]	L81
A100	VSS[078]	VSS[176]	L82
A101	VSS[079]	VSS[177]	L83
A102	VSS[080]	VSS[178]	L84
A103	VSS[081]	VSS[179]	L85
A104	VSS[082]	VSS[180]	L86
A105	VSS[083]	VSS[181]	L87
A106	VSS[084]	VSS[182]	L88
A107	VSS[085]	VSS[183]	L89
A108	VSS[086]	VSS[184]	L90
A109	VSS[087]	VSS[185]	L91
A110	VSS[088]	VSS[186]	L92
A111	VSS[089]	VSS[187]	L93
A112	VSS[090]	VSS[188]	L94
A113	VSS[091]	VSS[189]	L95
A114	VSS[092]	VSS[190]	L96
A115	VSS[093]	VSS[191]	L97
A116	VSS[094]	VSS[192]	L98
A117	VSS[095]	VSS[193]	L99
A118	VSS[096]	VSS[194]	L100
A119	VSS[097]	VSS[195]	L101
A120	VSS[098]	VSS[196]	L102

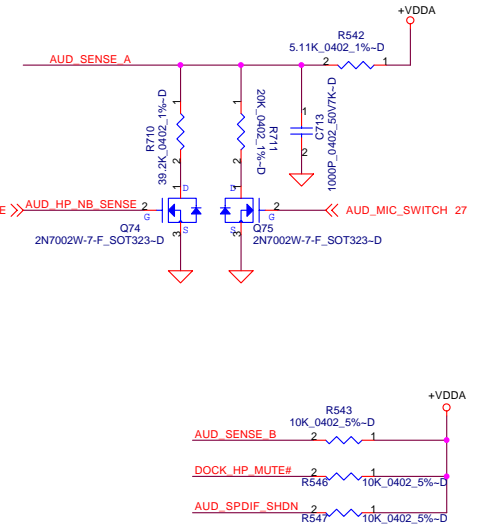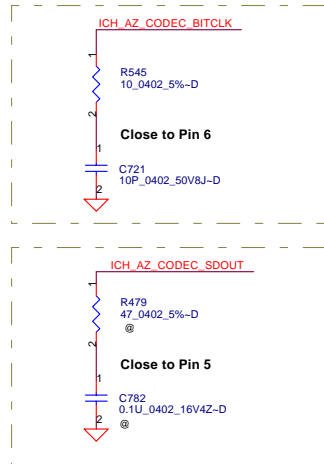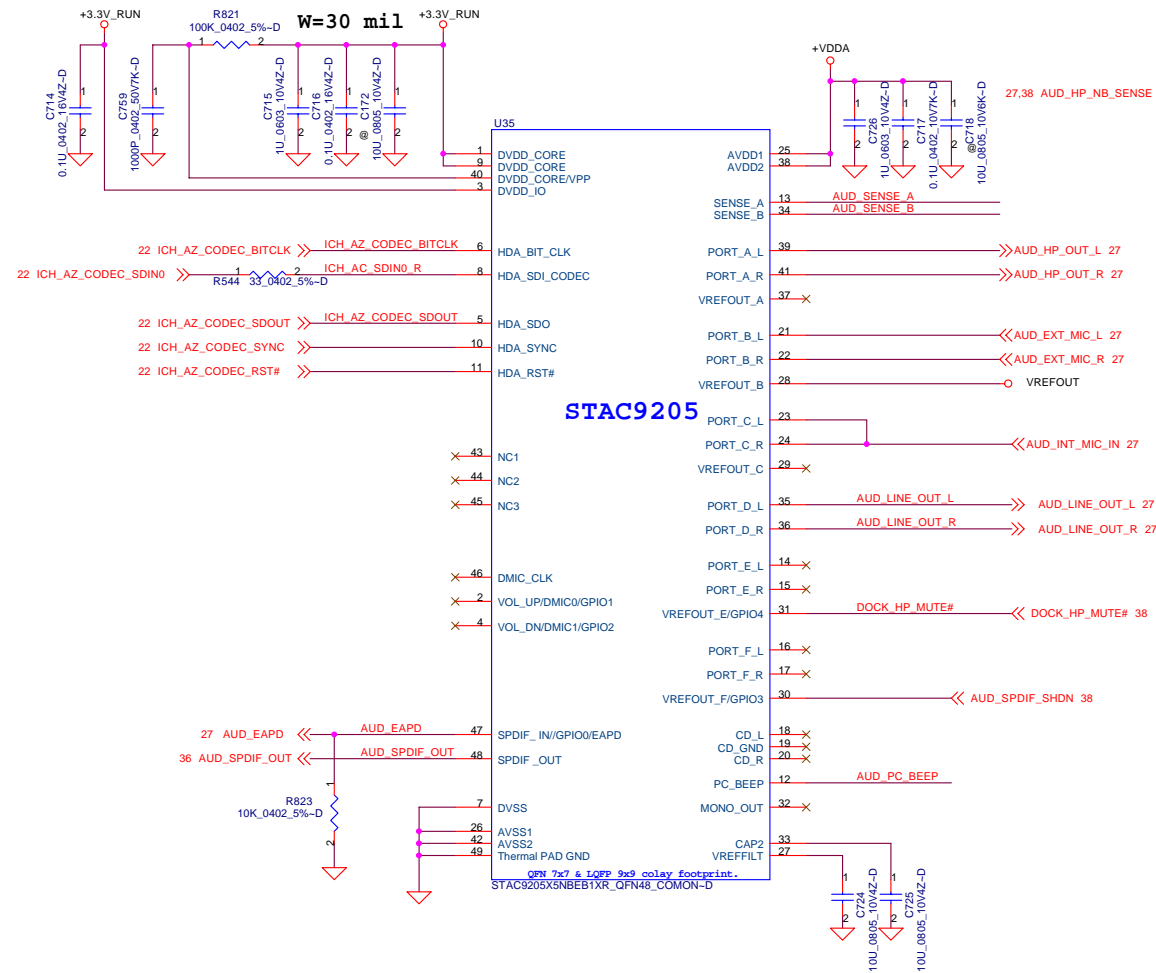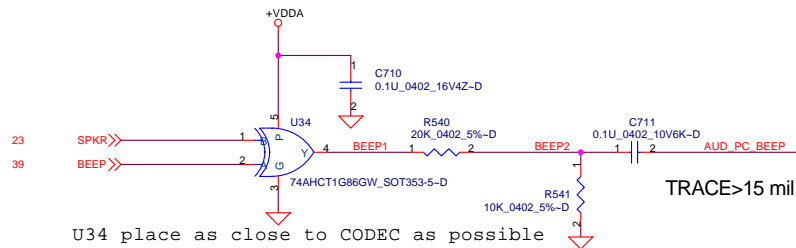






DELL CONFIDENTIAL/PROPRIETARY




Compal Electronics, Inc.			
Azalia (HD) Codec			
LA-3301P	Rev 1.0		
Date: Monday, February 26, 2007	Sheet 26 of 58		

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



Speaker Connector

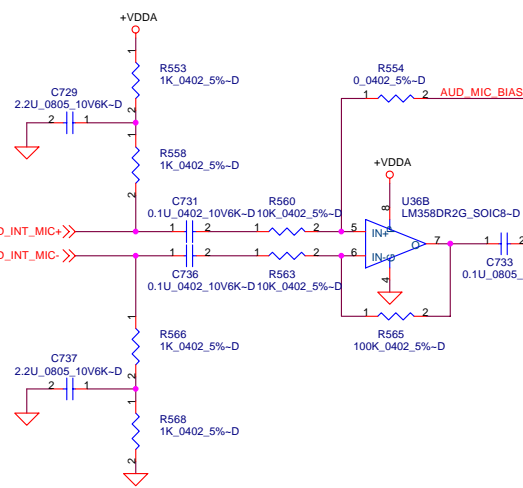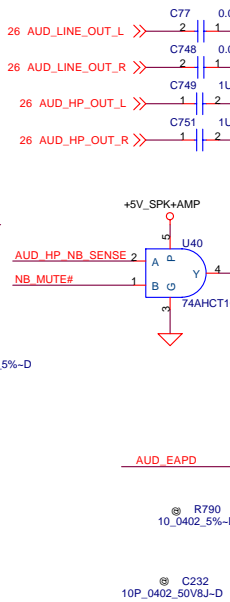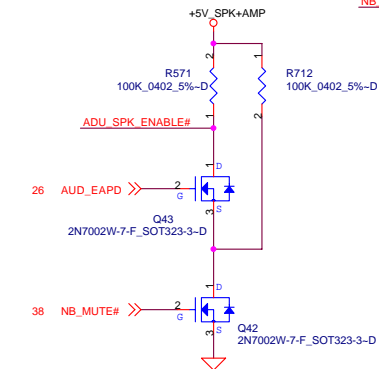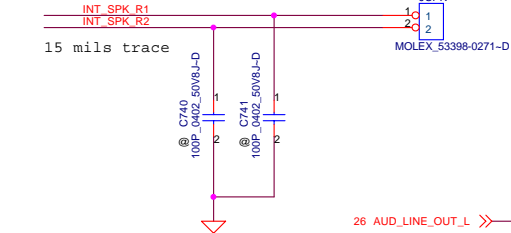


Place Close to Audio Chip




MAX9789A

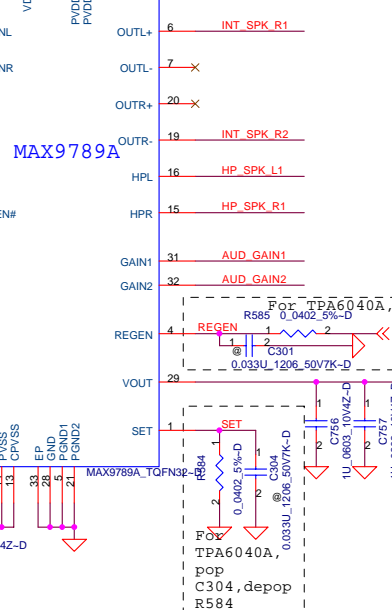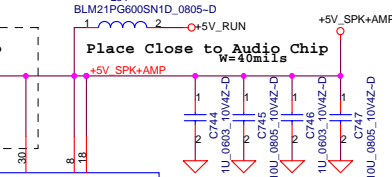

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

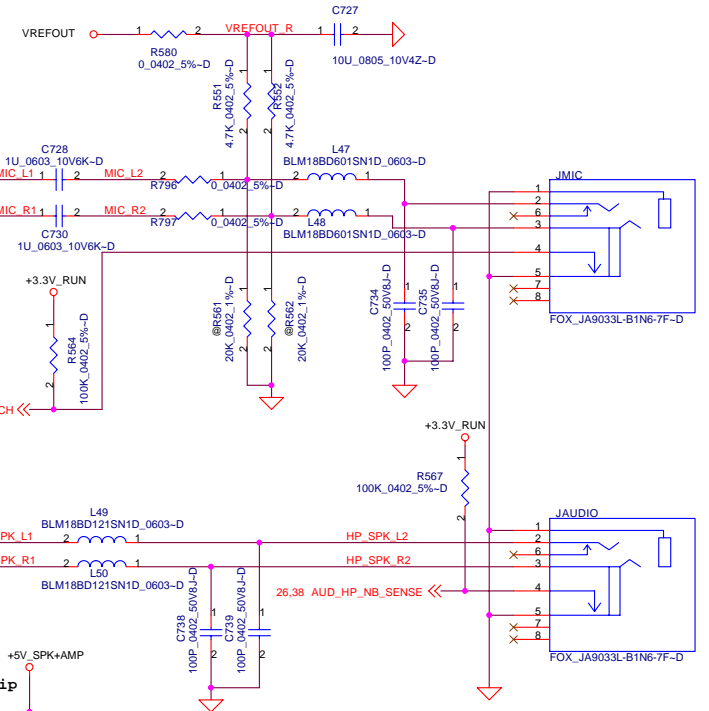

Gain Setting

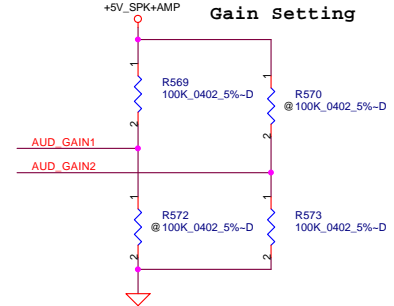

GAIN1	GAIN2	AV (inv)	INPUT IMPEDANCE
0	0	6dB	82K ohm
0	1	10dB	66K ohm
1	0	15.6dB	45K ohm
1	1	21.6dB	26K ohm


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

AMP and PHONE JACK

LA-3301P




Date: Wednesday, March 07, 2007 Sheet 27 of 58

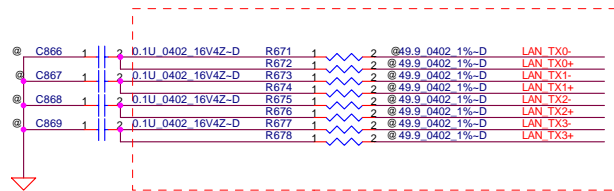

Layout Notice : Place termination as close as ASIC as possible

The resistors need at least 1/16W

Layout Notice : Place bead as close PI3L500 as possible

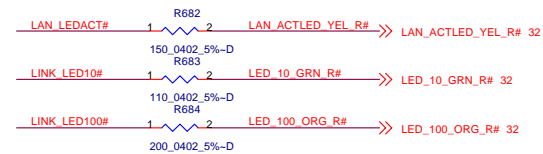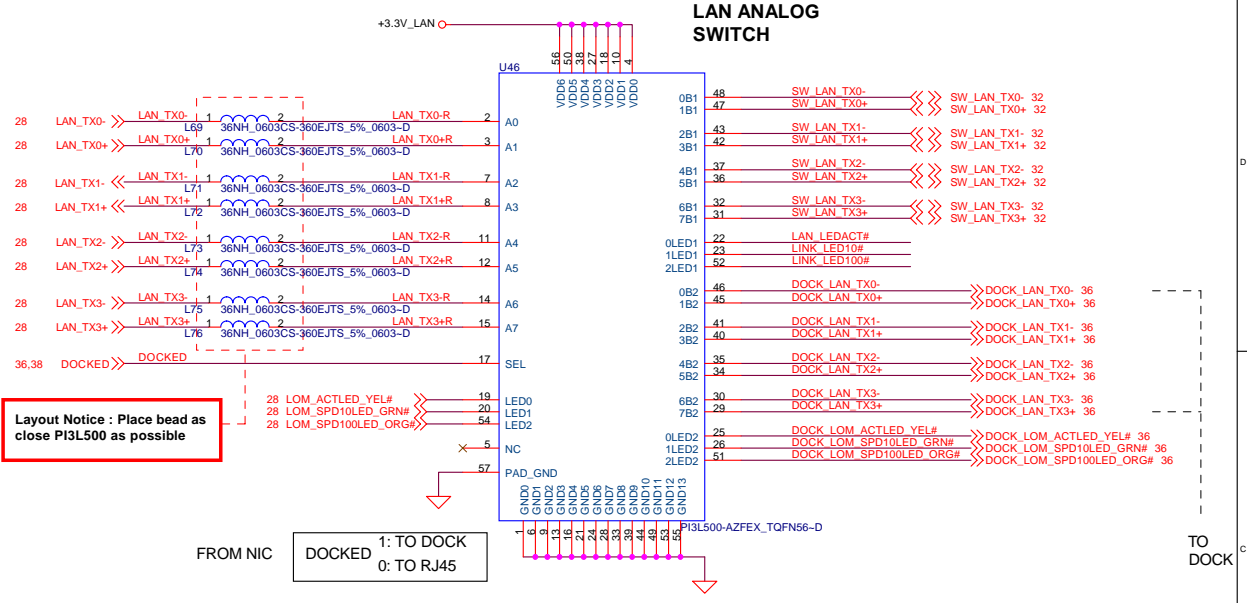


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.



Title			
LAN TRANSFORMER			
Size	Document Number	Rev	
	LA-3301P	1.0	
Date	Monday, February 26, 2007	Sheet	29 of 58

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

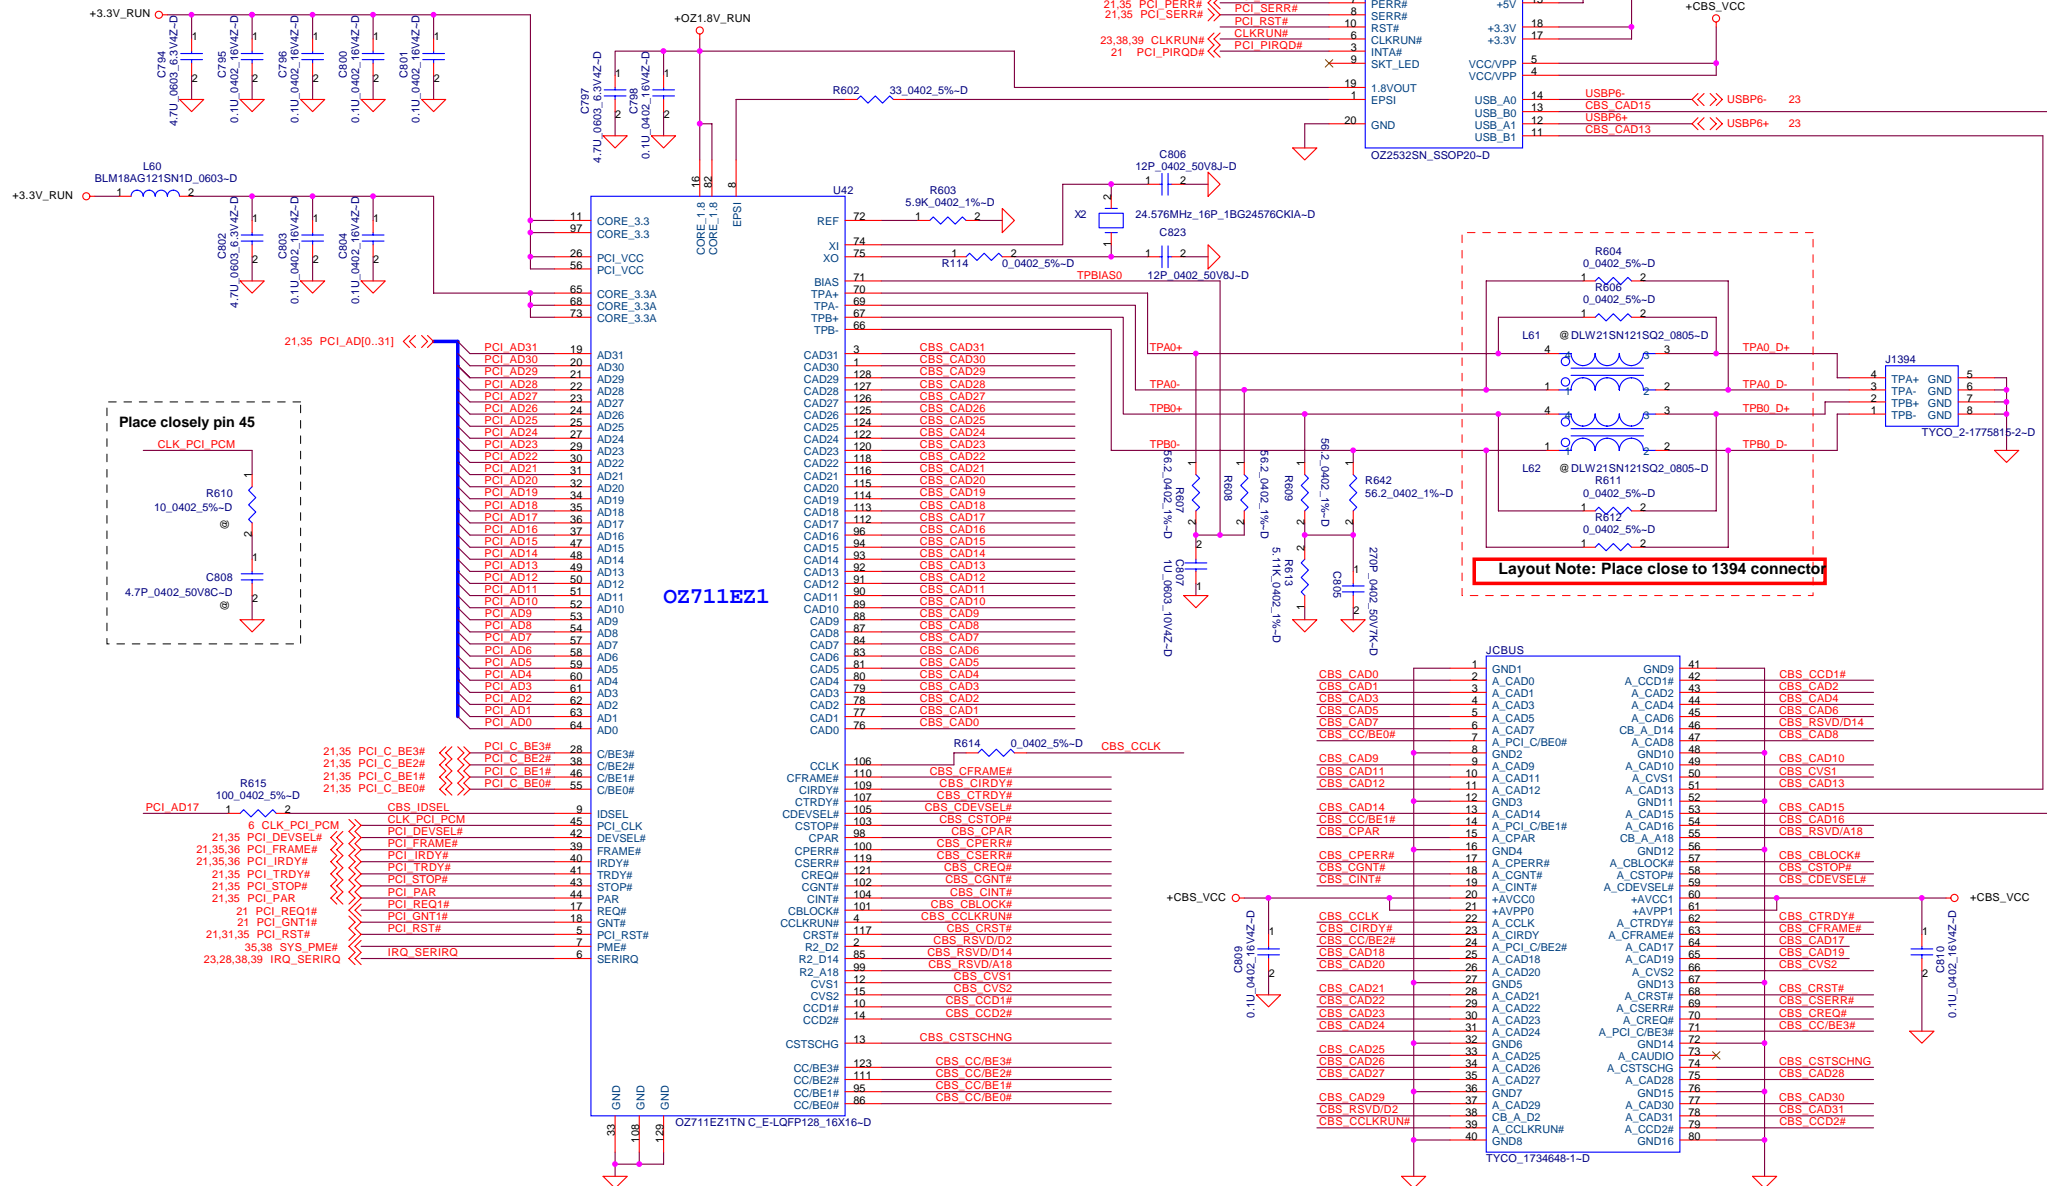

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title
Cardbus and 1394 OZ711EZ1 Controller


Size Document Number

LA-3301P

Date: Monday, February 26, 2007 Sheet 30 of 58

Rev 1.0

USB SMARTCARD READER.
TYPE A (5V), B (3V), AB (5V/3V)
& USB SMARTCARDS ARE SUPPORTED.

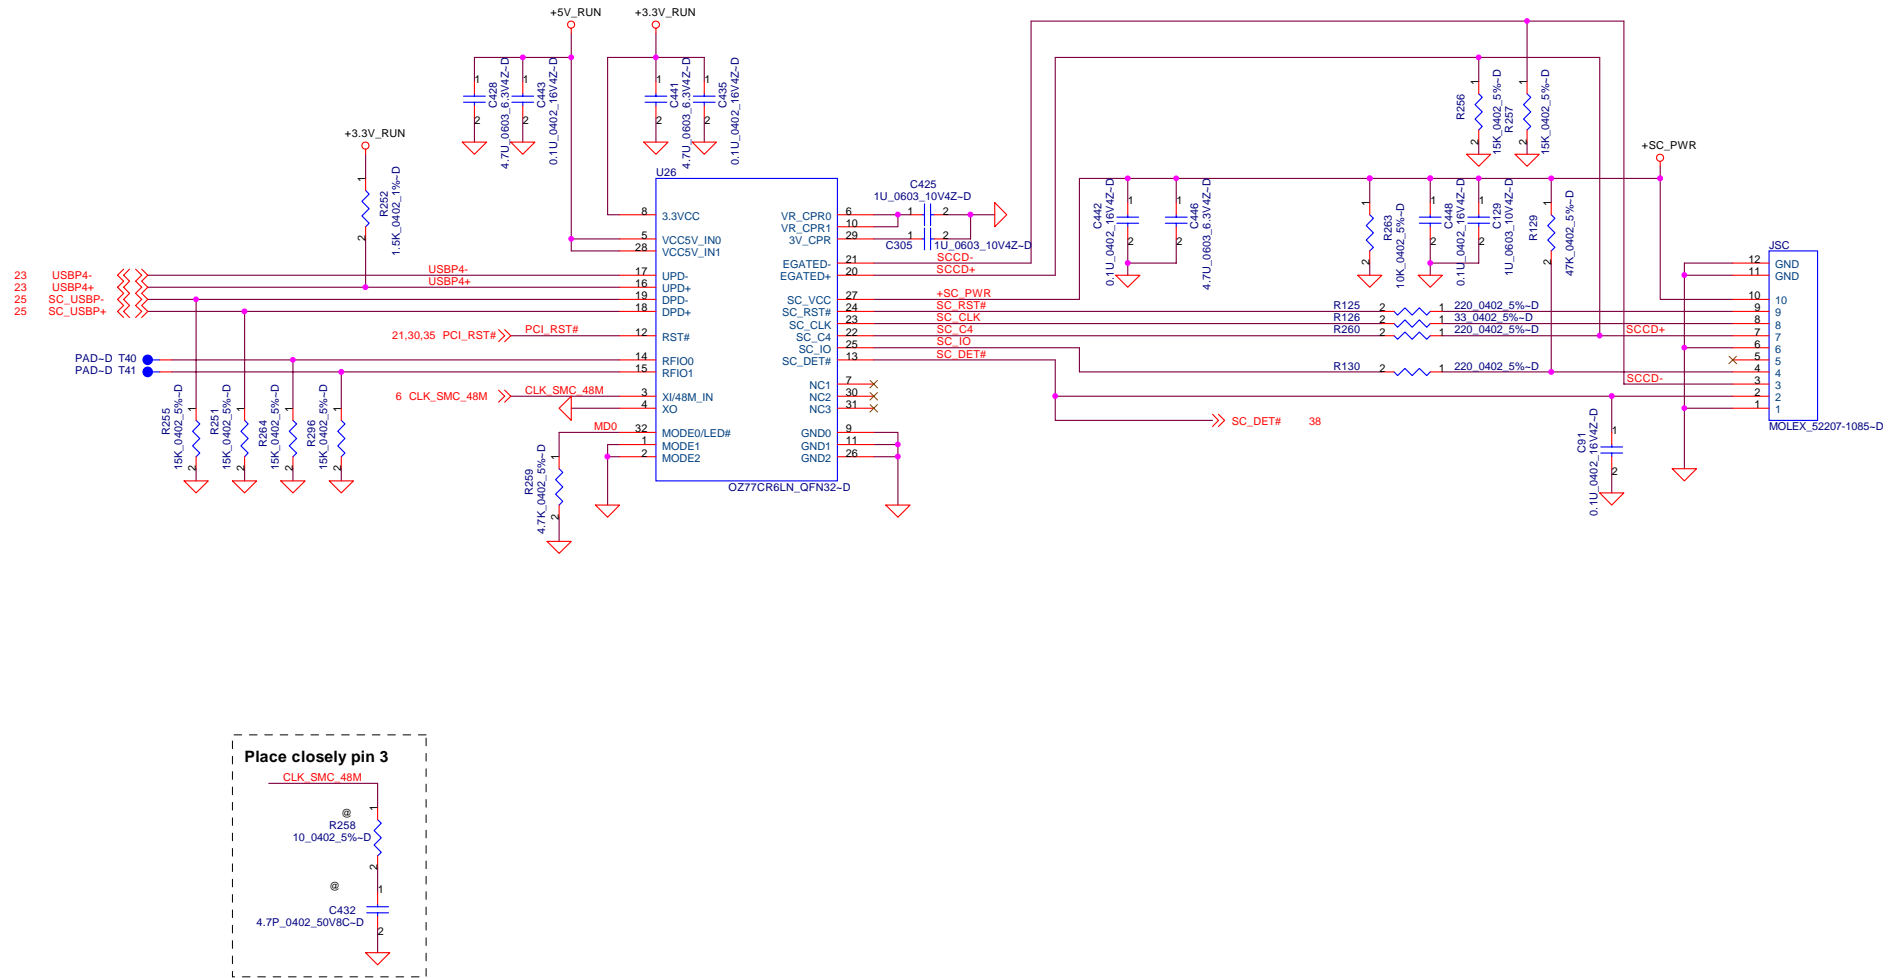

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY






Compal Electronics, Inc.

Smart Card OZ77CR6

LA-3301P

Rev 1.0

Date: Monday, February 26, 2007 Sheet 31 of 58

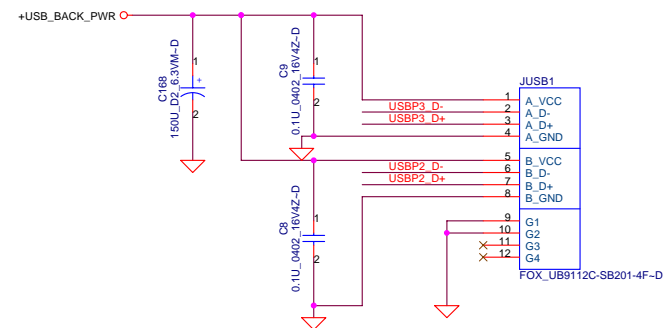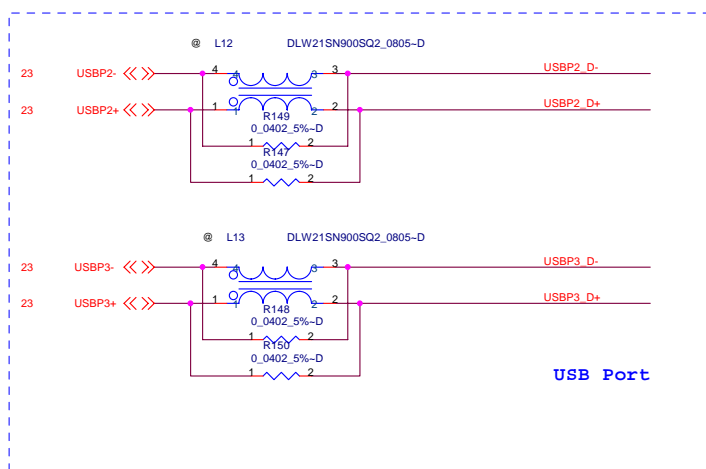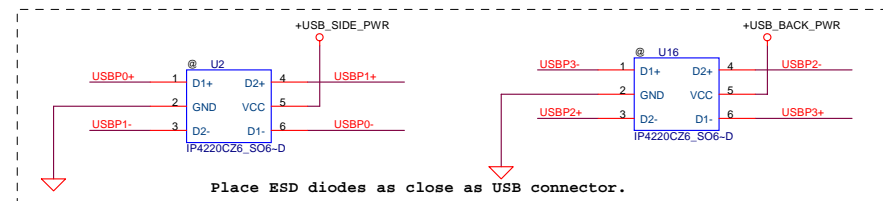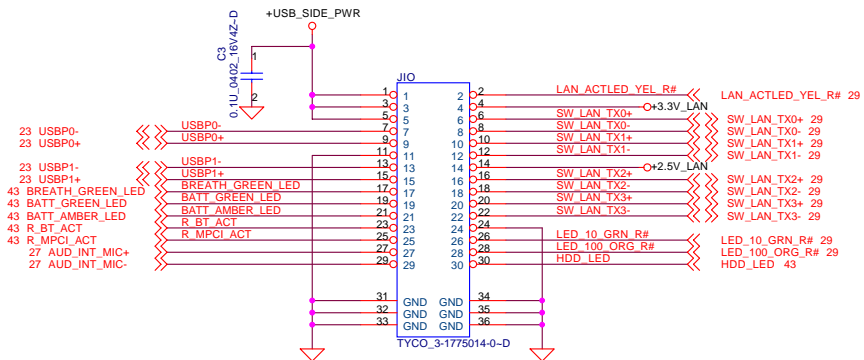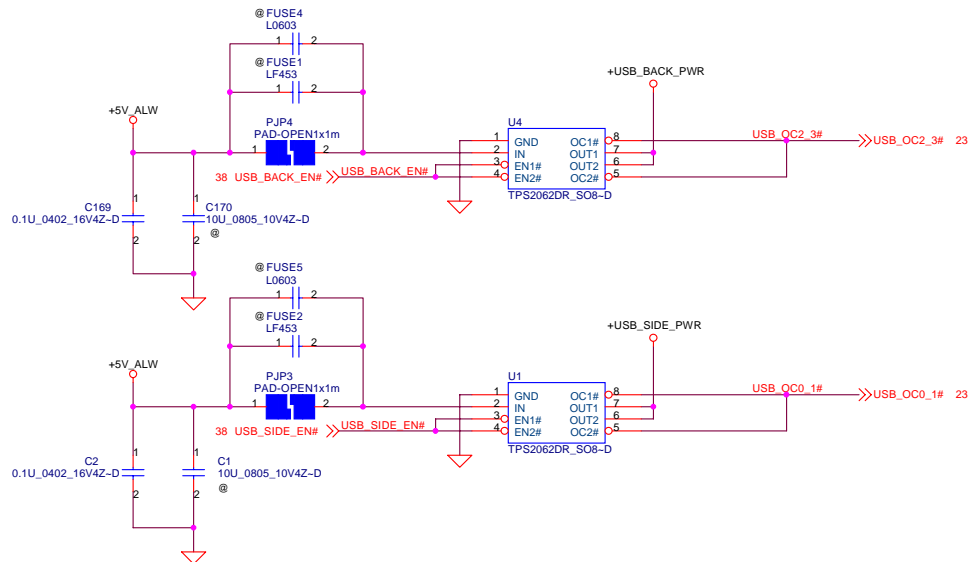

Rear USB Ports

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.


USB 2.0 Port

LA-3301P

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ('DELL'). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.




Title		Rev	
Size	Document Number	1.0	
Date	Monday, February 26, 2007	Sheet	32 of 58

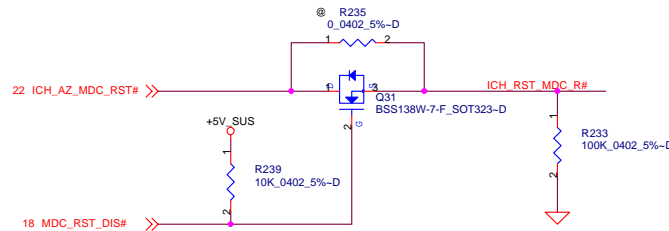

New MDC connector.

1	GND	RES	2
3	IAC_SDATA0	RES	4
5	GND	3.3V	6
7	IAC_SYNC	GND	8
9	IAC_SDATAIN	GND	10
11	IAC_RESET#	IAC_BITCLK	12

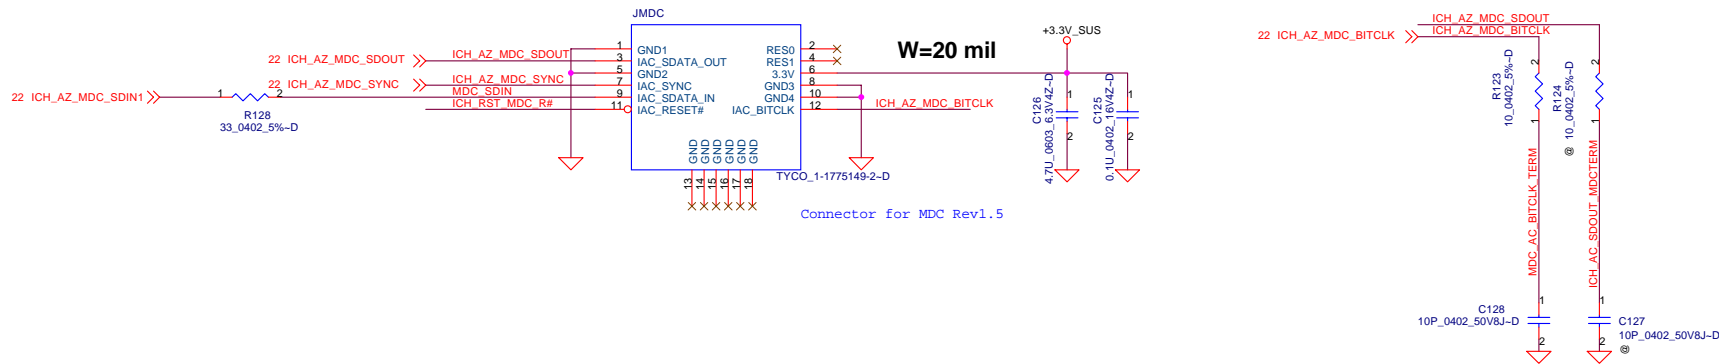

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.





DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

BT PORT and MDC




LA-3301P

Title	Document Number	Rev
Size	10P_0402_50V8J-D	1.0
Date:	Monday, February 26, 2007	Sheet 33 of 58

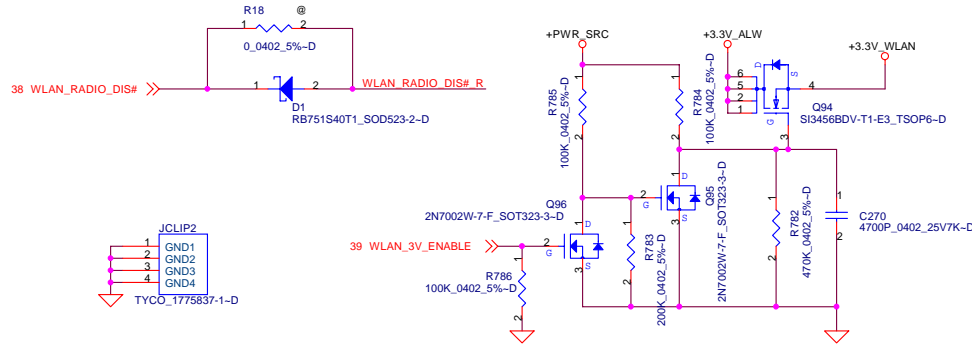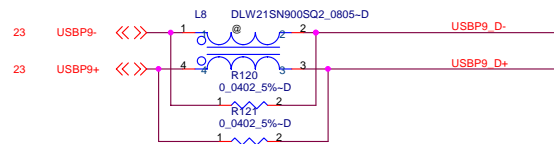






Mini-Card Latch

Mini WLAN

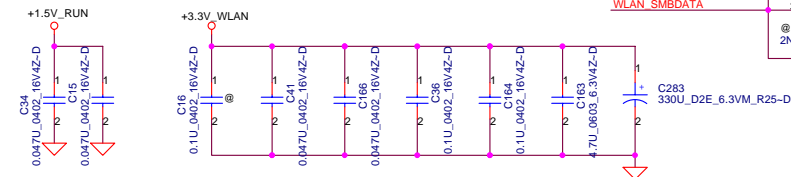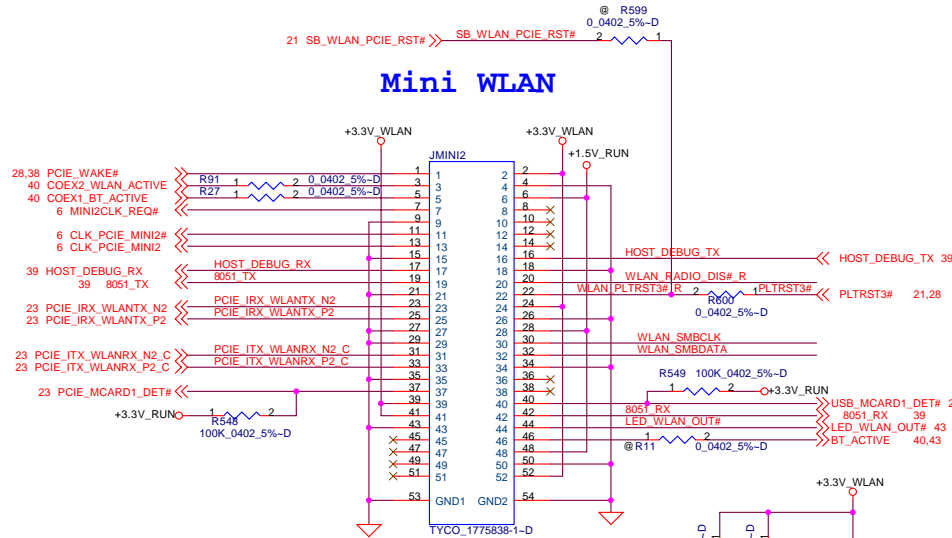

Mini-Card Latch

Mini WWAN

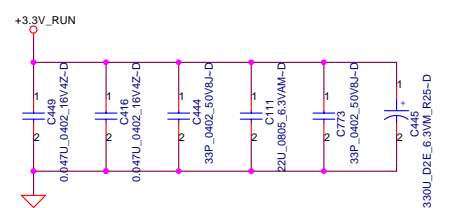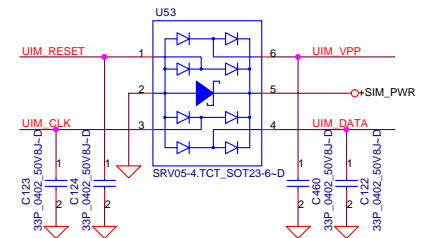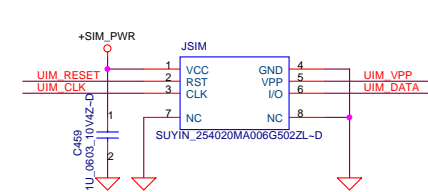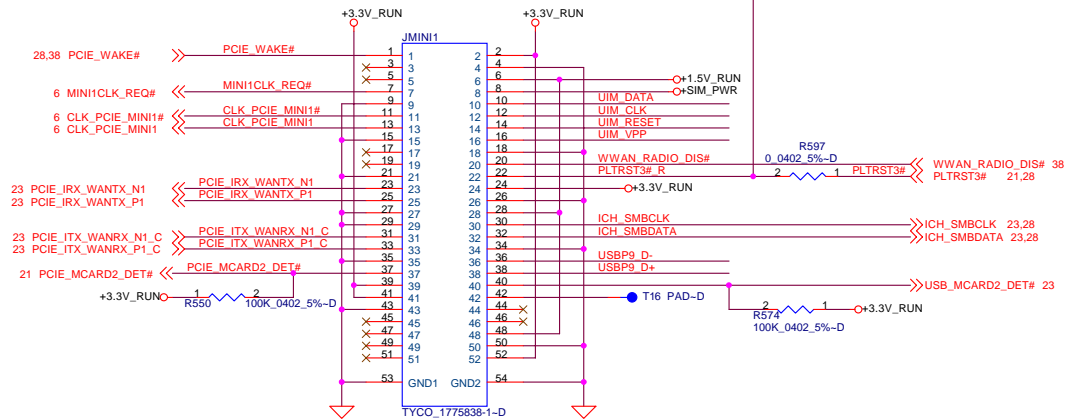



PWR Rail	Voltage Tolerance	Primary Power		Aux Power
		Peak	Normal	Normal
+3.3V	+9%	1000	750	
+3.3Vaux	+9%	330	250	250 (Wake enable) 5 (Not wake enable)
+1.5V	+5%	500	375	NA

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSMITTED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.			
Mini Card			
Size	Document Number	Rev	
	LA-3301P	1.0	
Date	Monday, February 26, 2007	Sheet	34 of 58

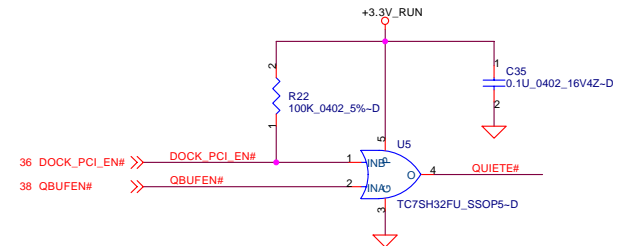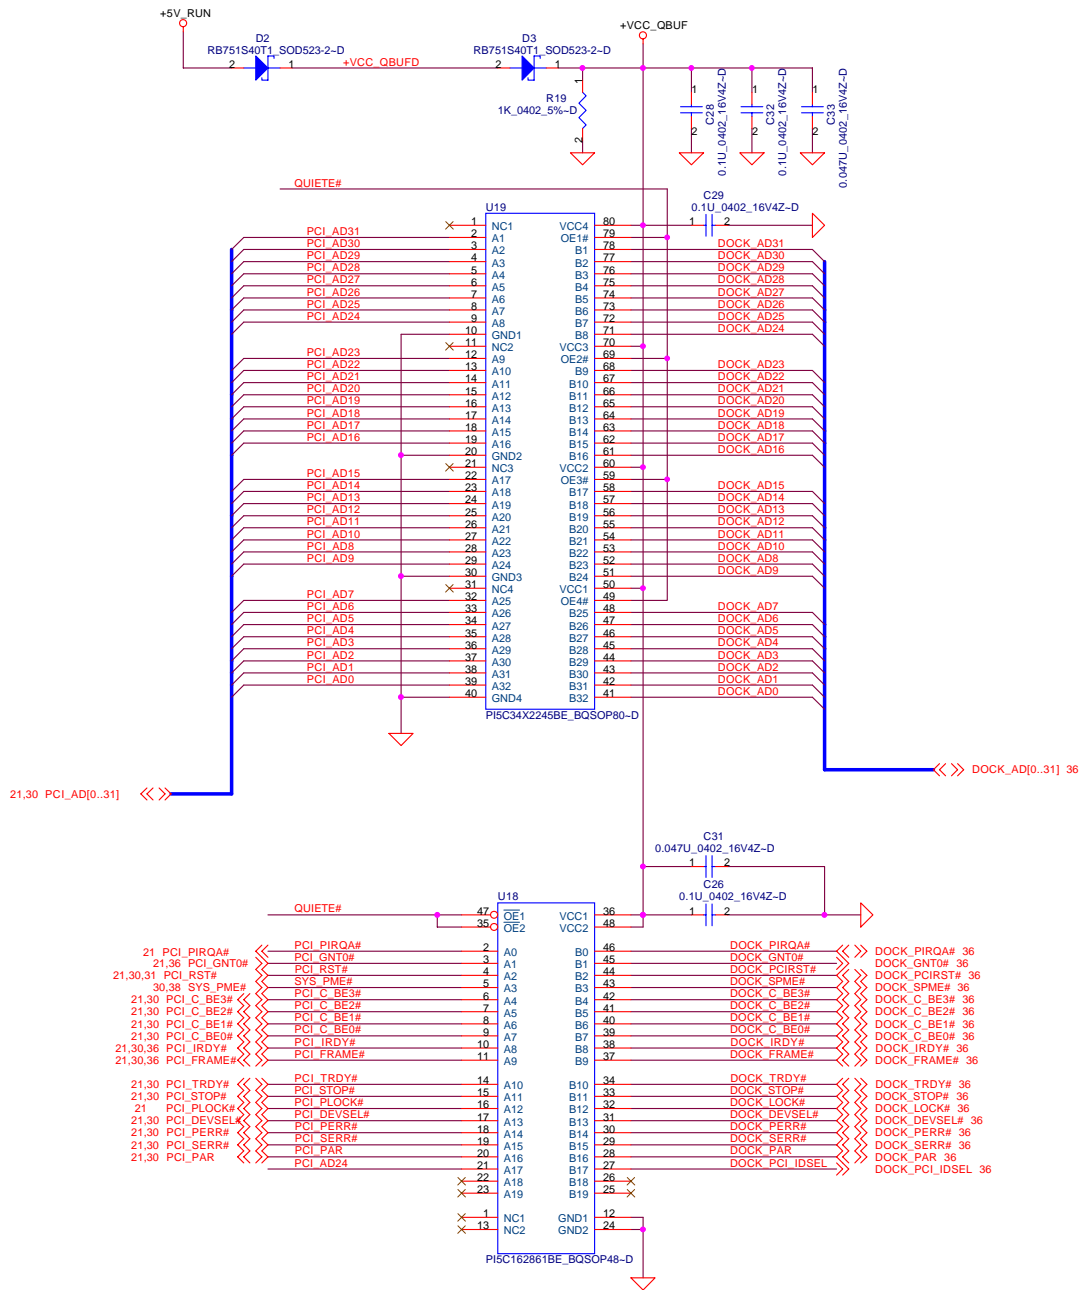

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.




DELL CONFIDENTIAL/PROPRIETARY




Compal Electronics, Inc.

Title DOCKING BUFFER

Size Document Number LA-3301P Rev 1.0

Date: Monday, February 26, 2007 Sheet 35 of 58

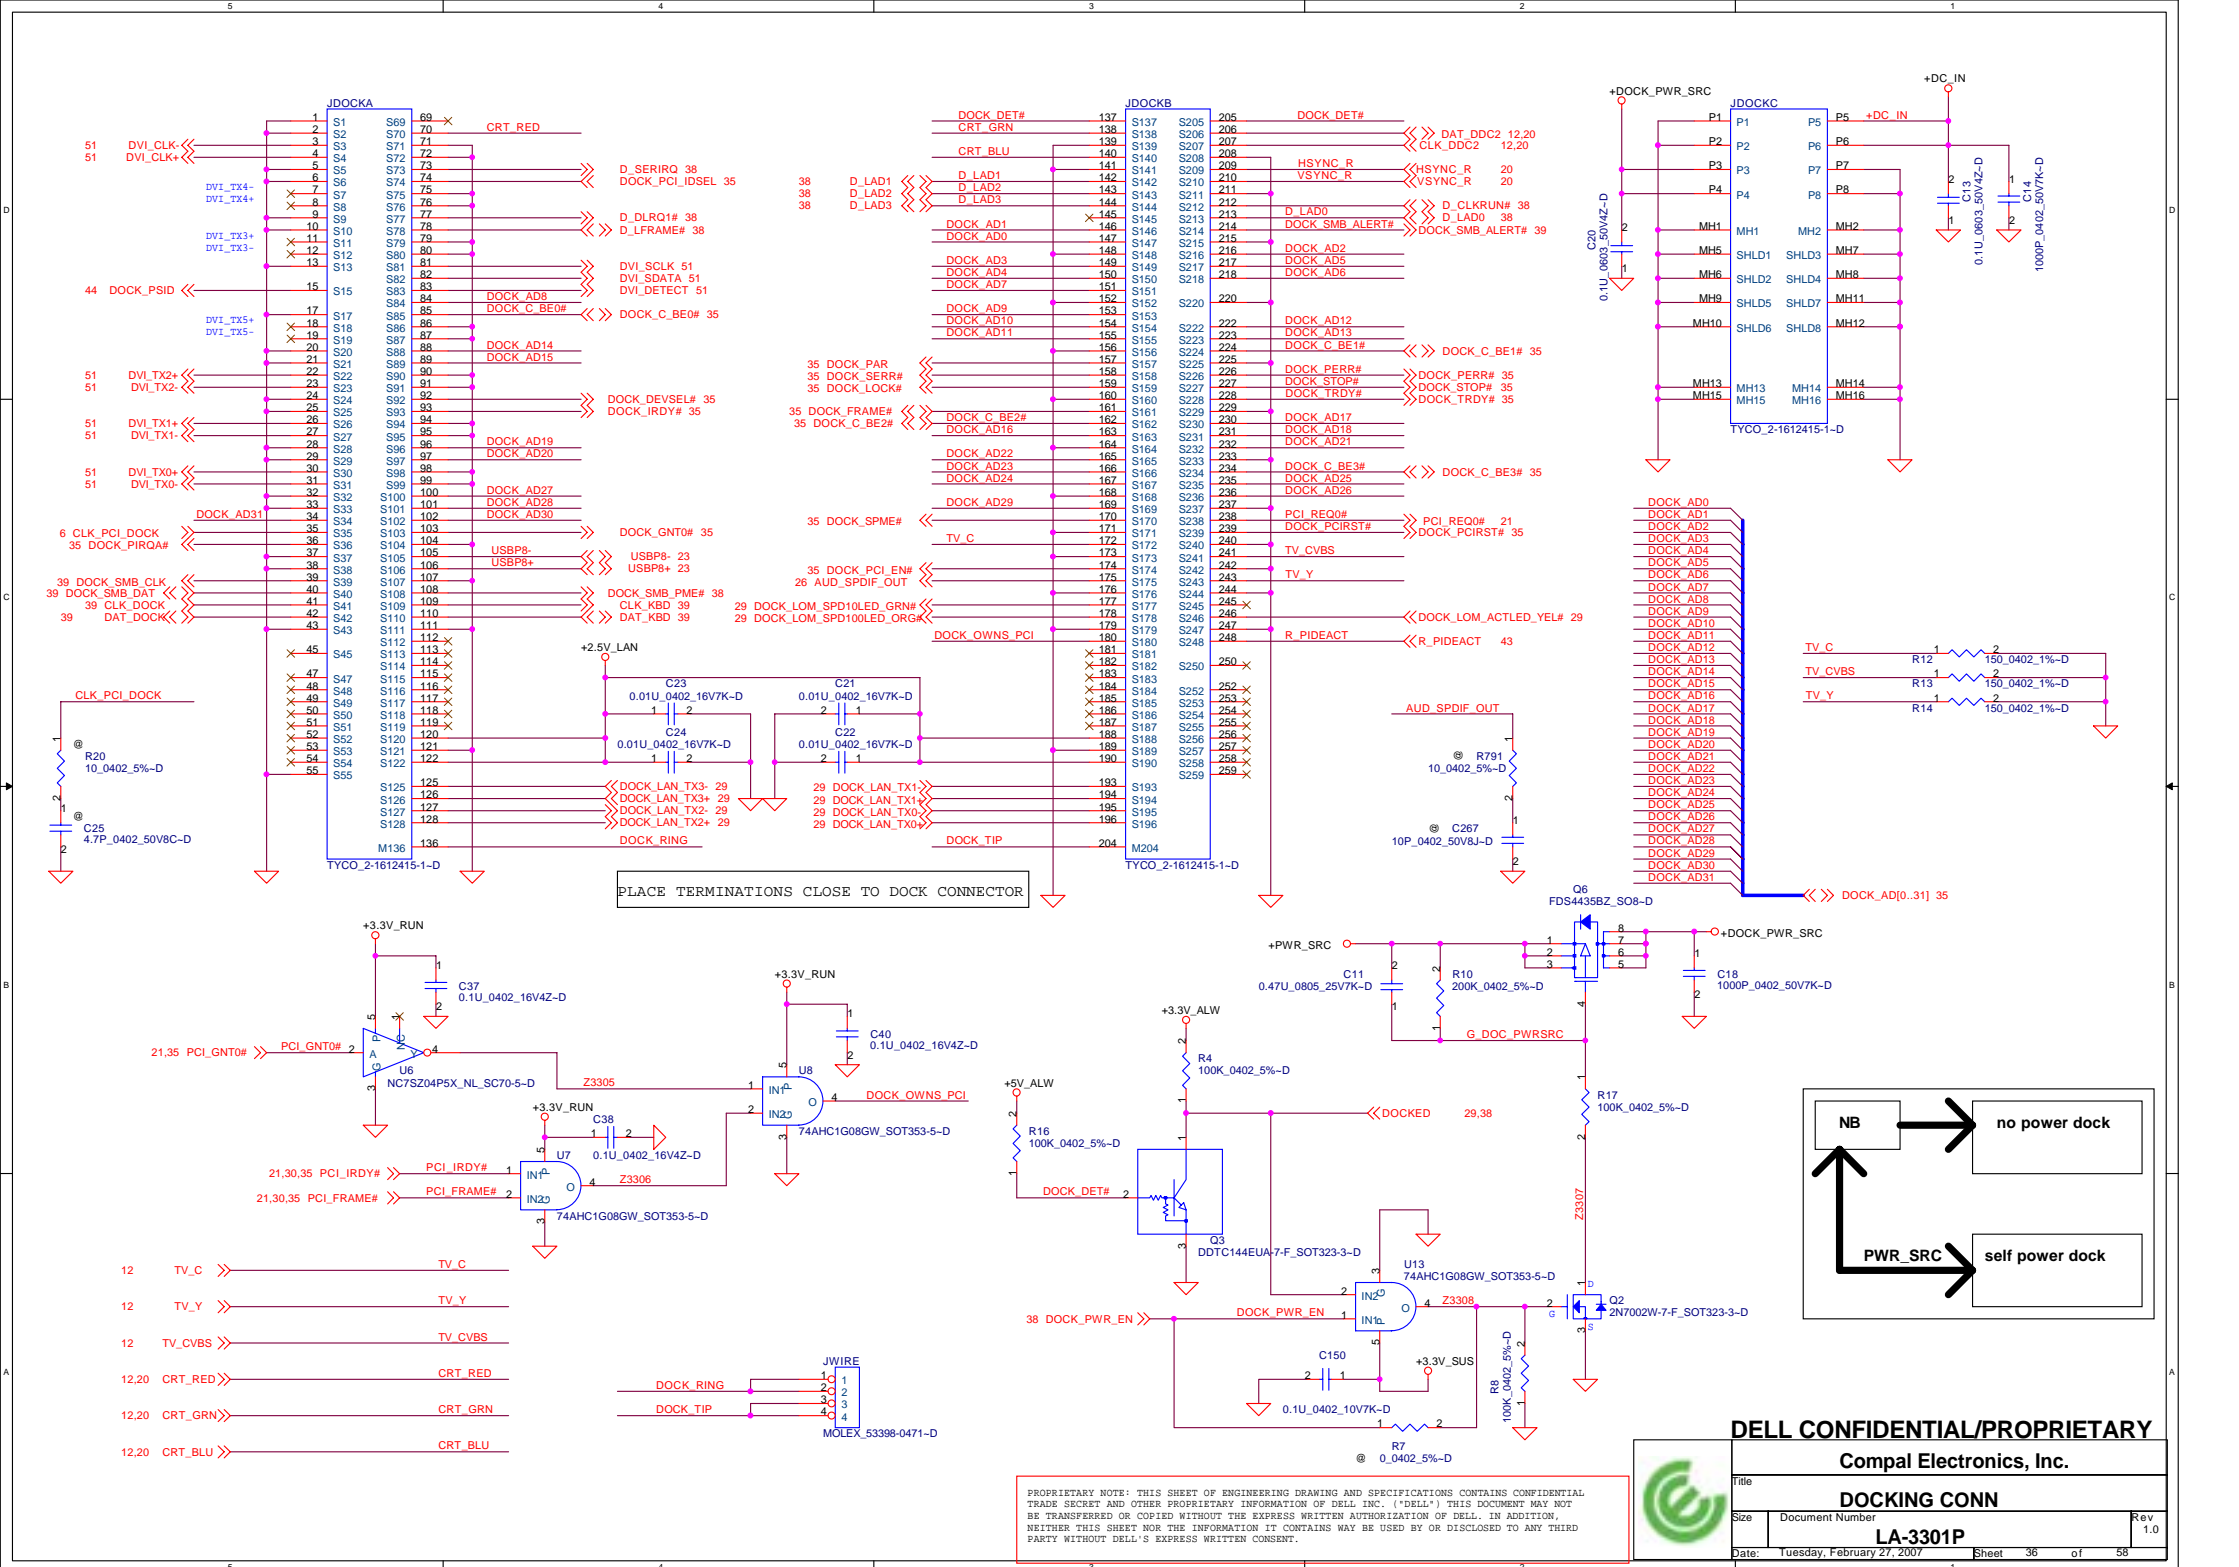

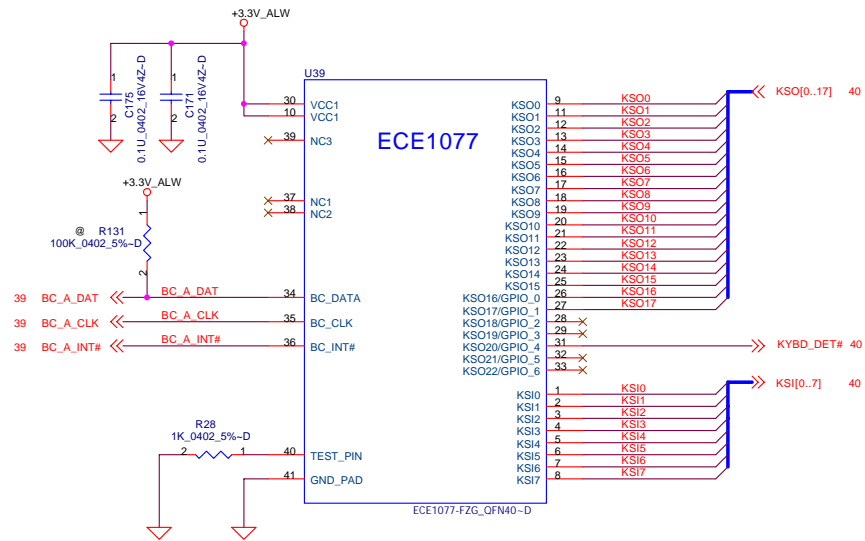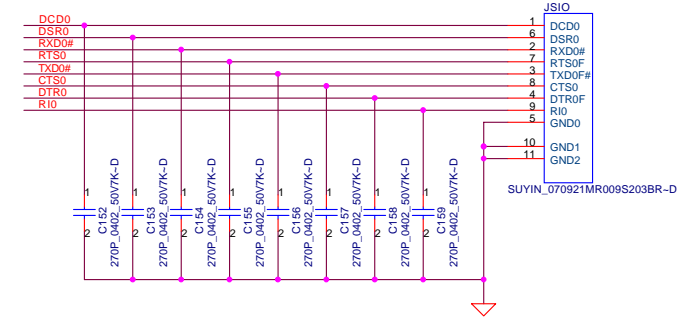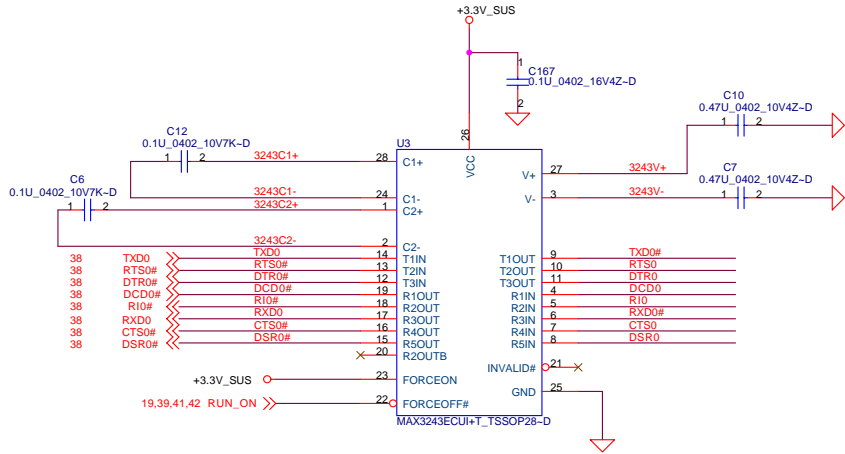

DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.	
Title	
Serial & FIR	
Size	Document Number
LA-3301P	
Date	Monday, February 26, 2007
Sheet	37 of 58
Rev	1.0

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



Size	Document Number	Rev
	LA-3301P	1.0
Date:	Monday, February 26, 2007	Sheet 38 of 58

Touch PAD

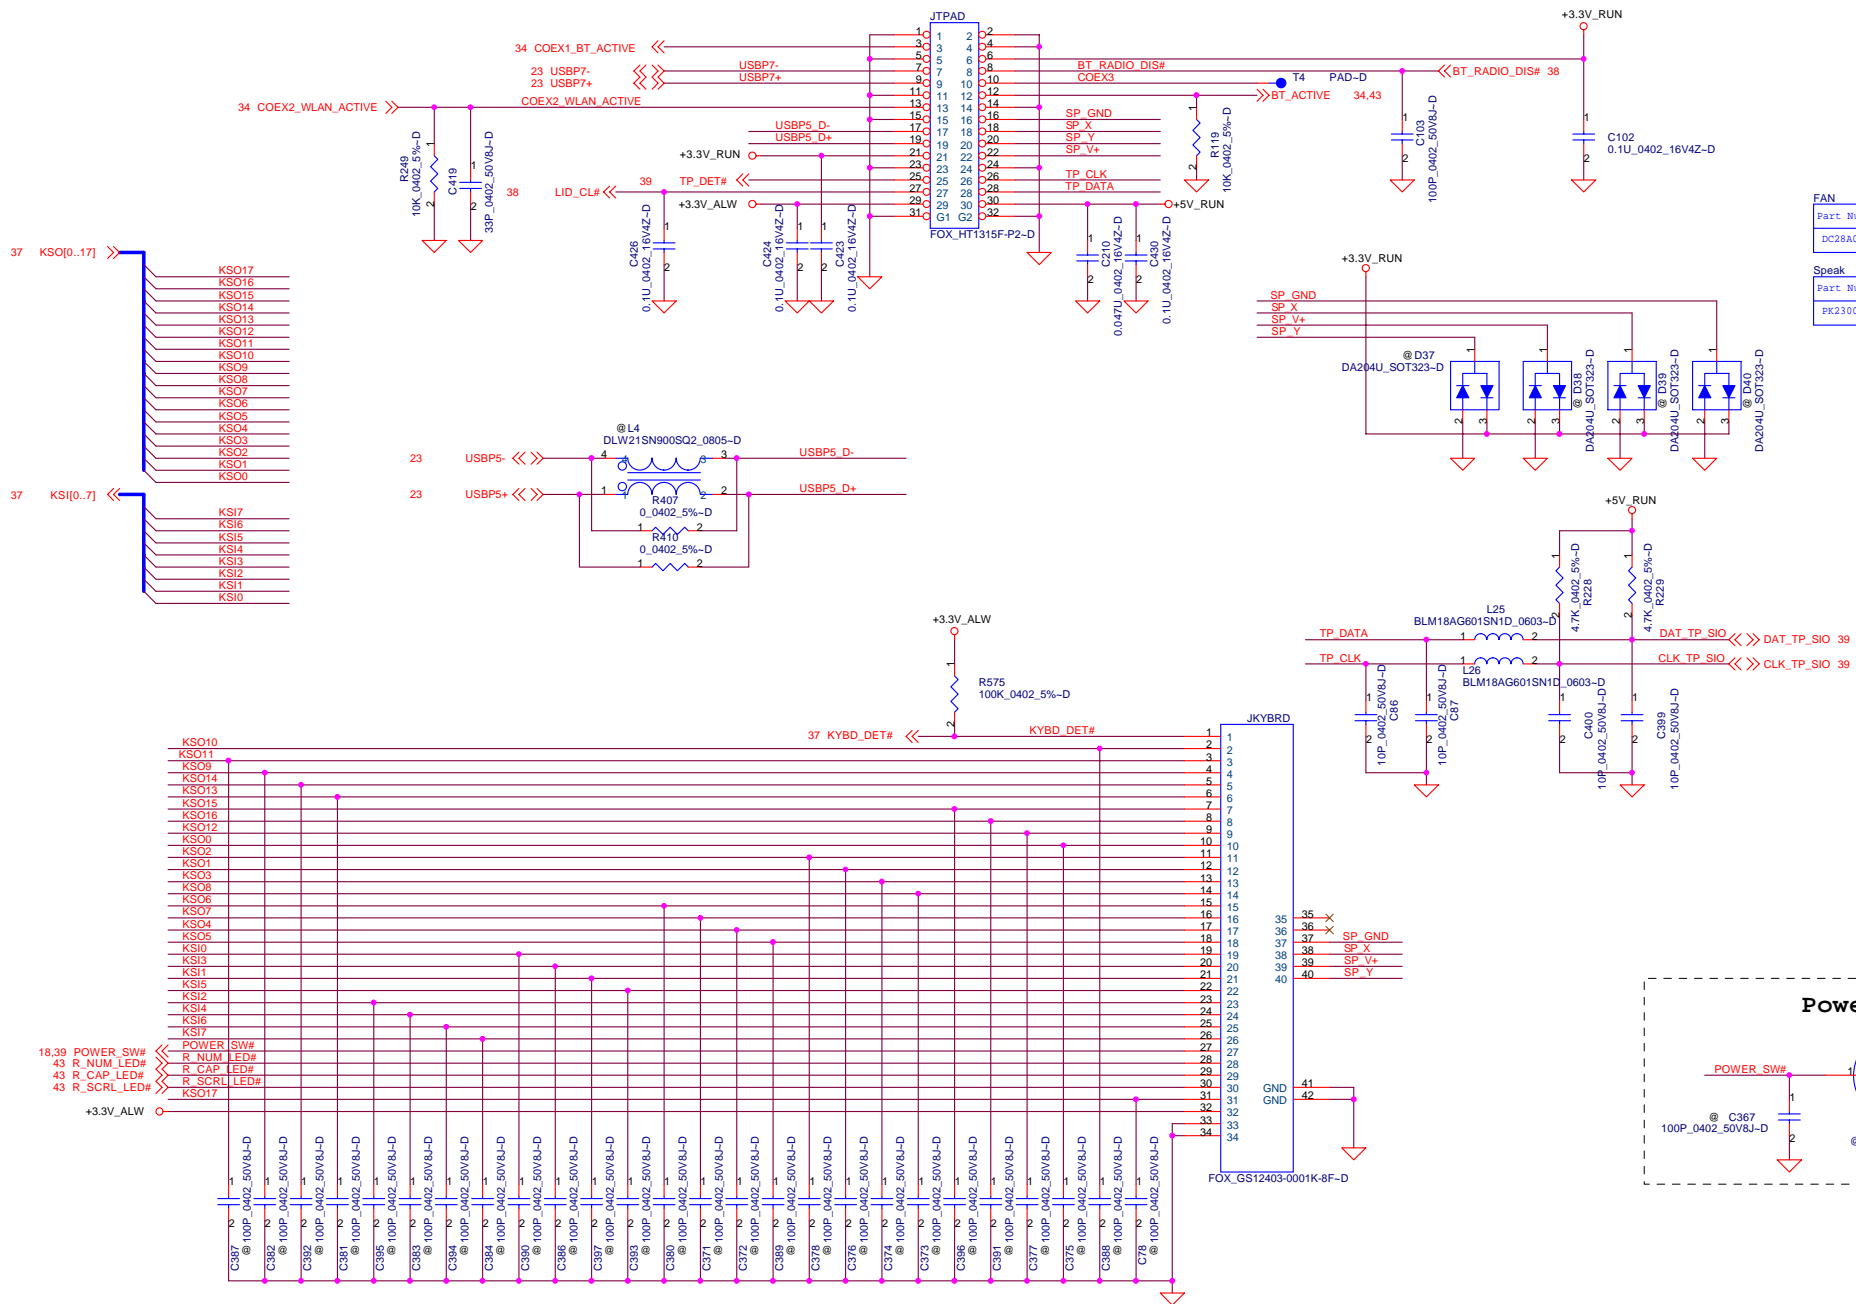

FAN	
Part Number	Description
DC28A000800	FAN SET DAQ20 DC5V AB7405HB-HB3 ADDA

Part Number	Description
PK230003Q0L	SPK PACK ZJX 2.0W 4 OHM FG

Part Number	Description
SP070007V0L	S SOCKET TYCO 1770551-1 10P H5.9 SMART

PCMCIA BODY	
Part Number	Description
DC000001Q0L	PCMCIA TYCO 1759096-1


Part Number	Description
DC02000CS0L	H-CONN SET ZGX MB-MDC

Part Number	Description
DC02000840L	H-CONN SET ZUX MB-B/T-TP-FP

Part Number	Description
DC020003Y0L	H-CONN SET ZJX MB-LCD 14 WXGA+(-1ch)

LVDS cable	
Part Number	Description
DC02000870L	H-CONN SET ZJX MB-LCD 14 WXGA+(-2ch)

RTC BATT	
Part Number	Description
GC20323MX00	BATT CR2032 3V 220MAH MAXELL

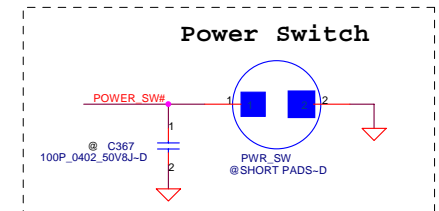

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

INT KB

LA-3301P





Rev
1.0

LA-3301P			
Date:	Monday, February 26, 2007	Sheet	40 of 58

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ('DELL'). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DC/DC Interface

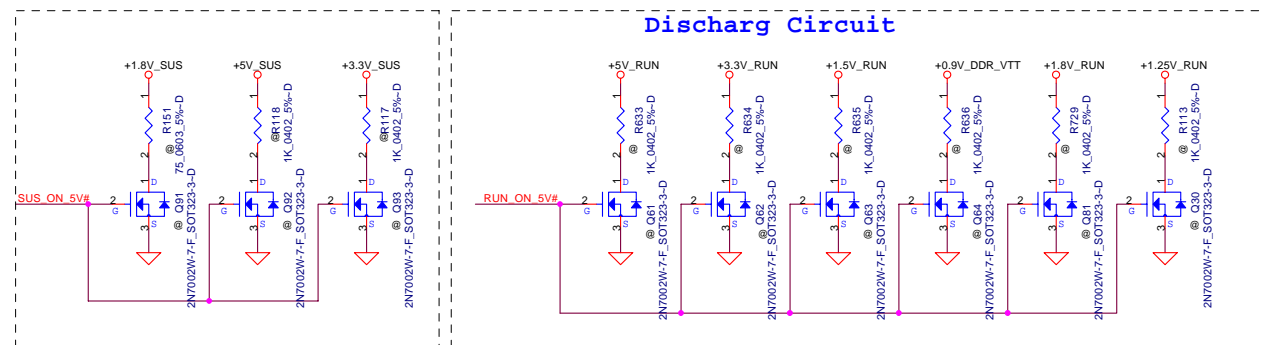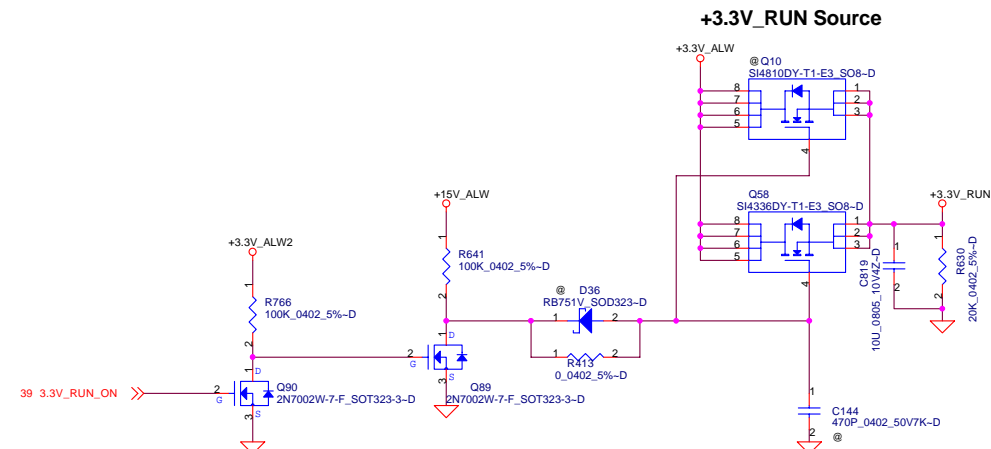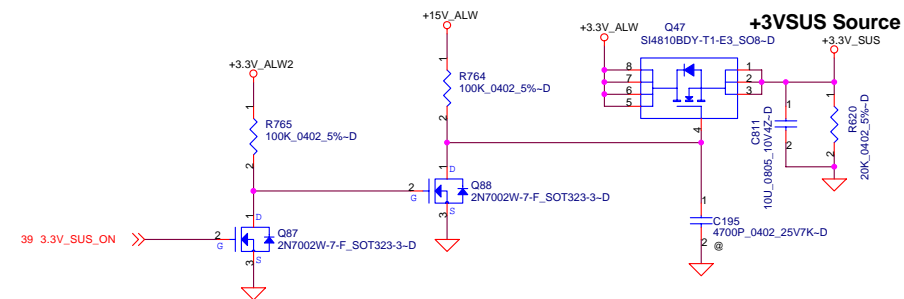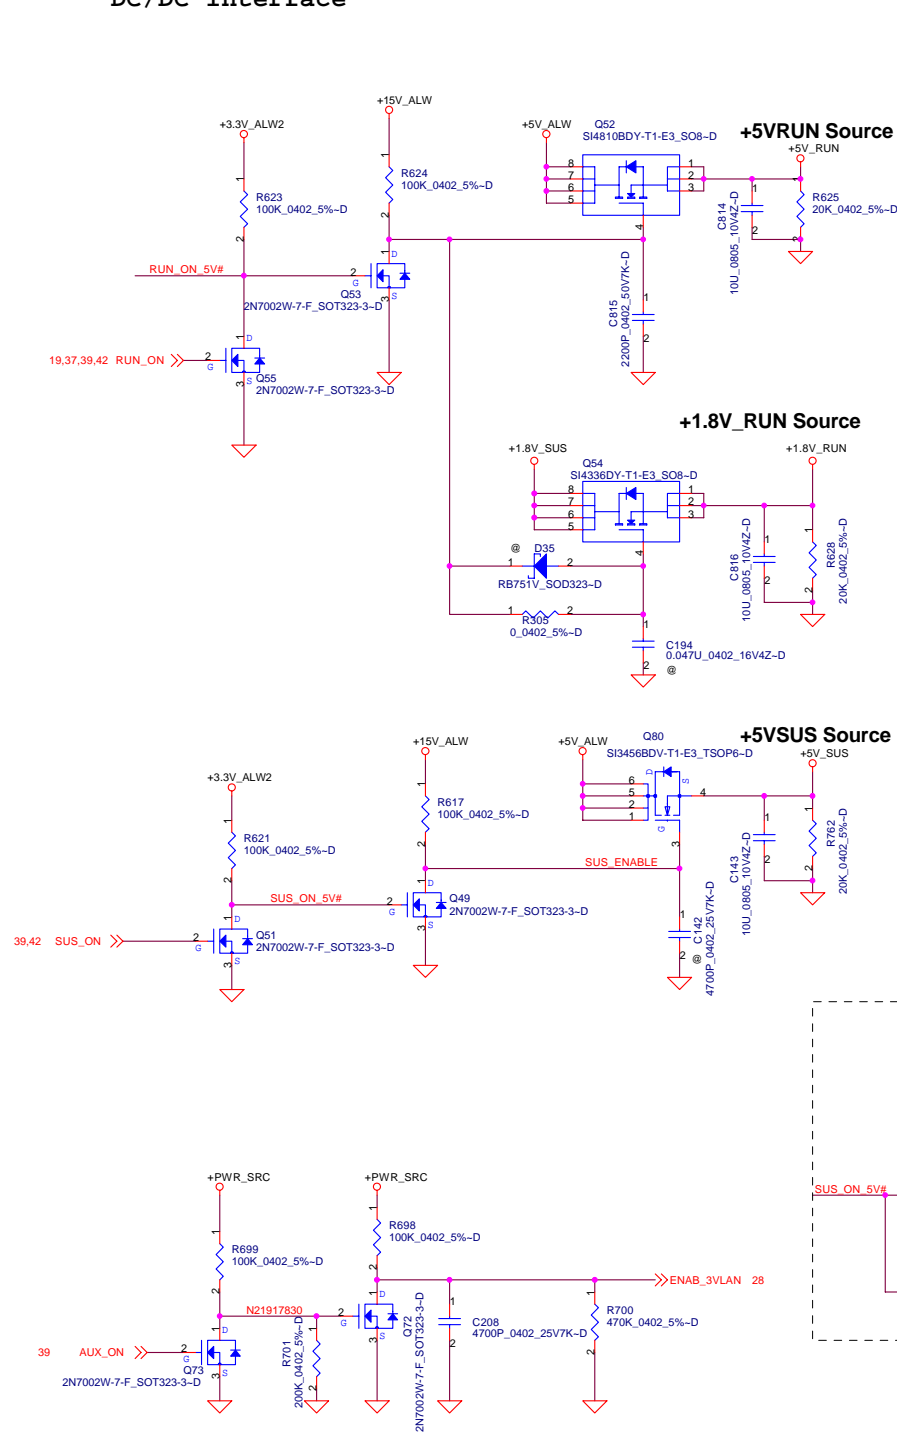

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.








POWER CONTROL

LA-3301P

LA-3301P

Date: Monday, February 26, 2007 Sheet 41 of 58

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ('DELL'). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

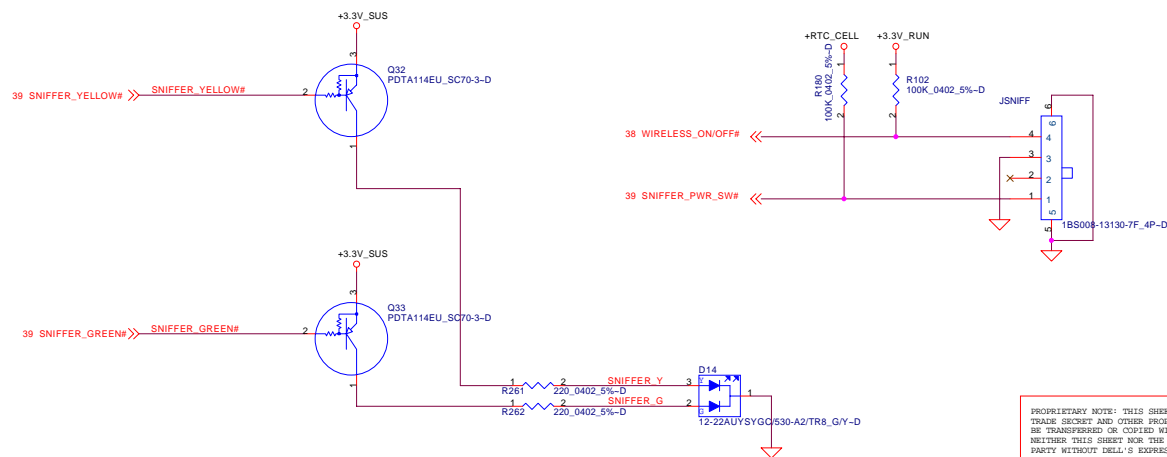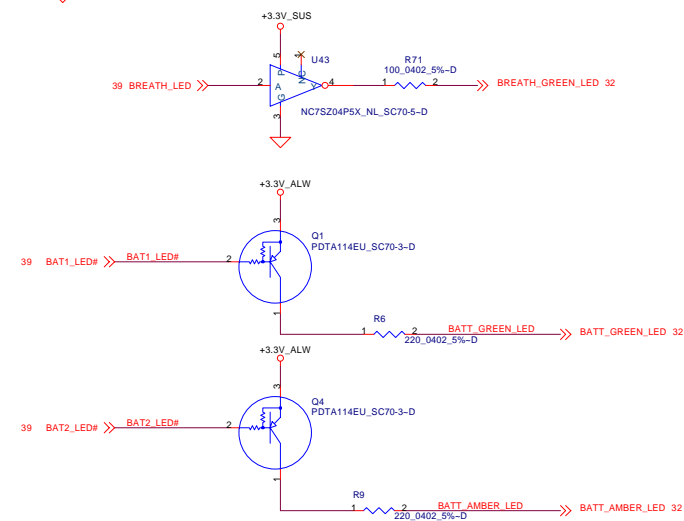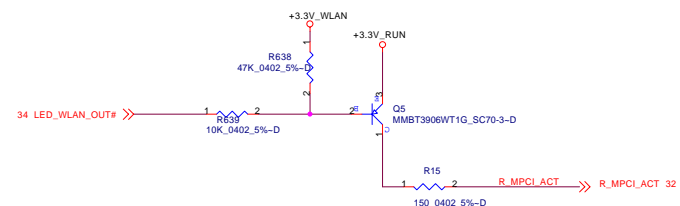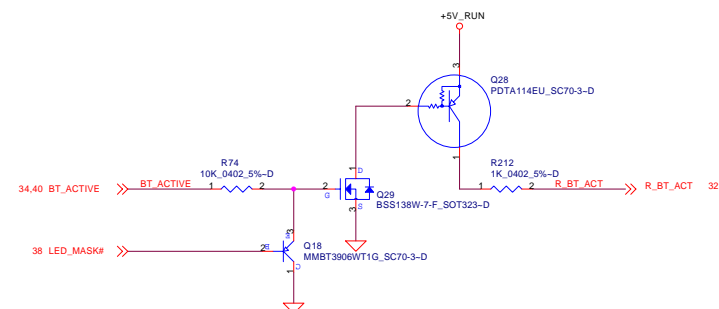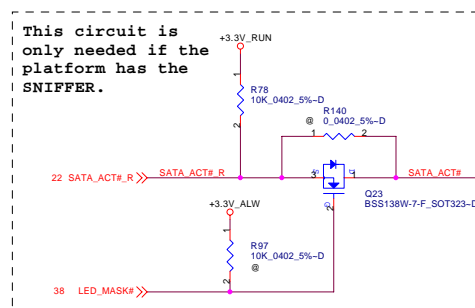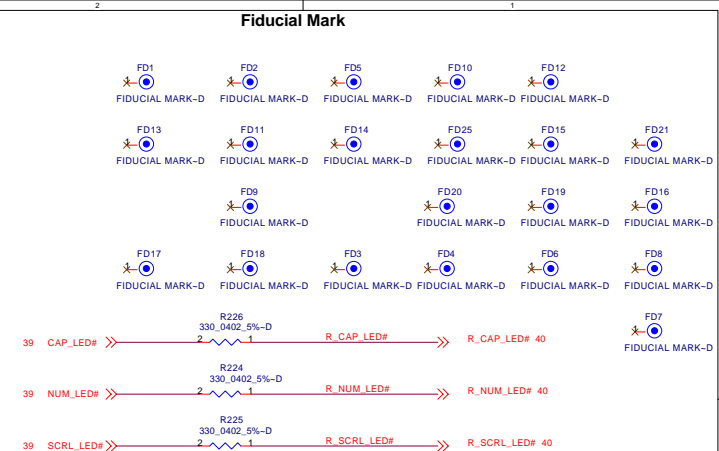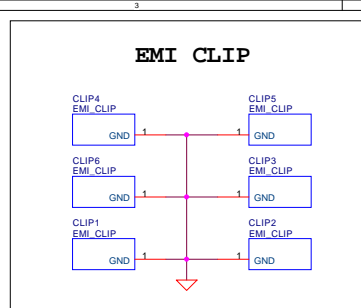

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL.") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

DELL CONFIDENTIAL/PROPRIETARY



Compal Electronics, Inc.

PAD and Standoff

LA-3301P

LA-3301F

Date: Monday, February 26, 2007 Sheet 43 of 58

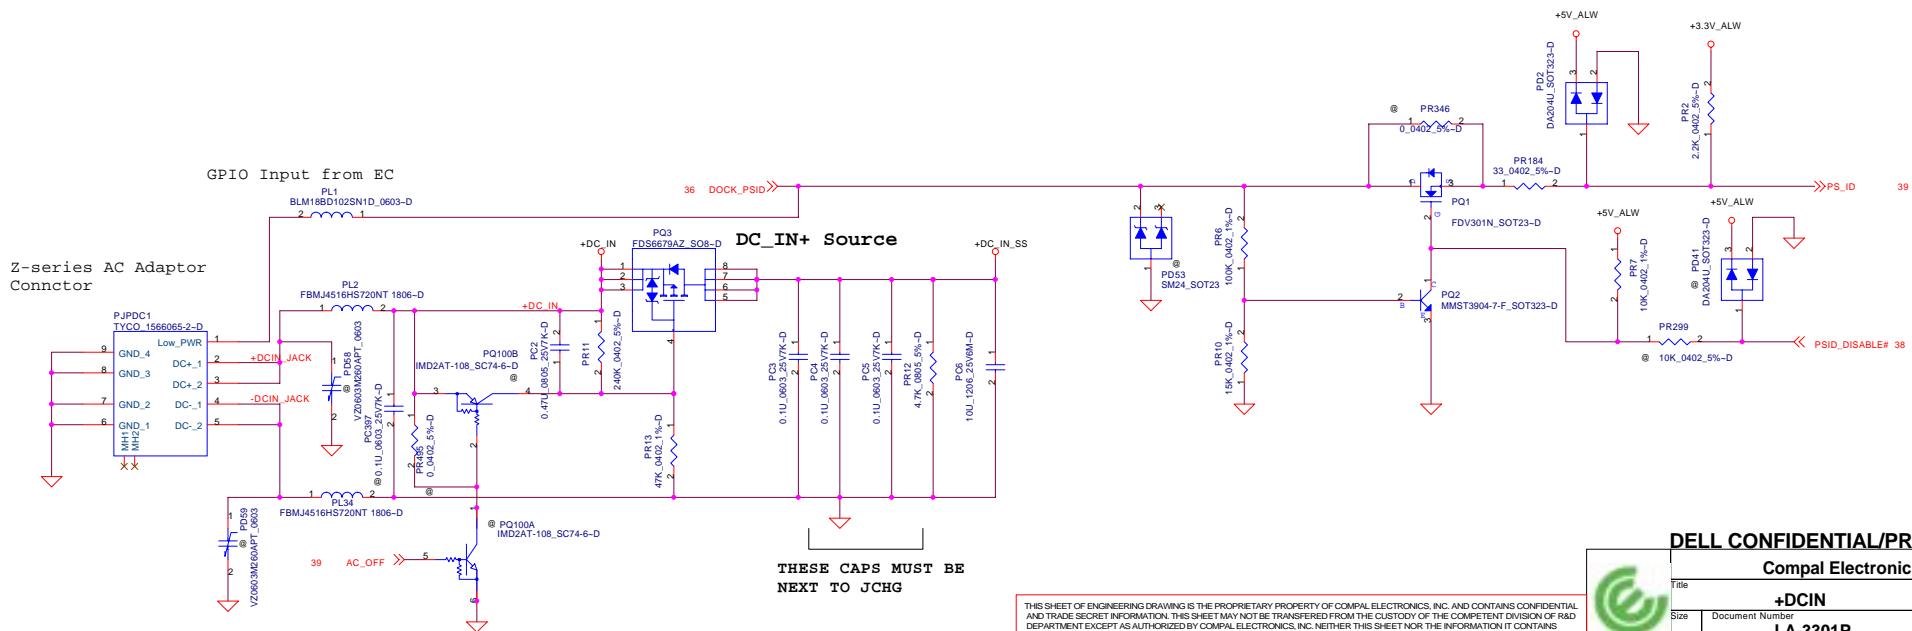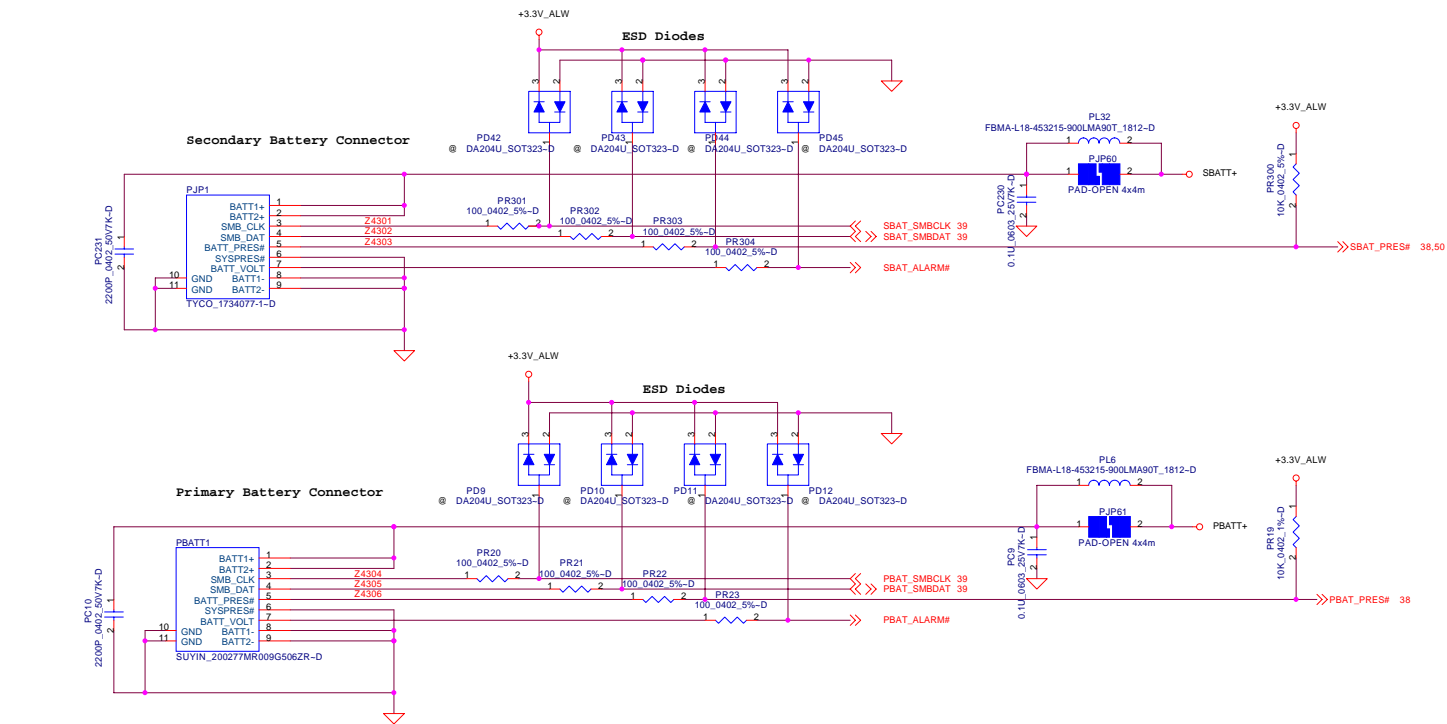

THESE CAPS MUST BE
NEXT TO JCHG

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.

+DCIN

LA-3301P

Date: Monday, February 26, 2007 Sheet 44 of 58

+3.3V_ALWP/ +5V_ALWP/ +5V_ALW2 / +15V_ALWP

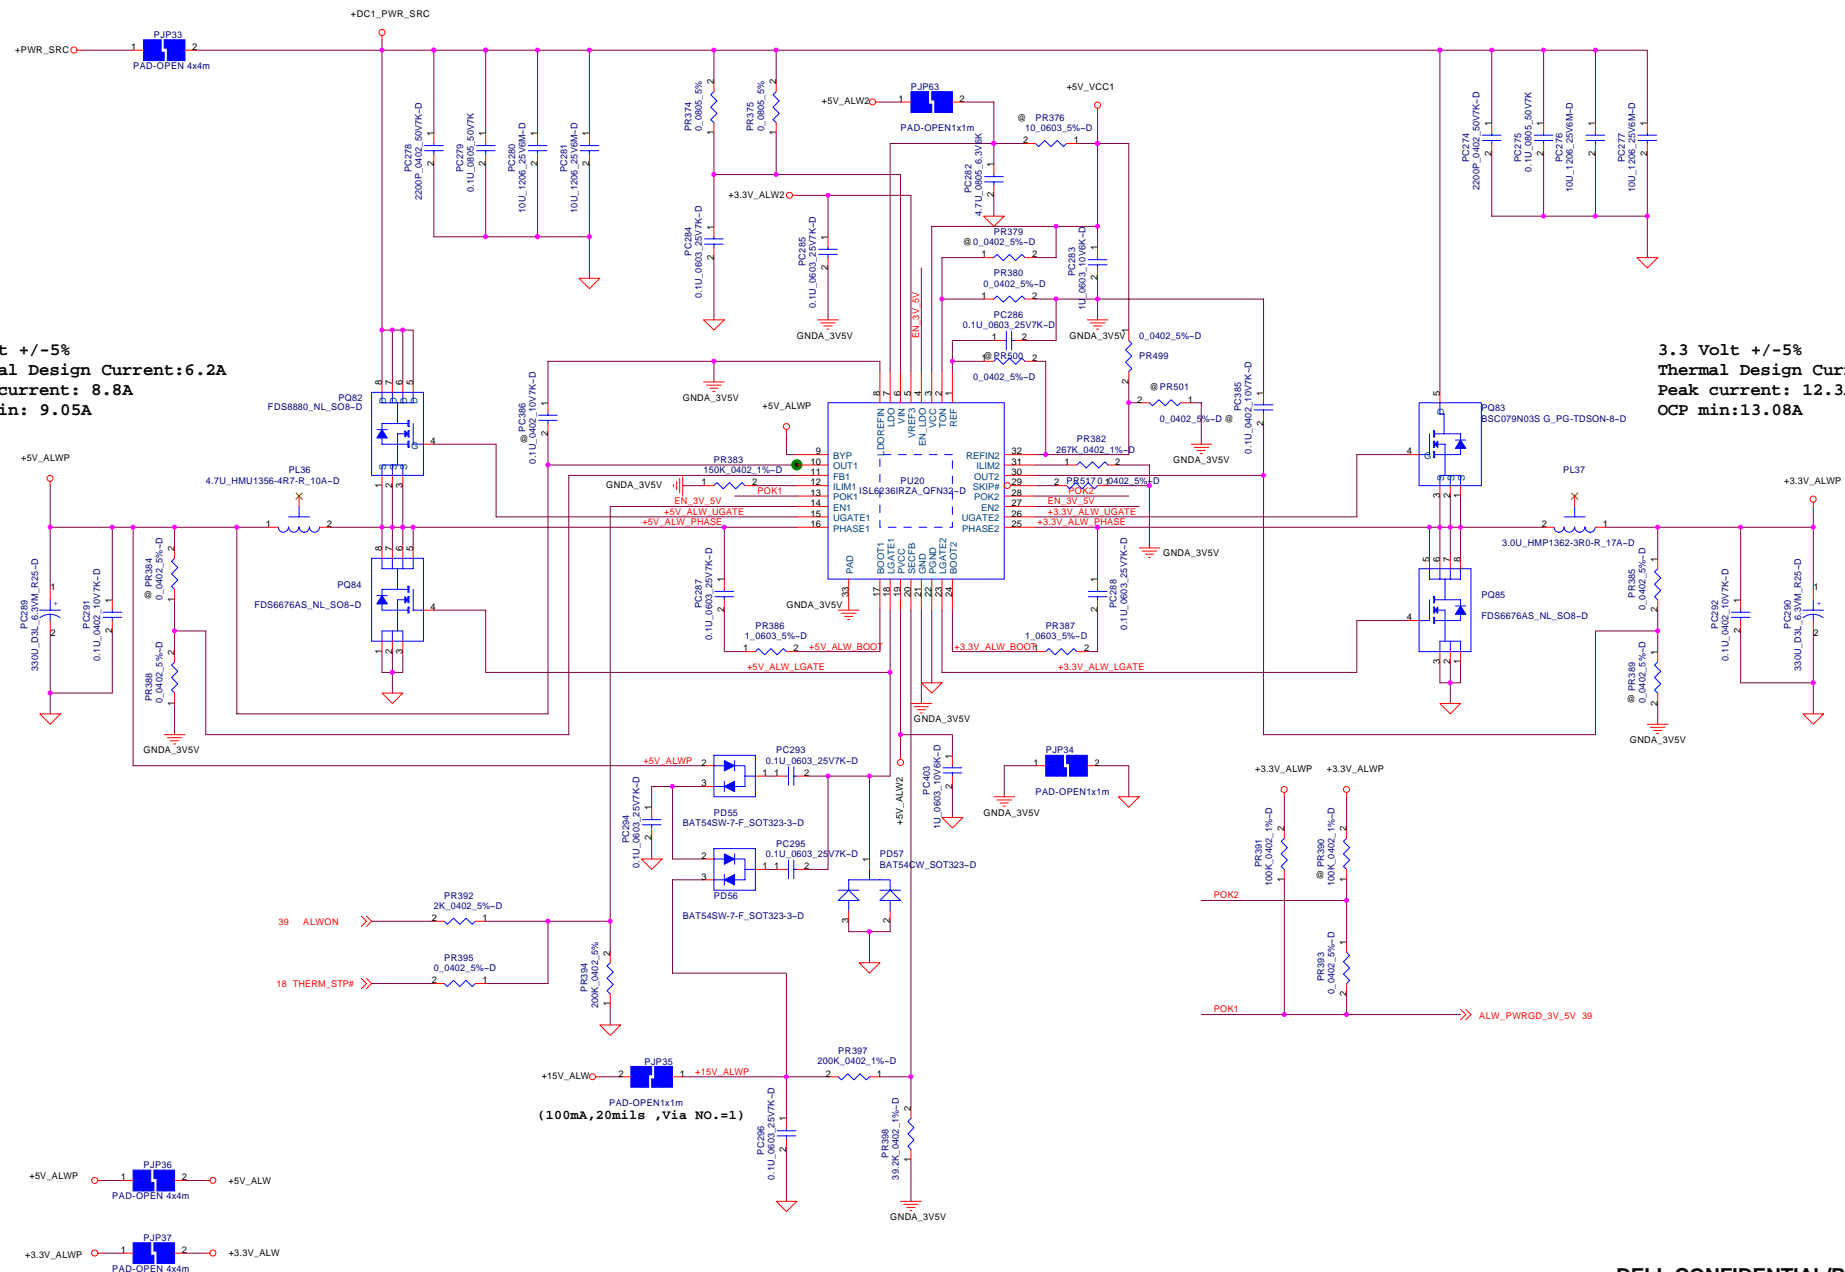

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

DC/DC +3V/ +5V

LA-3301P


Date: Monday, February 26, 2007 Sheet 45 of 58

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.			
Title P47-PWR 1.25V/1.8V/LDO Vtt 0.9V			
Size	Document Number LA-3301P		Rev 0.0
Date	Monday, February 28, 2007	Sheet 46 of 58	

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

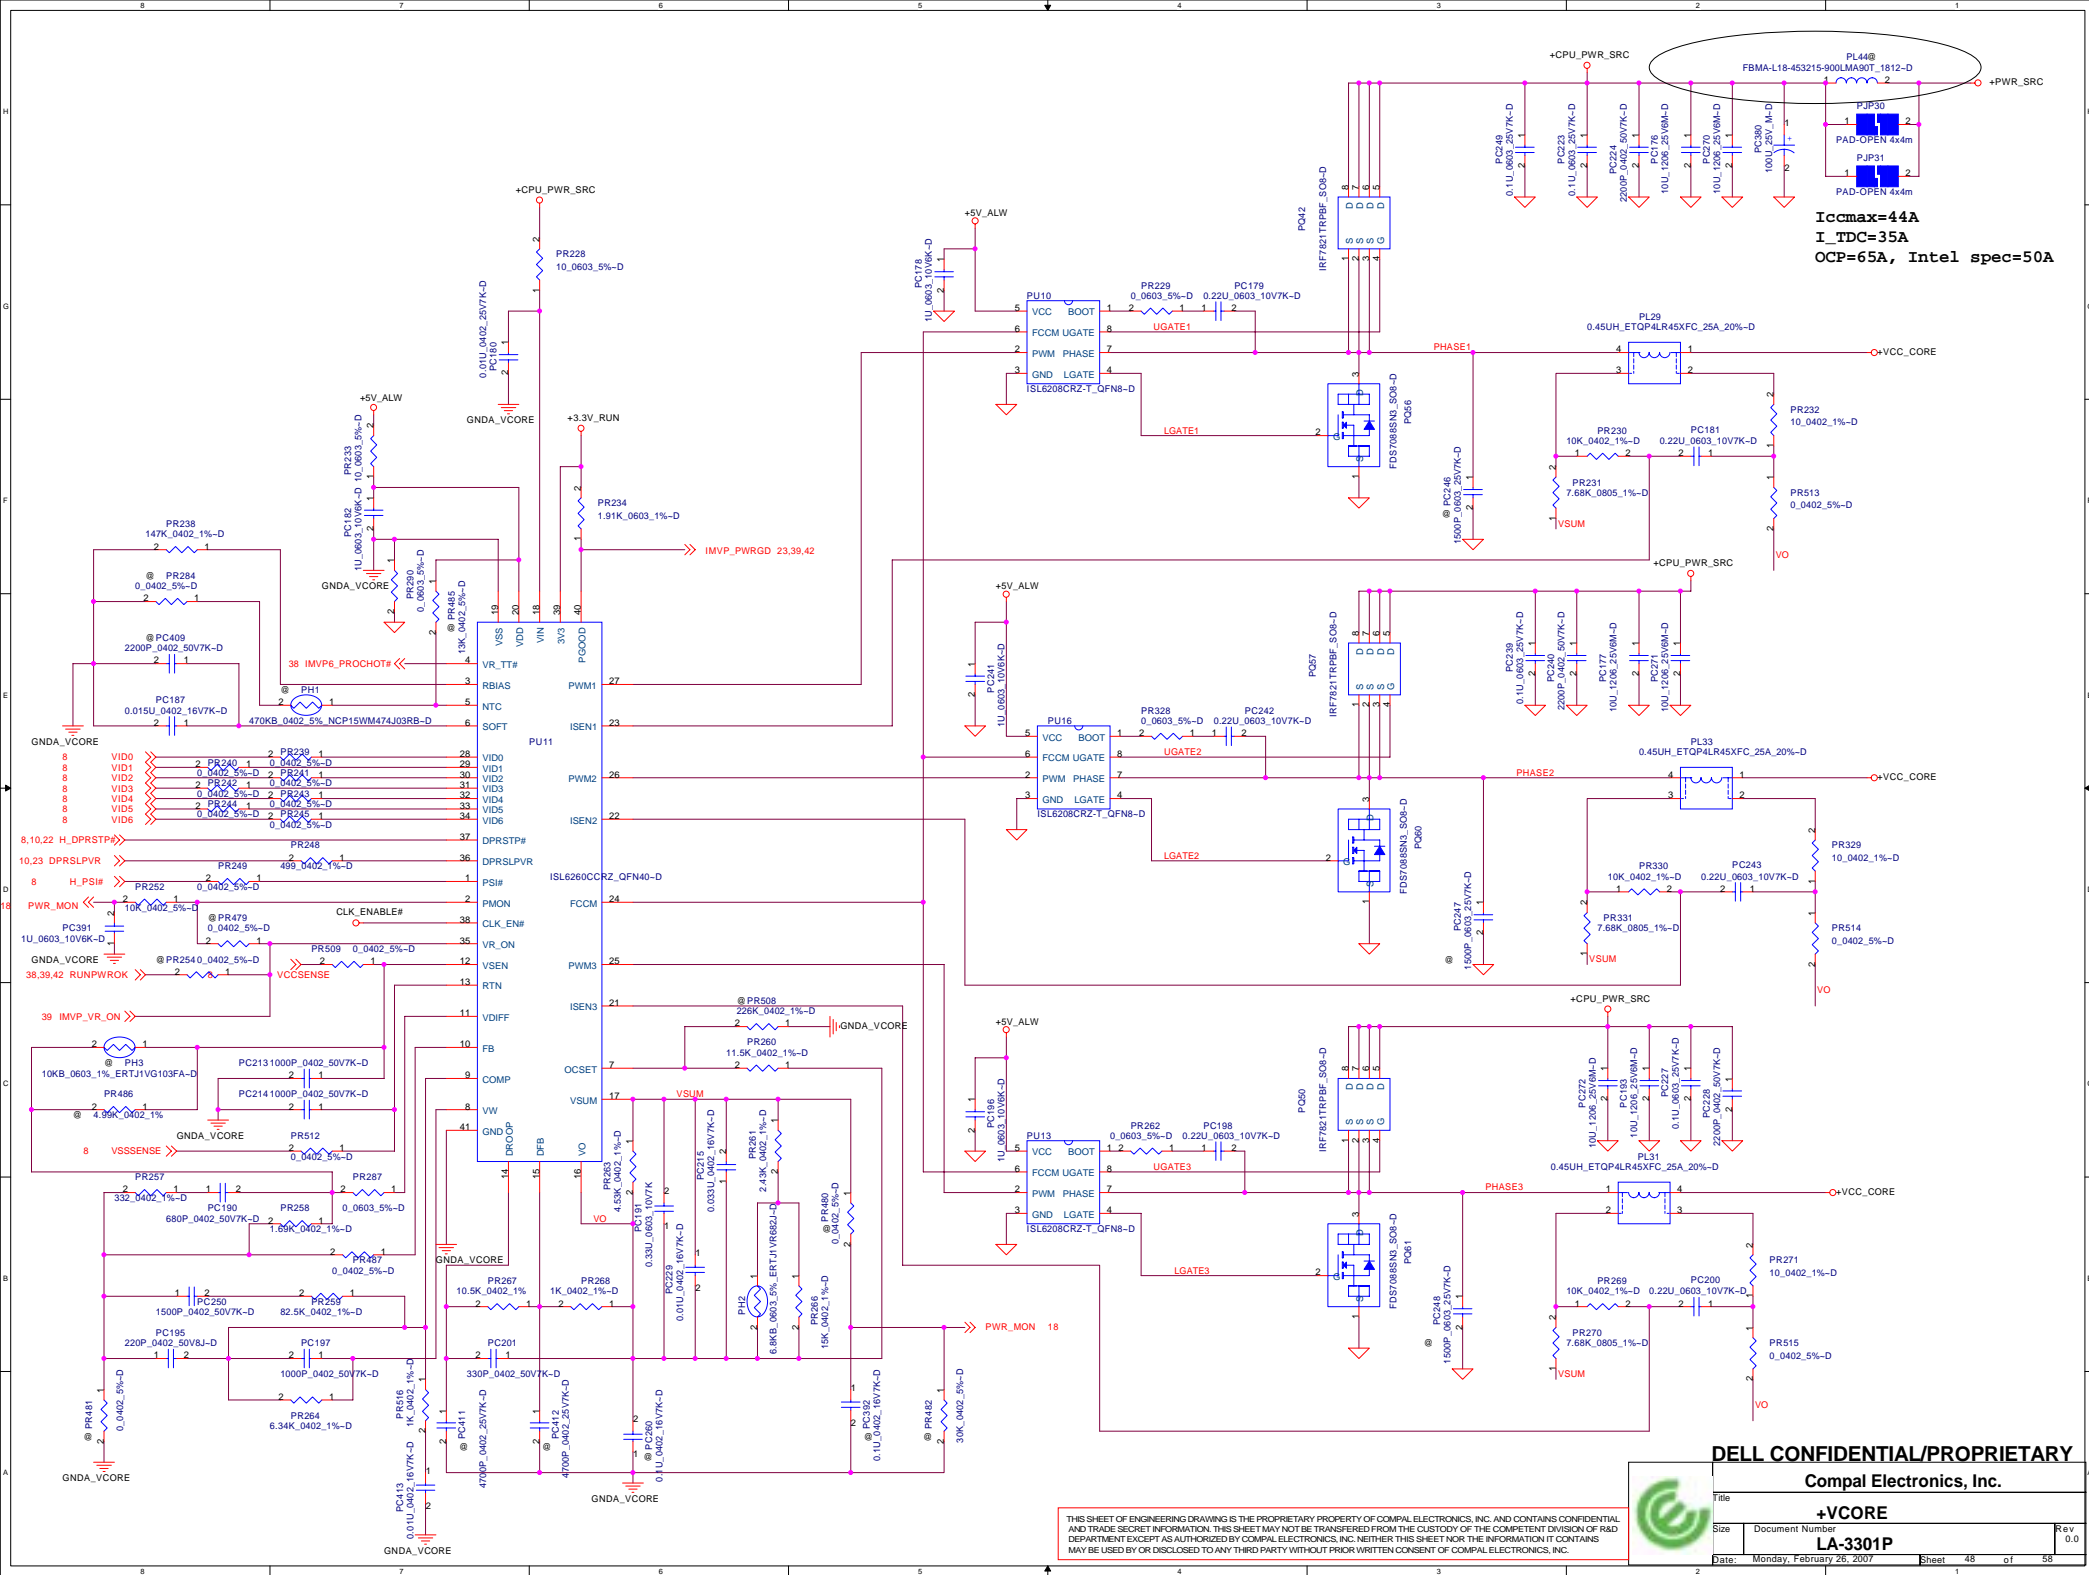

Iccmax=44A
I_TDC=35A
OCP=65A, Intel spec=50A

DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.


+VCORE

LA-3301P

Rev 0.0
Date: Monday, February 26, 2007
Sheet 48 of 58

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

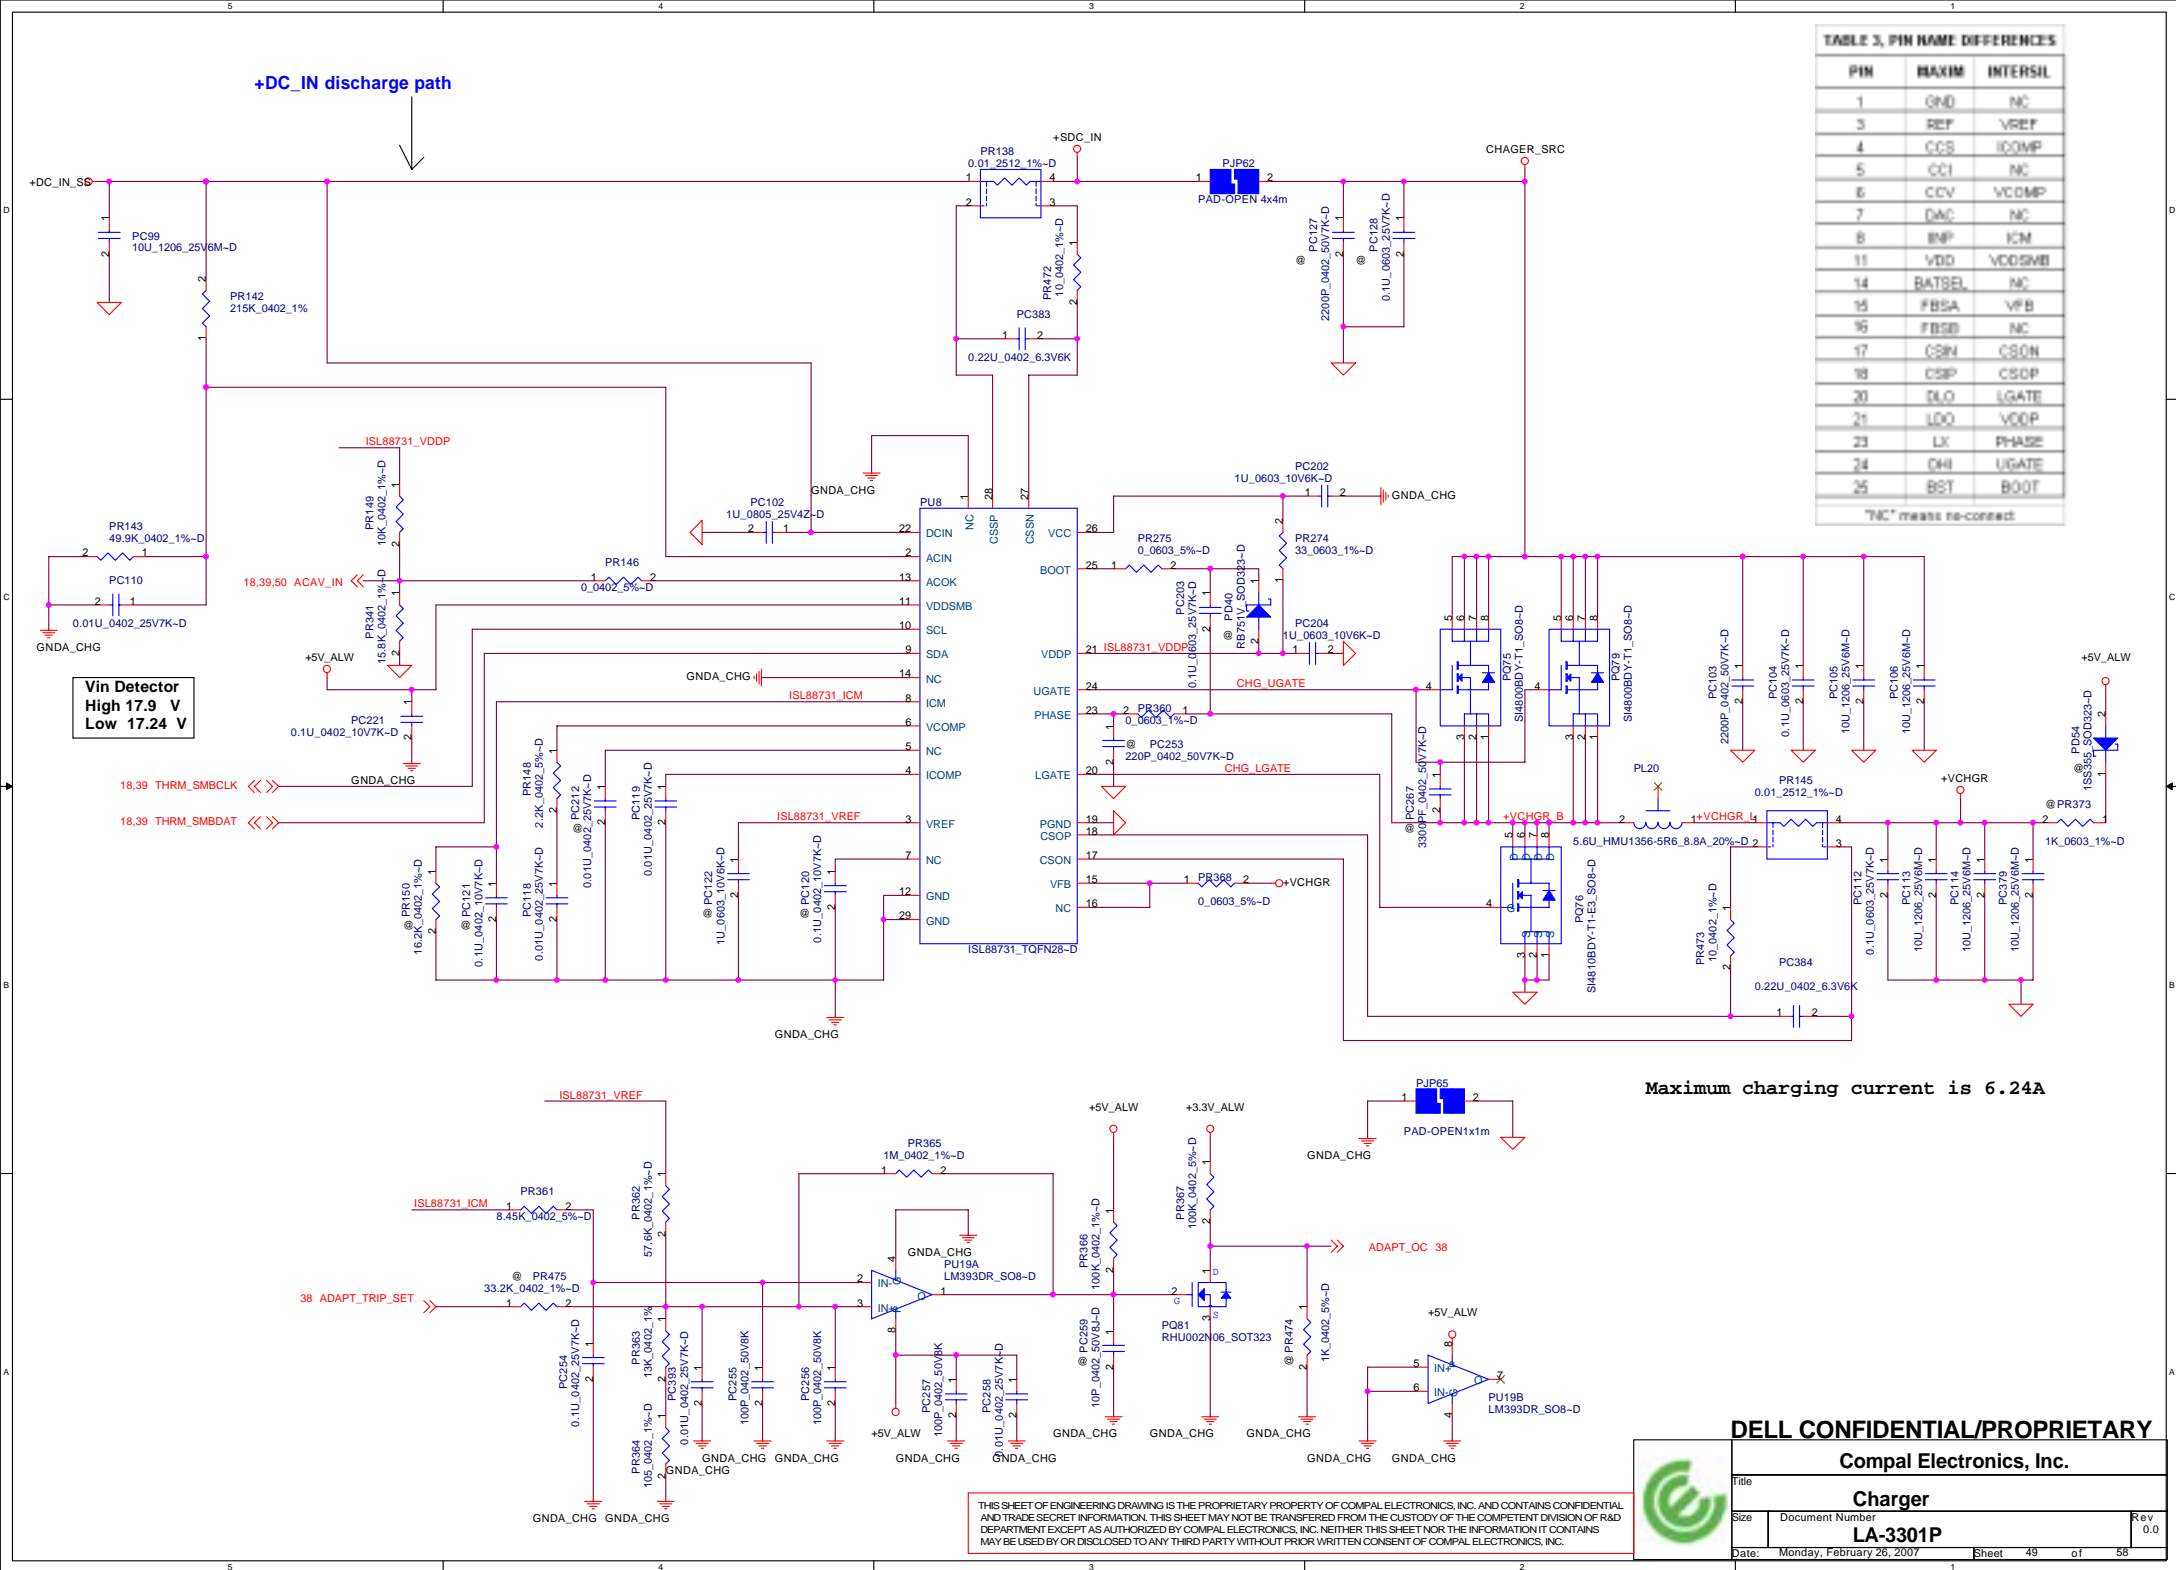

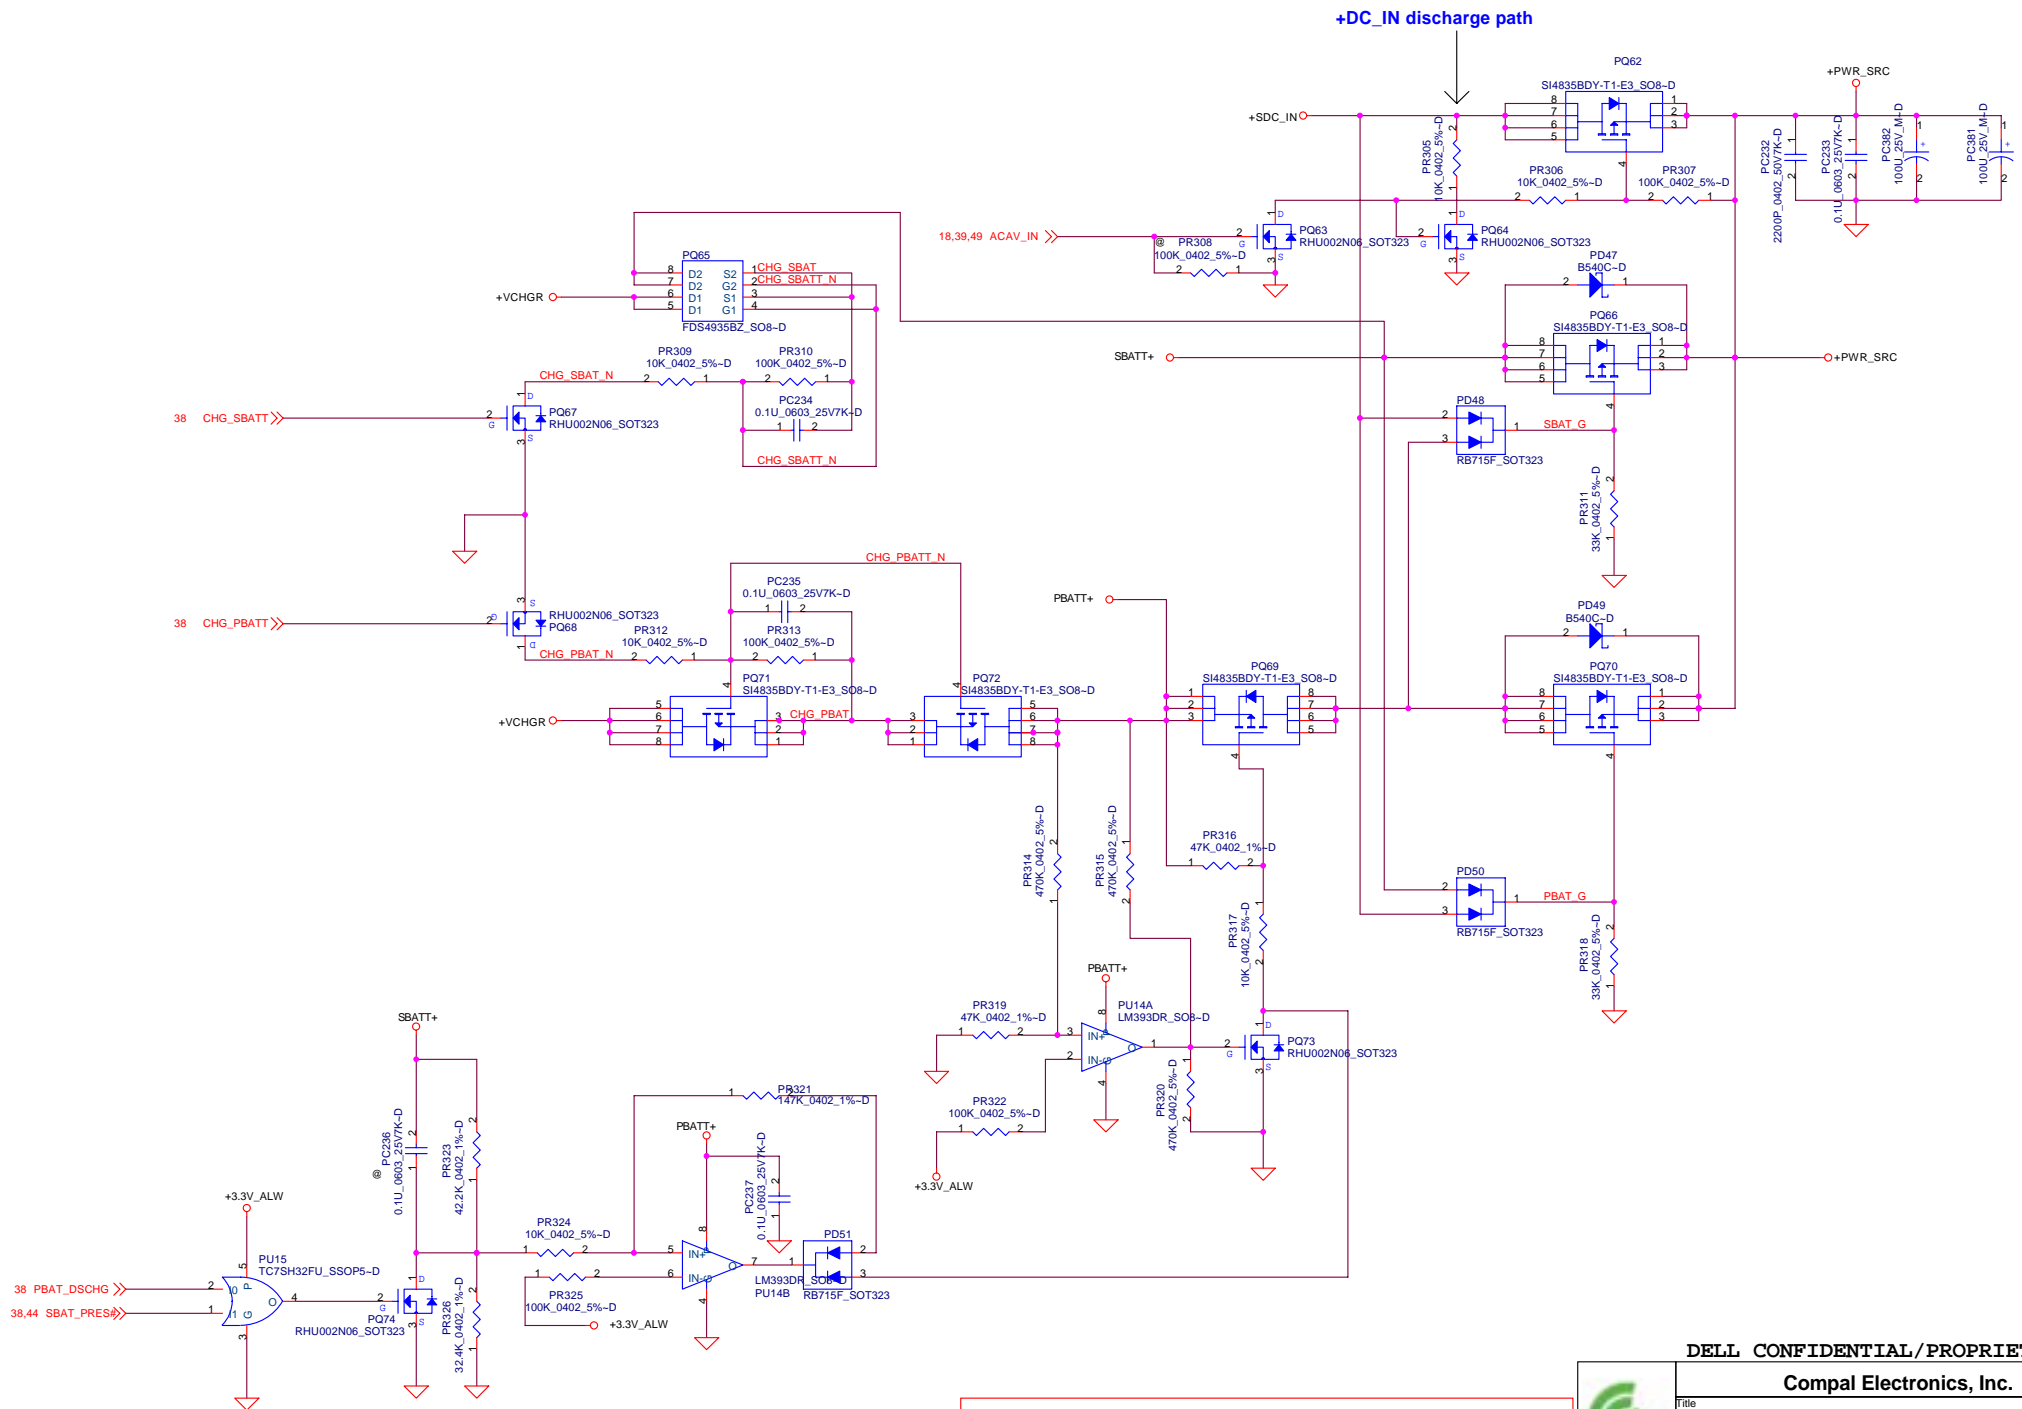

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.




DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.



Selector

LA-3301P

Date: Wednesday, February 28, 2007 Sheet 50 of 58

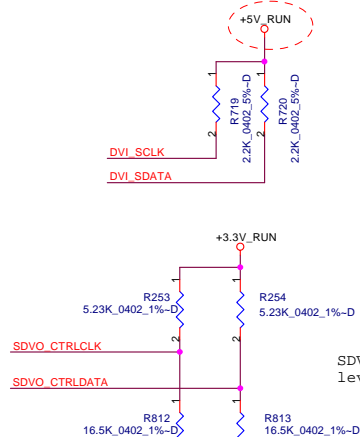

SDVO_CTRLCLK, SDVO_CTRLDATA level is 2.5V

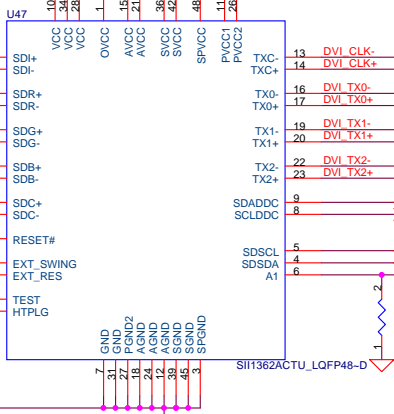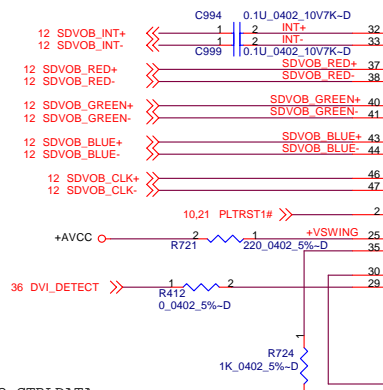

A1 LOW: Address = 0x70
HIGH: Address = 0x72

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Internal LVDS

LA-3301P

File	Document Number	Rev
Size	1.0	
Date	Monday, February 26, 2007	Sheet 51 of 58

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
1	38	HW	08/2/2006	Compal	BID change to X01	Pop R108, depop R106	X01
2	18	HW	08/10/2006	Compal	Change SOT23 package to SOT323 package	Change Q102, to SOT323 package	X01
3	7	HW	08/21/2006	Compal	BITS issue WI86517 (S5 state back driver issue)	Change R324 pin1 connect from +3.3V_ALW to +3.3V_SUS	X01
4	41	HW	08/21/2006	Compal	Bits issue WI84312 (Derating issue)	Change R151 from 30 ohm to 75 ohm	X01
5	23	HW	08/21/2006	Compal	Bits issue WI86509	Populate R761 and change value from 100k to 10k. Change R761 pin1 connect from +3.3V_ALW to +3.3V_SUS	X01
6	12	HW	08/21/2006	Compal	Bits issue WI86510	Remove R390, R393. Connect LCTLA_CLK and LCTLB_DATA to GND	X01
7	39	HW	08/21/2006	Compal	Bits issue WI86511	Add R401 (100K) for signal BC_DAT pull up to +3.3V_ALW	X01
8	37	HW	08/21/2006	Compal	Bits issue WI86512	Change R131 to no-stuff and from 4.7k to 100k per SMSC	X01
9	23	HW	08/21/2006	Compal	Bits issue WI86516	R509 PU for SIO_EXT_SMI# change from +3.3V_ALW to +3.3V_SUS to prevent backdrive through the ICH in S4/S5	X01
10	38,39	HW	08/21/2006	Compal	Bits issue WI86518	Swap PSID GPIO from ECE5018 pin 71 with MEC5025 ITP_DBRESET#/HDT_RESET# pin 55	X01
11	38,39	HW	08/21/2006	Compal	Bits issue WI86531	Move BEEP (ECE5018 GPIOB[6]) to SGPIO46 of MEC5025	X01
12	18	HW	08/21/2006	Compal	Bits issue WI86752	Change pull-up rail for R773 from +5V_SUS to +3.3V_SUS	X01
13	21	HW	08/30/2006	Compal	Bits issue WI86530	Move SB_NB_PCIE_RST# to GPIO4/PIRQG# pinF12 per M08 design, add R631 (20K ohm) for pull down	X01
14	21	HW	09/7/2006	Compal	Bits issue WI86529	Move SB_WLAN_PCIE_RST# to GPIO3/PIRQF# U32 pin G11 per M08 direction, add test point T1 on pin F18	X01
15	39	HW	09/7/2006	Compal	Bits issue WI86376. Due to increase in number of payloads the BIOS is carrying	Change U23 from (ST M25P80 8M bit) to) MXIC MX25L1605AM2C 16M bit)	X01
16	43	HW	09/11/2006	Compal	Bits issue WI90535	Change Q5 to MMBT3906WT1G, R15 to 150 ohm. Add R638 on LED_WLAN_OUT# pull up to +3.3V_WLAN. Add R639 (10K ohm) in series on LED_WLAN_OUT#	X01
17	7	HW	09/14/2006	Compal	Briscoe ESD/EMI Improvement Requests on PT	Remove ITP port and just keep ITP test point	X01
18	43	HW	09/14/2006	Compal	Bits issue WI90709	Remove R73, R178, C192, and C193	X01
19	34	HW	09/14/2006	Compal	Bits issue WI90705	Add SMBus isolation circuit for WLAN, R640,R645,R660,R662,Q45,Q46	X01
20	34	HW	09/14/2006	Compal	Bits issue WI90691	JMINI1 connect to +3.3V_RUN. Removed C427	X01
21	12	HW	09/14/2006	Compal	Shunt caps on LVDS for improving WWAN	Add C181,C192,C193,C196,C207,C209,R667,R685,R686, R687,R688 cross LVDS signals	X01
22	27	HW	09/14/2006	Compal	Bits issue WI90516	Remove C759 from mic amp bias circuit	X01
23	26	HW	09/14/2006	Compal	Bits issue WI90487	Populate R541to cut BEEP level in half	X01
24	43	HW	09/14/2006	Compal	Bits issue WI89631	populate EMI Clips Clip1, Clip2, Clip3, Clip4, Clip5, Clip6	X01

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Changed-List History

LA-3301P

Date: Wednesday, February 14, 2007 Sheet 52 of 58

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
25	23	HW	09/14/2006	Compal	Bits issue WI89409	No stuff R516, add R690 (8.2K ohm) for pull up ICH8 pin AF22 to +3.3V_SUS	X01
26	25	HW	09/14/2006	Compal	Bits issue WI89407	Add Q68, Q69, R691, R692 for HDDC_EN and MODC_EN circuits	X01
27	41	HW	09/14/2006	Compal	Bits issue WI89394	Change connect R765 pin1, R623 pin1, R621 pin1, R766 pin1 from +5V_ALW to +5V_ALW2	X01
28	37,39	HW	09/14/2006	Compal	Bits issue WI89379	Change R387,R389 from 1M to 2.7K. Add R778,R779 for AUX_ON,AC_OFF	X01
29	34	HW	09/15/2006	Compal	Bits issue WI90698	No stuff C16	X01
30	39	HW	09/15/2006	Compal	Bits issue WI92249	Change R730 from 100K to 4.7K ohm	X01
31	34	HW	09/15/2006	Compal	Bits issue WI92288,WI90714	R660 and R662 connected to CLK_SCLK and CLK_SDATA.	X01
32	37,22,33,28,19,20	HW	09/15/2006	Compal	EMI solutions	Populate RS232 C152,153,154,155,156,157,158,159. Resume ICH_AZ_MDC_BITCLK C656,R123,C128. Add R790,R791,C232, C267. Change L63,L65 from 0603size to 0805size. Add C309,C316 for LOM. Add C427,C463 for LVDS. Add fuse F3, R792 for CRT. Populate C660, R545 (10 ohm),C721 (10P)	X01
33	23,36	HW	09/18/2006	Compal	Bits issue WI92298	Move SIO_EXT_SCI# from to ICH8 GPIO11/SMBALERT# pin AG22 to GPO12 pin AC19. Remove D22 and R761 and net DOCK_DET#	X01
34	23	HW	09/18/2006	Compal	Bits issue WI92299	ICH8 Pin AG22 tie to LOM_ICH_SMBALERT#. Add R793 (0 ohm) series on LOM_ICH_SMBALERT# and LOM_SMB_ALERT#. Change R730 pull up rail from +3.3V_ALW to +3.3V_LAN. Add R807 pull up to +3.3V_SUS for LOM_ICH_SMBALERT#	X01
35	39	HW	09/18/2006	Compal	Bits issue WI92301	Move ALW_PWRGD_3V_5V from MEC5025 pin 18 to MEC5025 pin 29. Remove 3.3V_5V_SUS_PWRGD from MEC5025 pin 29	X01
36	38,39	HW	09/18/2006	Compal	Bits issue WI92305	Swap DOCK_SMB_PME and DOCK_SMB_ALERT# from MEC5025 pin3 and ECE5028 pin76	X01
37	39,42	HW	09/18/2006	Compal	Bits issue WI92308	Removed 3.3V_LAN_PWRGD from MEC5025 KS015/GPIO5. Remove U52,Q83,D29,R89,R98,R381,C784,C182,C183,C184	X01
38	39	HW	09/18/2006	Compal	Bits issue WI92312	Add R795 (0 ohm) pull down for MEC5025 pin 14	X01
39	29	HW	09/19/2006	Compal	EMI issue	Populate R671~R678 and C866~C869. Change L69~L76 from 24NH to 36NH inductor	X01
40	27	HW	09/19/2006	Compal	Bits issue WI90510	Add R796,R797 (0ohm) between L47/L48 and C728/C730	X01
41	6	HW	09/20/2006	Compal	Bits issue WI93162	NC JITP pin 1,2,3,5,7,11,12,13,15,17,19,21,23. Add test point T47~T52 for ITP_BPM#0~ITP_BPM#5. Remove R322	X01
42	28	HW	09/20/2006	Compal	Bits issue WI92858	Change R669 to from 1.15K to 1.13K. Depop C771 & C772. Change C861 and C862 to 22pF	X01
43	38	HW	09/20/2006	Compal	Bits issue WI92857	Add no-stuff series 0-ohm for ITP_DBRESET# on ECE5028	X01
44	19	HW	09/20/2006	Compal	WWAN noise issue	Add R808,R809,R810,R811 series for LCD_DDCCLK, LCD_DDCDATA, LCD_SMBCLK, LCD_SMBDAT	X01
45	33	HW	09/21/2006	Compal	Bits issue WI93157	Remove R586 and make JMDC pin2 NC	X01

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Changed-List History

Size	Document Number	Rev
	LA-3301P	1.0
Date:	Wednesday, February 14, 2007	Sheet 53 of 58

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
46	34	HW	09/21/2006	Compal	Bits issue WI93158	Depop Q45, Q46	X01
47	51	HW	09/22/2006	Compal	Bits issue WI93586	Add R812,R813 (9.09K ohm) and chagne R253,R254 to 2.94K ohm for SDVO_CTRLCLK /DAT voltage divider	X01
48	6	HW	09/25/2006	Compal	Bits issue WI93403	C484 change to 33pF, C861/C862 change to 22pF	X01
49	29	HW	09/26/2006	Compal	Bits issue DF86424	No Populate C866-C869/R671-R678	X01
50	40	HW	09/26/2006	Compal	EMI request	Add D37-D40 for stick point signals	X01
51	32	HW	09/27/2006	Compal	EMI request	Add FUSE4,FUSE5	X01
52	18	HW	10/05/2006	Compal	Bits issue WI94892	Populate R771, C750, R772, Q102, R773	X01
53	30	HW	10/05/2006	Compal	Bits issue WI95910	Change R603 from 6.2k to 5.9k. Change C805 from 820pF to 270pF	X01
54	38,23 12,27,6	HW	10/05/2006	Compal	Bits issue WI95932	No stuff R227, R221, C89, C93, C97, c401, C92, r72, C90, C88. Change R369 to 3.3K 1%. No stuff C775-C781, C785. No stuff R514 (no iAMT). Populate R515.	X01
55	36	HW	10/14/2006	Dell	Bits issue WI97539	Added signal DOCK_DET# to JDockBpin137, pin205 and Q3pin2	X02
56	9	HW	10/17/2006	Dell	Bits issue WI97840	Add 0.1 uf (0402) caps on +Vcc_Core to Gnd. Four total, bottom of board. (C870 ~ C873)	X02
57	23	HW	10/18/2006	Dell	Bits issue WI98222 (Change for ASF2.0 due to ICH8M errata)	1. No stuff R502, R503 2. Connect the pad of R503.2 to the pad of R498.2 3. Connect the pad of R502.1 to the pad of R499.2	X02
58	38	HW	10/24/2006	Dell	Board ID Changed to X02	Populated R106, R107. Depopulated R108, R109.	X02
59	13	HW	10/27/2006	Dell	Bits issue WI100037. Intel CRT noise issue	Change L36 to 100 ohm resistor and change C722 to 22nF. Replace C569 with a 0603 1uF cap	X02
60	23	HW	10/30/2006	Dell	Bits issue WI100049	Add R816,C874 for USB_IDE#. R817,C875 for SIO_EXT_WAKE#. R819,C876 for PCIE_MCARD1_DET#. R820,C878 for USB_MCARD1_DET#. R818,C877 for USB_MCARD2_DET#. Remove net RSVD_GPIO6 and R513	X02
61	51	HW	11/2/2006	Dell	Bits issue WI100826	Change Change R812, R813 from 9.09K 1% to 13.7K 1%. Change R253, R254 from 2.94K 1% to 4.32K 1%	X02
62	28	HW	11/7/2006	Dell	Bits issue WI102451	Change L64,L66,L67,L68 from BLM18AG601SN1D to BK1608LM182. Change R668 to L88 BK1608LM182. Change L63, L65 from BLM21AG601SN1D to BK2125LM182. Chagne C850,C852,C856,C858 to 47pF caps. Change C849 to 1000pF. Populate C863, C864	X02
63	6,23,34	HW	11/8/2006	Dell	Bits issue WI103311	Change R309 from 8.2K to 2.2K. No stuff R820. No stuff R550	X02
64	2	HW	11/8/2006	Dell	Correct Block diagram	Correct block diagram	X02
65	39	HW	11/14/2006	Dell	Bits issue WI103986	Change C379 from 22pF to 33pF per KDS X'tal report	X02

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Changed-List History

LA-3301P

Date: Wednesday, February 14, 2007 Sheet 54 of 58

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
89	19	HW	2/28/2007	Compal	Bits issue WI125145.DPST enablement for UMA	Populate R156 (0_0402_5%)	A00
90	39	HW	3/1/2007	Compal	Bits issue WI125577	Populate R92. Depop R93	A00
91	13	HW	3/1/2007	Compal	Bits issue WI125883	Add note "C533,C534,C536,C545,C553,C579 are being replaced by 0-ohm 0805 resistor" on page 13	A00
92	18	HW	3/7/2007	Compal	Bits issue WI127297	Populate R441	A00
93	27	HW	3/7/2007	Dell	Bits issue WI127300	Change U40 from 74AHC1G08 to 74AHCT1G08	A00

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title	Changed-List History
-------	----------------------

Size	Document Number	Rev
	LA-3301P	1.0
Date:	Wednesday, March 07, 2007	Sheet 55 of 58

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
66	25,41	HW	11/20/2006	Compal	Bits issue WI105207	Change net name from +5V_ALW2 to +3.3V_ALW2 at R618.1, R626.1, R623.1, R621.1, R766.1, R765.1	X03
67	38,39	HW	11/21/2006	Dell	Bits issue WI105754	Change R794 pin1 from +5V_ALW to +3.3V_ALW. Change R245 pin1 from +3.3V_ALW to +5V_ALW	X03
68	26	HW	11/21/2006	Dell	Bits issue WI105758. Updates for potential Back Drive	Add 100kohm resistor R721 between U35 pin 40 and +3.3V_RUN and 1000pF cap C759	X03
69	51	HW	12/1/2006	Dell	Bits issue WI100826	Change R253, R254 from 2.94K_1% to 5.23K_1%. Change R812, R813 from 9.09K_1% to 16.5K_1%	X03
70	21,23,34	HW	12/1/2006	Dell	Bits issue WI106999	Please populate R820 with a 4.7k-ohm resistor. Move signal PCIE_MCARD2_DET# from ICH8m GPIO20 pinAE11 to PIRQH#/GPIO5 pinB3. Delete R457 and net ICH_GPIO5_PIRQH#. Populate R550	X03
71	41	HW	12/1/2006	Dell	Bits issue WI107466. +2.5V_LAN in-rush current test fai.	Populate C208	X03
72	27	HW	12/6/2006	Dell	Bits issue WI107896	Change R554 from 10K to 0 ohm	X03
73	36,38	HW	12/6/2006	Dell	Bits issue WI108259. Per M08 GPIO map rev A15 Change list	Change net DOCK_SMB_PME to DOCK_SMB_PME#	X03
74	9	HW	12/6/2006	Dell	Bits issue WI108223	Change C177,C179,C178,C366,C338,C365 to EEFSX0D221E7 220uF	X03
75	38	HW	12/11/2006	Dell	Change Board ID from X02 to X03	Populate R108, Depop R106	X03
76	39	HW	12/14/2006	Dell	Bits issue WI110179	Add EC_FLASH_PAD pin1 connect to +3.3V_ALW,pin2 connect to R76 pin1 and R80 pin1	X03
77	27	HW	12/15/2006	Dell	Bits issue WI110158	Add R822 (1M_0402) from Pin 10 (C1P) pin of MAX9789A to ground	X03
78	13,14	HW	12/15/2006	Dell	Bits issue WI109712	Change C544,C560,C615,C551,C564,C593 to X6S SPEC	X03
79	26	HW	12/18/2006	Dell	Bits issue WI110749	Add R823 (10K_0402) to ground on pin 47 of STAC9205 (U37)	X03
80	29	HW	12/20/2006	Dell	Bits issue WI111288	Change R683 from 150ohms to 110 ohms, R684from 150ohms to 200ohms	X03
81	12,23 28	HW	12/25/2006	Dell	Change AC Coupling Cap SPEC for PCIE	Change C500~C507,C664,C666~C670,C851,C853,C994,C999 from 0.1uF Y5V to 0.1uF X7R	X03
82	38	HW	1/26/2007	Dell	Bits issue WI115658. M08 GPIO map rev A16 change	Change EC5028 GPIOF4 from BID2 to CHIPSET_ID.	A00
83	38	HW	1/26/2007	Dell	Change BID to from X03 to A00	Depop R107,R108. Populate R106,R109	A00
84	23	HW	2/12/2007	Dell	Bits issue WI121957	Add R834 (1M_0402_1%) for ICH_LAN_RST#	A00
85	27	HW	2/12/2007	Dell	Bits issue WI121438	Change R565 from 10K to 100k ohm	A00
86	41	HW	2/12/2007	Dell	Bits issue DF116813	Depop C194, changed C815 from 4700pF to 2200pF	A00
87	13	HW	2/27/2007	Dell	Bits issue WI109712. Because can't find 2nd source	Change C560 and (C615, C551, C564) Back to X5R	A00
88	23	HW	2/27/2007	Dell	Bits issue WI125173. Per Intel's latest recommendation	Change R834 from 1M to 10K	A00

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.

Chaged-List History			
Title	LA-3301P		
Size	Document Number	Rev 1.0	
Date	Wednesday, February 28, 2007	Sheet	55 of 58

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
1	48/50	PWR	9/14	Elick	change the AL CAP to 2000hr	change PC380 from SF10004M08L to SF000000S8L. change PC381 from SF10004M08L to SF000000S8L. change PC382 from SF10004M08L to SF000000S8L.	0.1
2	45	PWR	9/14	DELL	BITS-WI91007 change to correct part for 15ALW.	change PD55 from SCSB717F08L to SCS00001U8L. change PD56 from SCSB717F08L to SCS00001U8L.	0.1
3	48	PWR	9/14	DELL	change to PSL of DELL	change PH2 from SL20000030L to SL200000F8L	0.1
4	44	PWR	9/14	DELL	change to PSL of DELL	change PL1 from SM01001680L to SM010008U0L.	0.1
5	44	PWR	9/14	DELL	change to PSL of DELL	change PL2 from SM01001418L to SM010009C8L. change PL34 from SM01001418L to SM010009C8L.	0.1
6	46	PWR	9/14	DELL	BITS-WI89364 The 0.9V_DDR_VTT_PWRGD net is not used at the MEC5025. The 0.9V_DDR_VTT_PWRGD net should be no connect at the MEC5025 pin 73.	remove PR437, PR438, PR441, PQ93 and PQ94.	0.1
7	45	PWR	9/14	DELL	BITS-WI90985 following DELL rule	Change PC285 pin 2 pad connection from PGND to AGND.	0.1
8	45	PWR	9/14	DELL	BITS-WI90999 Change PQ83 from FDS8880 to BSC079N03SG PPAK	Change PQ83 from SB000004U8L to SB000004D8L.	0.1
9	45	PWR	9/14	DELL	BITS-WI91012 change to correct current limits	Change PR383 from 124k(SD03412438L) to 150K(SD03415038L). Change PR382 from 187k(SD03418738L) to 226K(SD03422638L).	0.1
10	47	PWR	9/14	DELL	BITS-WI91287 following DELL rule	Depopulate PR415 and PR416 resistors.	0.1
11	47	PWR	9/14	DELL	BITS-WI91288 Change PQ86 from SI4392DY to SI4682DY.	change PQ86 from SB54392008L to SB000006N0L	0.1
12	49	PWR	9/14	DELL	BITS-WI91291 be compliant with the reference schematic.	Change PR274 from 4.7 ohm(SD000006T8L) to 33 ohm(SD014330A8L). Populate PR373 and PD54.	0.1
13	47	PWR	9/14	DELL	BITS-WI91374 following DELL rule	Change PR408 from 75K(SD03475028L) to 82.5K(SD00000278L).	0.1
14	46	PWR	9/14	DELL	BITS-WI91672 Change in 1.25V_RUN_PWRGD circuit.	Change the node name connected to pin 2 of PR431from +3.3V_ALW to +3.3V_SUS. Depopulate PR431.	0.1
15	44	PWR	9/14	DELL	BITS-WI91689 DC IN schematic changes.	Change PL1 from SM01001680L to SM010008U0L. Change PQ100 from SI2301BDS(SB923010020) to PQ100A depopulated IMD2A(SB000009N8L). Change PQ101 from SI2301BDS(SB923010020) to PQ100B depopulated IMD2A(SB000009N8L). Change PR12 from 10K,0603(SD01310028L) to 4.7K,0805(SD00247018L).	0.1

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

				DELL CONFIDENTIAL/PROPRIETARY			
Title Changed-List History 1							
Size	Document Number LA-3301P						Rev 0.6
Date:	Wednesday, February 28, 2007						Sheet 56 of 58

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
16	46	PWR	9/15	DELL	BITS-WI92156 correct the current limit on 1.25V output	change PR425 from 39.2K(SD03439228L) to 51.1K (SD03451128L)	0.1
17	46	PWR	9/15	DELL	BITS-WI91655 Add 0.1uF connected to the pins 1 and 2 of PU24	Add PC410(SE042104K8L). One pad connected to the pins 1 and 2 of PU24 . The other pad is connected to PGND.	0.1
18	46	PWR	9/15	DELL	BITS-WI91929 correct the current limit on 1.8V output	change PR426 from 110K(SD03411038L) to 130K (SD03413038L)	0.1
19	48	PWR	9/18	DELL	BITS-WI92465 improve transients at load dump. and reduce jittering.	Add depopulate PR516(SD03410018L) and depopulate PC413(SE076103K8L) between pin 9 of PU11 and AGND. Add depopulated PC411(SE075472K8L),4700pF between pin 14 of PU11 and AGND . Add depopulated PC412(SE075472K8L),4700pF between pin 15 of PU11 and AGND	0.1
20	44	PWR	9/21	DELL	BITS-WI91689 change PL1 from BK1608HM to BLM18BD102SN1D.	change PL1 from SM010008U0L to SM010007C8L.	0.1
21	48/50	PWR	9/21	DELL	BITS-WI87563 change populate PC380 from 25CE100AX to 25CE100LS change PC381 from 25CE100AX to 25CE100LS change PC382 from 25CE100AX to 25CE100LS	change populate PC380 from SF000000S8L to SF000000T8L. change PC381 from SF000000S8L to SF000000T8L. change PC382 from SF000000S8L to SF000000T8L.	0.1
22	49	PWR	9/29	DELL	match Maxim's response time of ICM input to comparator.	change PR361 from 0 Ohm (SD02800008L) to 8.45K (SD00000068L). change PC254 from 0.01uF 25V (SE068103K8L) to 0.1uF 16V (SE076104K8L).	0.1
23	49	PWR	9/29	DELL	ICM is voltage source and does not need this component.	depopulate PR150.	0.1
24	49	PWR	9/29	DELL	Increase BW from 20kHz to 25kHz while maintaining 80degrees phase margin.	change PR148 from 4.7K (SD03447018L) to 10K (SD03410028L).	0.1
25	49	PWR	9/29	DELL	following DELL rule	depopulate PD54 and PR373	0.1
26	48	PWR	10/27	DELL	Add bead to connect +PWR_SRC to +CPU_PWR_SRC	Add PL44(SM01002078L) to parallel PJP30.	0.2
27	45,46,47	PWR	10/27	DELL	BITS-WI99902 This is to add an optional ultrasonic mode in case the regulators experience an audible noise.	Add PR517(SD02800008L) between pin 29 of PU20 and AGND . Add PR518(SD02800008L) between pin 29 of PU22 and AGND . Add PR519(SD02800008L) between pin 29 of PU21 and AGND .	0.2
28	46	PWR	10/31	DELL	BITS-WI100140 Change PR429 from 0 ohm to 1 ohm	change PR429 from 0 Ohm (SD01300008L) to 1 Ohm(SD013100B8L).	0.2

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL- CONFIDENTIAL/PROPRIETARY

Title **Changed-List History 2**

Size Document Number Rev

LA-3301P 0.6

Date: Wednesday, February 28, 2007 Sheet 62 of 62

Version Change List (P. I. R. List)

[illegible]

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ('DELL'). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

